

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region



Auckland ***Regional*** Council

March 1999

**Auckland Regional Council
Technical Publication No. 90**

ISSN 1172 6415

CHANGES TO TP90 – DECEMBER 2007

Chapter B1 – Section 1.6.3 Mulching

Changes to Pages 13- 14

Definition

The application of a protective layer of straw or other suitable material to the soil surface.

Purpose

To protect the soil surface from the erosive forces of raindrop impact and overland flow. Mulching also helps to conserve moisture, reduce runoff and erosion, control weeds, prevent soil crusting and promote the establishment of desirable vegetation.

Application

This practice applies to any site where vegetation establishment is important for the protection of bare earth surfaces.

Mulching can be used at any time where the instant protection of the soil surface is desired. Mulching can be used in conjunction with seeding to establish vegetation, or by itself to provide temporary protection of the soil surface.

Mulching is used during the winter months (30 April to 1 October) to provide immediate stabilisation. Because grass germination will be too slow to establish effective grass cover using conventional sowing methods.

Design

Not Applicable.

Construction Specifications

Site Preparation

Before Mulching install any needed erosion and sediment control practices such as Runoff Diversion Channels and sediment retention structures.

Mulching

When mulching, use unrotted small grain straw applied at a density of 6,000 kg per ha such that the coverage is consistent or no bare soil is visible through the mulch layer. The mulch layer should remain until alternative stabilisation is achieved. Note that hay does not last long on the ground and remulching may be required.

Ensure the material is free of any noxious plants as identified under the Auckland Regional Council policy. Call the ARC on 0800-80-60-40 or 09-377-3107.

Mulching needs to be spread uniformly. For smaller areas hand spreading of mulch material can be adequate. For larger sites, apply mulch mechanically to ensure an even spread and appropriate application.

Apply fertiliser with Mulching as outlined in Table 1.6 of these Guidelines.

Alternatives such as wood chips and chemical soil binders can be utilised where appropriate. Wood chips are suitable for areas that will not be closely mowed around such as ornamental plantings. They do not require the application of a tackifier and if readily available can be a relatively inexpensive mulch. They are slow to break down and normally require nitrogen application to prevent nutrient deficiency in plants. Do not use woodchips around watercourses or in areas where water can pond.

To avoid water contamination, any alternative to straw mulch must be approved by the Auckland Regional Council.

Another alternative are rovings which are fibres that are teased out from spools of yarn by compressed air and woven onto the surface of the land. They are then stabilised with a tackifier, with seed sown beforehand. These alternatives should be discussed with ARC before their implementation.

A wide range of synthetic mulching compounds are available to stabilise and protect the soil surface. These include emulsions, acrylimides and dispersions of vinyl compounds. They do not insulate the soil or retain moisture when used alone and therefore do little to aid seed establishment. They are also easily damaged by traffic, decompose relatively quickly and can be quite expensive in comparison to organic mulches.

Anchoring Mulch

Anchor Mulch in place immediately after application to avoid or minimise loss by wind or water. Numerous methods are available. Generally, although the Mulch is 'settled' in place by the first rainfall, the Auckland Regional Council also requires it be retained by crimping into the soil with discs or spraying a tackifier with the Mulch. When using some chemical tackifiers, take care to avoid adverse offsite effects of runoff particularly around watercourses.

Chapter B1 – Section 1.8 Stabilised Construction Entrance

Changes to Pages 20 - 21

Definition

A stabilised pad of aggregate on a **woven geotextile** base located at any point where traffic will be entering or leaving a construction site.

Purpose

To prevent site access points from becoming sediment sources and to help minimise dust generation and disturbance of areas adjacent to the road frontage by giving a defined entry/exit point.

Application

Use a Stabilised Construction Entrance at all points of construction site ingress and egress with a construction plan limiting traffic to these entrances only. They are particularly useful on small construction sites but can be utilised for all projects.

Design

- Clear the entrance and exit area of all vegetation, roots and other unsuitable material and properly grade it.
- **Lay woven geotextile; pin down edges and overlap joints;**
- Provide drainage to carry runoff from the Stabilised Construction Entrance to a sediment control measure;
- Place aggregate to the specifications below and smooth it.

Table 1.8 Stabilised Construction Entrance Aggregate Specifications

Aggregate Range	50 – 150mm washed aggregate
Thickness	150mm minimum or 1.5 x aggregate size
Length	10m minimum length recommended
Width	4m minimum

Maintenance

Maintain the Stabilised Construction Entrance in a condition to prevent sediment from leaving the construction site. After each rainfall inspect any structure used to trap sediment from the Stabilised Construction Entrance and clean out as necessary.

When wheel washing is also required, ensure this is done on an area stabilised with aggregate which drains to an approved sediment retention facility.

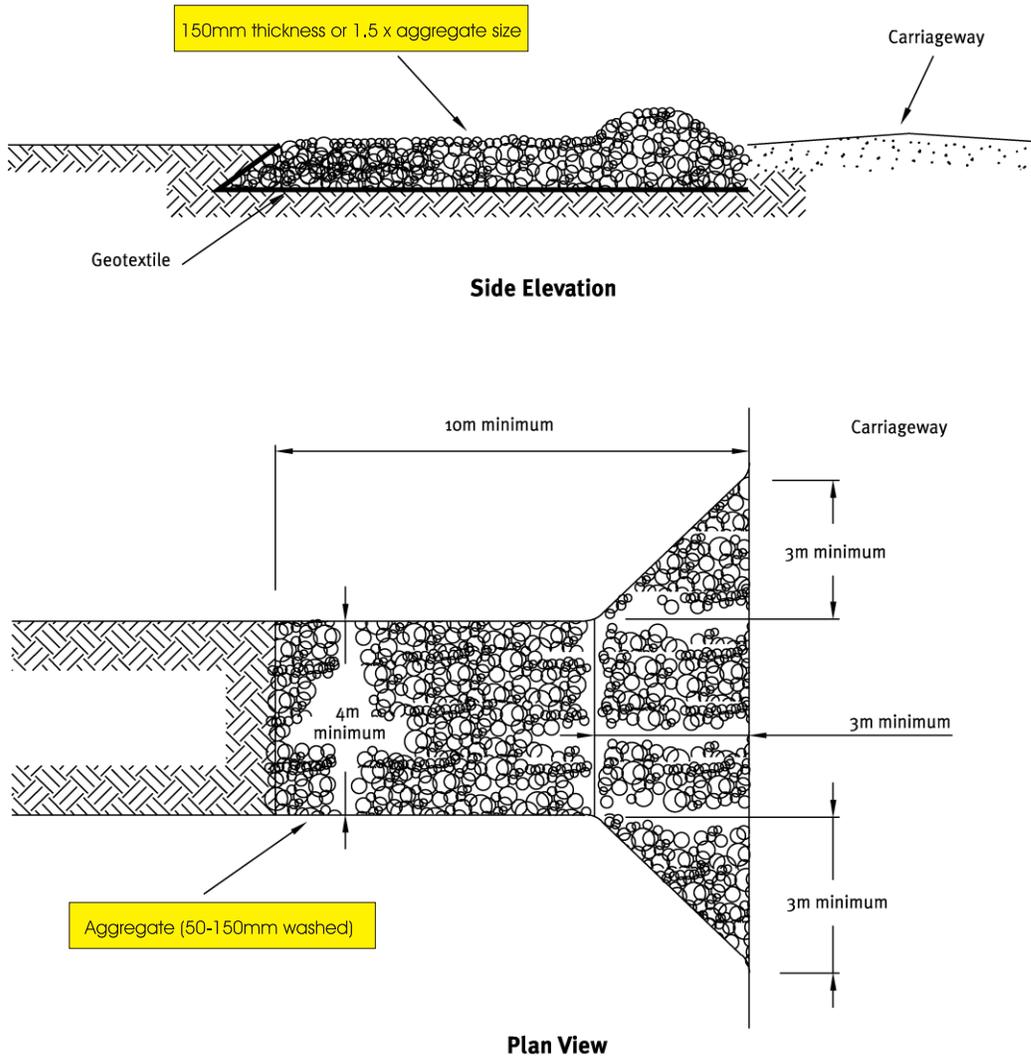


Figure 1.8 Stabilised Construction Entrance

Changes to Pages 12 - 14

Definition

A temporary barrier of woven geotextile fabric used to intercept runoff, reduce its velocity, **filter** and impound sediment laden runoff from small areas of disturbed soil.

Purpose

To detain flows from runoff so that deposition of transported sediment can occur through **settlement and filtering** through the fabric. Silt fences can only be used to intercept sheet flow. Do not use them as velocity checks in channels or place them where they will intercept concentrated flow.

Application

- On low gradient sites or for confined areas where the contributing catchment is small, such as short steep batter fills and around watercourses.
- To delineate the limit of disturbance on an earthworks site such as riparian areas or bush reserves.
- To store runoff behind the Silt Fence without damaging the fence or the submerged area behind the fence.
- Do not install Silt Fences across watercourses or in areas of concentrated flows.

Design

- Ensure Silt Fence height is a minimum of **600mm** above ground level.
- Place supporting posts/waratahs for Silt Fences no more than 2m apart unless additional support is provided by tensioned wire (2.5mm HT) along the top of the Silt Fence. Where a strong woven fabric is used in conjunction with a wire support, the distance between posts can be extended up to 4m. Double the Silt Fence fabric over and fasten to the wire and posts with wire ties, cloth fastening clips or **hog rings** at 150mm spacings. Ensure supporting posts/ waratahs are embedded a minimum of 400mm into the ground.
- Always install Silt Fences along the contour. Where this is not possible or where there are long sections of Silt Fence, install short Silt Fence returns projecting up slope from the Silt Fence to minimise concentration of flows. Silt Fence returns are a minimum 2m in length, can incorporate a tie back and are generally constructed by continuing the Silt Fence around the return and doubling back, eliminating joins.
- Join lengths of Silt Fence by doubling over fabric ends around a wooden post or batten or by stapling the fabric ends to a batten and butting the two battens together or by overlapping at least 2m as shown in Figure 2.2.

- Maximum slope lengths, spacing of returns and angles for Silt Fences are shown in Table 2.2.
- Install Silt Fence wings at either end of the Silt Fence projecting upslope to a sufficient height to prevent outflanking.
- Where impounded flow may overtop the Silt Fence, crossing natural depressions or low points, make provision for a riprap splash pad or other outlet protection device.

Table 2.2 Silt Fence Design Criteria

Slope Steepness %	Slope Length (m) (Maximum)	Spacing of Returns (m)
< 2%	N/A	Unlimited
2 – 10%	40	60
10 – 20%	30	50
20 – 33%	20	40
33 – 50%	15	30
> 50%	6	20

Construction Specifications


- Where water may pond behind the Silt Fence, provide extra support for the Silt Fence with tie backs from the Silt Fence to a central stable point on the upward side. Extra support can also be provided by stringing wire between support stakes and connecting the filter fabric to this wire.
- Excavate a trench a minimum of 200mm wide and 200mm deep along the proposed line of the Silt Fence. Install the support posts on the downslope edge of the trench and Silt Fence fabric on the upslope side of the support posts to the full depth of the trench, then backfill the trench with compacted soil.
- Use of Silt Fences in catchments of more than 0.5ha requires careful consideration of specific site measures, and other control measures may be better, such as a Super Silt Fence.
- Where water may pond behind the Silt Fence, provide extra support for the Silt Fence with tie backs from the Silt Fence to a central stable point on the upward side. Extra support can also be provided by stringing wire between support stakes and connecting the filter fabric to this wire.
- The fabric cloth must meet the following requirements for Geotextile fabric.
 - Grab Tensile Strength: >440N (ASTM D4632)
 - Tensile Modulus: 0.140 pa (minimum)
 - Apparent Opening Size 0.1 – 0.5mm (ASTM D4751)

- Use supporting posts of tanalised timber a minimum of 50mm square, or steel waratahs at least 1.5m in length.
- Reinforce the top & bottom of the Silt Fence fabric with a wire support made of galvanised wire of a minimum diameter of 2.5mm. Tension the wire using permanent wire strainers attached to angled waratahs at the end of the Silt Fence.
- Where ends of Silt Fence fabric come together, ensure they are overlapped, folded and stapled/screwed to prevent sediment bypass.

Maintenance



- Inspect Silt Fences at least once a week and after each rainfall. Make any necessary repairs when bulges occur or when sediment accumulation reaches 50% of the fabric height.
- Any areas of collapse, decomposition or ineffectiveness need to be immediately replaced.
- Remove sediment deposits as necessary to continue to allow for adequate sediment storage and reduce pressure on the Silt Fence. Ensure that the sediment is removed to a secure area.
- Do not remove Silt Fence materials and sediment deposition until the catchment area has been appropriately stabilised. Stabilise the area of the removed Silt Fence.

Standard detail
for Silt Fence

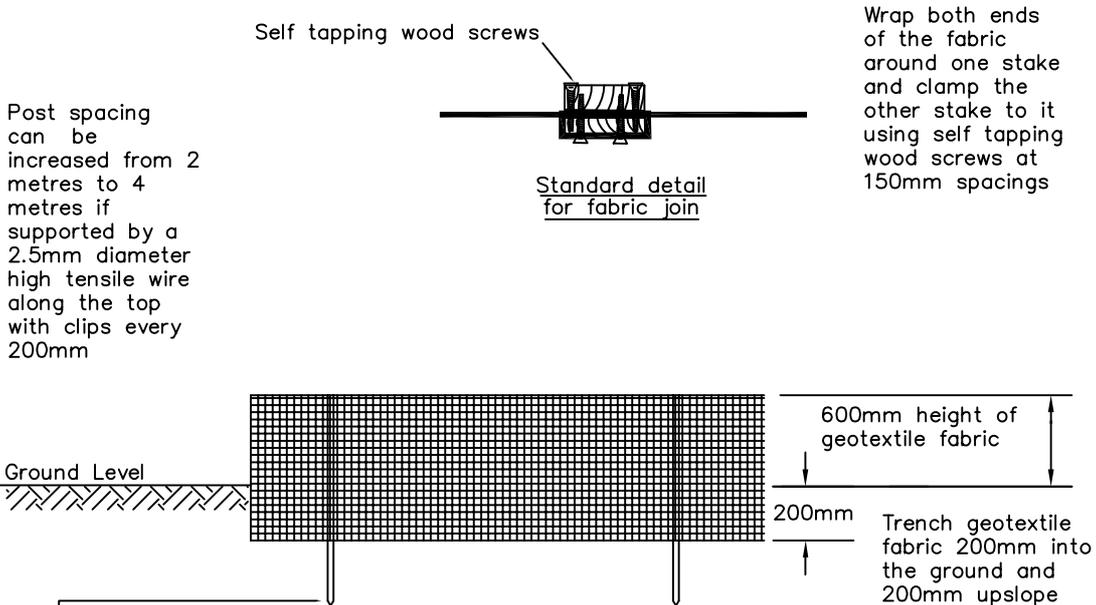

Post spacing can be increased from 2 metres to 4 metres if supported by a 2.5mm diameter high tensile wire along the top with clips every 200mm

Steel standards such as waratahs or standard wooden fenceposts (No.3 rounds minimum) driven a minimum of 400mm into the ground

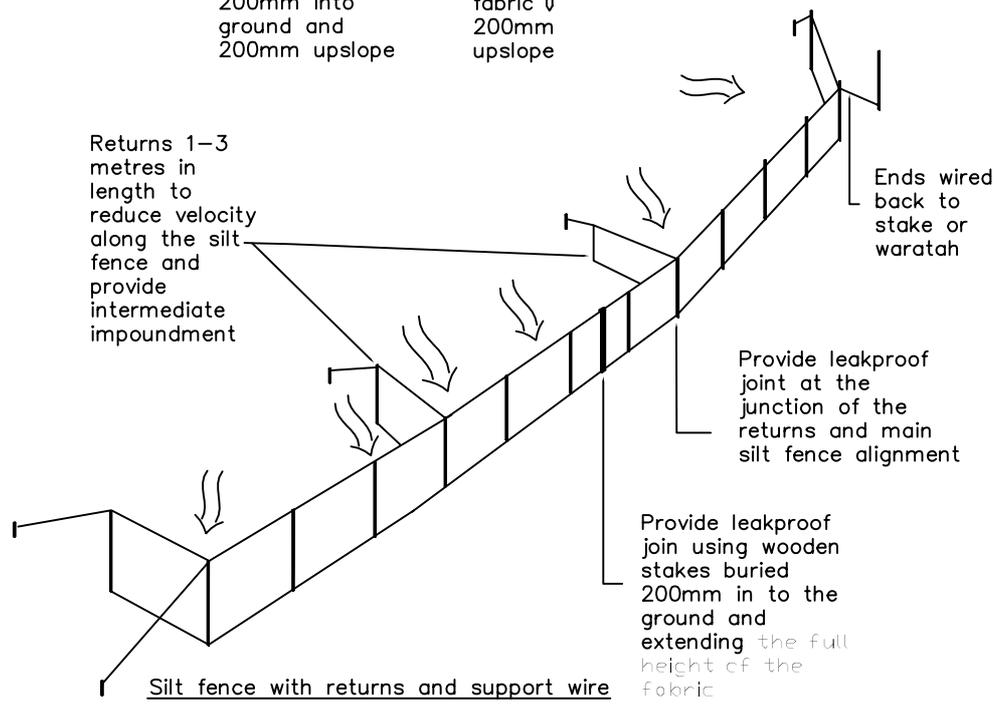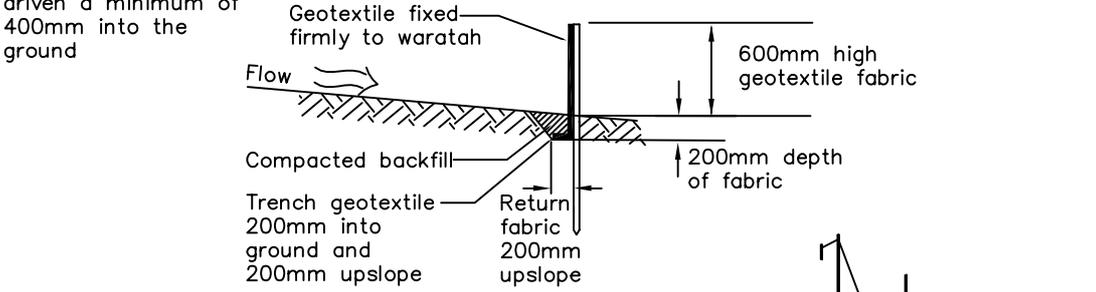

Changes to Pages 15 - 17

Definition

A temporary barrier of woven geotextile fabric over chain link fence that is used to intercept runoff, reduce their velocity, filter and impound sediment-laden runoff from small areas of disturbed soil.

Purpose

To reduce runoff velocity so that deposition of transported sediment can occur through settlement and filtering through the fabric.

A Super Silt Fence provides much more robust sediment control than a standard Silt Fence and allows up to four times the catchment area to be treated by an equivalent length of standard Silt Fence.

Application

- Provides a barrier that can collect and hold debris and soil, preventing the material from entering critical areas, watercourses and streets.
- Can be used where the installation of an Earth or Topsoil Bund would destroy sensitive areas such as bush and wetlands.
- Should be placed as close to the contour as possible. No section of the fence should exceed a grade of 5% for a distance of more than 15m.

Design

When considering Super Silt Fence installation for larger catchments (greater than 0.5ha) as in Table 2.3, carefully consider the specific site conditions and other alternative control measures available. Base the length of the Super Silt Fence on the limits shown in Table 2.3.

Limits imposed by ultraviolet light affect the stability of the fabric and will dictate the maximum period that the Super Silt Fence may be used.

Where ends of the geotextile fabric come together, overlap, fold and staple the fabric ends to prevent sediment bypass.

Table 2.3 Super Silt Fence Design Criteria

Slope Steepness %	Slope Length (m) (Maximum)	Spacing of Returns (m)
0 -10%	Unlimited	60
10 – 20%	60	50
20 – 33%	30	40
33 – 50%	30	30
> 50%	15	20



Construction Specifications

- Use a Silt Fence fabric that is appropriate to the site conditions and fits the manufacturer's specifications.
- Excavate a trench **200mm wide by 300mm deep** along the line of the Super Silt Fence.
- Position the posts (No. 3 rounds, No. 2 half rounds or waratahs) at no greater than 3m centres on the downslope side of the trench. While there is no need to set the posts in concrete, ensure the 1.8m long posts are driven to an appropriate depth (1metre minimum).
- Install tensioned galvanised wire (2.5 mmHT) at 400mm and again at 800mm above ground level using permanent wire strainers.
- Secure chain link fence to the fence posts with wire ties or staples, ensuring the chain link fence goes to the base of the trench.
- Fasten two layers of geotextile fabric securely to the Super Silt Fence with ties spaced every 600mm at the top and mid section of the Super Silt Fence.
- Place the two layers of geotextile fabric to the base of the trench (a minimum of **300mm** into the ground) and place compacted backfill back to the original ground level.
- **Embed geotextile support into the ground by 300mm upslope for 200mm.**
- When two sections of geotextile fabric adjoin each other, ensure they are doubled over a minimum of 300mm, wrapped around a batten and stapled at 75mm spacings to prevent sediment bypass.
- The geotextile fabric must meet the following requirements:
 - Grab Tensile Strength: >440N (ASTM D4632)**
 - Tensile Modulus: 0.140 pa (minimum)**
 - Apparent Opening Size 0.1 – 0.5mm (ASTM D4751)**

Maintenance

Inspect regularly and before and after storm events.

Undertake maintenance as needed and remove silt buildups when bulges develop in the Super Silt Fence or when sediment deposition reaches 50% of the Super Silt Fence height.

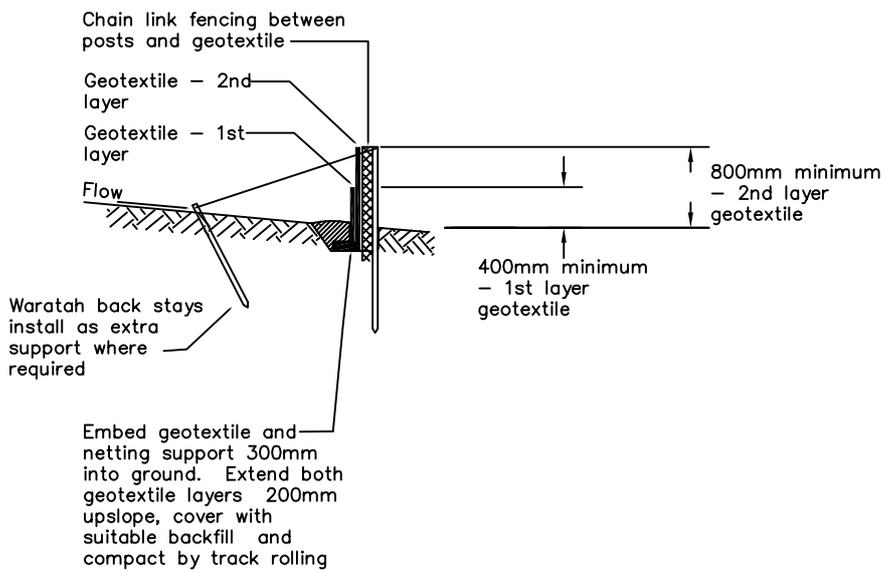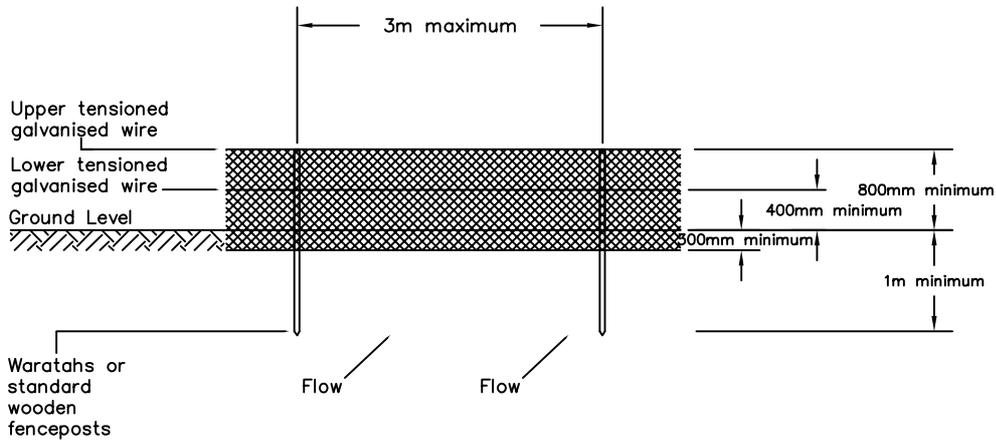

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Auckland Regional Council acknowledges the assistance of many earthwork consultants and contractors, specifically Babington and Associates during the development and compilation of these guidelines.

Special thanks also goes to Shelley Trueman and Clare Feeney for providing valuable advice and guidance.

Copyright 1999 © Auckland Regional Council

No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means electronic, mechanical, photocopying, recording or otherwise, without the prior permission of the publisher.

Printed on recycled paper.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

These Guidelines replace Auckland Regional Council Technical Publication Number 2 and are to be known as Technical Publication Number 90 *Erosion and Sediment Control Guidelines for Land Disturbing Activities in the Auckland Region*.

The intent of these Guidelines is as follows:

- To provide a comprehensive guideline for erosion and sediment control.
- To detail the rules of the *Proposed Regional Plan: Sediment Control*.
- To minimise adverse environmental effects of sediment discharge through appropriate use and design of specific measures.

These Guidelines outline the principles of erosion and sediment control including detailing the *Ten Commandments of Erosion and Sediment Control* in the Auckland Region.

The practices detailed in these Guidelines are divided into erosion control, sediment control, works within a watercourse, quarries and vegetation removal. For each practice these Guidelines outline the following:

- Definition
- Purpose
- Application
- Design/construction specifications
- Comments
- Maintenance

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

We will be regularly reviewing these Guidelines. Please help us keep them accurate and practical - let us know about any changes we need to make by using this form.

Please photocopy this form before you fill it out, to keep this original for future use.

1. Errors

Are there any errors in the text or diagrams? If so, please tell us:

- o which page and/or figure number it is on
- o what the error is and how you would correct it

2. Omissions

Have we left out any measures/practices commonly used or which you find useful? If so, please list them below and if possible, any design guidelines for us to include:

3. Effectiveness

Are these Guidelines helpful for complying with erosion and sediment control requirements. If not, please tell us how we can improve these Guidelines:

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

4. Other Comments

Do you have any other comments or questions? If so, please note them below:

5. Your contact details

(Optional) Please note your name and phone number below in case we need to discuss your suggestions in more detail:

Name: _____ Phone: _____

Thank you for taking the time to improve our Guidelines.

Feel free to phone us about your views on (09) 379 4420 (ask for the Sediment Management Team), or *Freepost* a copy of this response form to:

The Sediment Management Team, Auckland Regional Council, Private Bag 92012, Auckland. Freepost No. 4103.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

	page
Acknowledgements	ii
Executive Summary	iii
Response Form	iv
Table of Contents	vi
List of Plates	viii
List of Figures	ix
List of Tables	x
Part A – Principles	
1.0 Introduction	
1.1 Intent of these Guidelines	1
1.2 How these Guidelines Work	1
1.3 Erosion and Sediment Control in the Auckland Region	1
1.4 Current Legislation: When is a Resource Consent Required?	2
1.5 When is Erosion and Sediment Control Required?	2
1.6 Auckland's Clays: The Prime Importance of Erosion Control	3
2.0 Principles of Erosion and Sediment Control	
2.1 Types of Erosion	1
2.2 Factors Influencing the Erosion Process	3
3.0 The "Ten Commandments" of Erosion and Sediment Control	
4.0 Types of Land Disturbing Activities Undertaken in the Auckland Region	
Part B – Practices	
1.0 Erosion Control	
1.1 Runoff Diversion Channel/Bund	1
1.2 Contour Drain	3
1.3 Benched Slope	5
1.4 Rock Check Dam	7
1.5 Top Soiling	9

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

	page
Part B – Practices (Continued)	1.6 Revegetation Techniques 10
	1.6.1 Temporary and Permanent Seeding 10
	1.6.2 Hydroseeding 12
	1.6.3 Mulching 13
	1.6.4 Turfing 15
	1.7 Geosynthetic Erosion Control Systems (GECS) 17
	1.8 Stabilised Construction Entrance 20
	1.9 Pipe Drop Structure/Flume 22
	1.10 Level Spreader 25
	1.11 Surface Roughening 27
	2.0 Sediment Control
	2.1 Sediment Retention Pond 1
	2.2 Silt Fence 12
	2.3 Super Silt Fence 15
	2.4 Hay Bale Barrier 18
	2.5 Stormwater Inlet Protection 20
	2.6 Earth Bund 22
	2.7 Sump / Sediment Pit 24
	3.0 Works Within a Watercourse
	3.1 Temporary Watercourse Crossings 1
	3.2 Temporary Watercourse Diversion 3
	3.3 Rock Outlet Protection 6
	4.0 Quarries
5.0 Vegetation Removal	
Appendices	Appendix A Rules from Proposed Regional Plan: Sediment Control 1
	Appendix B Land Use Consent: Sediment Control 4
	Land Use Consent: Works Within a Watercourse 11
	Appendix C Standard Symbols for Erosion and Sediment Controls 18
Glossary/ Bibliography	Glossary 1
	Bibliography 8

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

	page
Part B – Practices	
1.0 Erosion Control	
Plate 1.1 Runoff Diversion Channel/Bund	1
Plate 1.2 Contour Drain	3
Plate 1.3 Benched Slope	5
Plate 1.4 Rock Check Dam	7
Plate 1.6.3.1 Mulching	13
Plate 1.6.3.2 Mulch Crimping	14
Plate 1.6.4 Turfing	15
Plate 1.8 Stabilised Construction Entrance	20
Plate 1.9 Pipe Drop Structure	22
Plate 1.11 Surface Roughening	27
2.0 Sediment Control	
Plate 2.1.1 Sediment Retention Pond Showing Decant Systems	1
Plate 2.1.2 Sediment Retention Pond Showing Baffle to Lengthen Flowpath and Create Correct Length: Width Ratio	5
Plate 2.2 Silt Fence	12
Plate 2.3 Super Silt Fence	15
Plate 2.4 Hay Bale Barrier	18
Plate 2.5 Stormwater Inlet Protection	20
Plate 2.6 Earth Bund	22
Plate 2.7 Sump / Sediment Pit	24
3.0 Works Within a Watercourse	
Plate 3.1 Temporary Watercourse Crossing	1
Plate 3.2 Temporary Watercourse Diversion	3
Plate 3.3 Rock Outlet Protection	6

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

		page
Part A – Principles	Figure 2.1 Types of Erosion Common in the Auckland Region	2
Part B – Practices	1.0 Erosion Control	
	Figure 1.1.1 Cleanwater Runoff Diversion Bund	2
	Figure 1.1.2 Runoff Diversion Channel	2
	Figure 1.2 Contour Drain	4
	Figure 1.3 Benched Slope	6
	Figure 1.4 Rock Check Dam	8
	Figure 1.7.1 Geotextile Laid on Slope	18
	Figure 1.7.2 Geotextile at Culvert Outlet	19
	Figure 1.8 Stabilised Construction Entrance	21
	Figure 1.9 Pipe Drop Structure	24
	Figure 1.10 Level Spreader	26
	Figure 1.11 Tracking	28
	2.0 Sediment Control	
	Figure 2.1.1 Sediment Retention Pond	2
	Figure 2.1.2 Sediment Retention Pond for Catchments up to 1.5 ha	8
	Figure 2.1.3 Sediment Retention Pond for Catchments Between 1.5 and 3 ha	9
	Figure 2.1.4 Sediment Retention Pond for Catchments Between 3 and 5 ha	10
	Figure 2.1.5 Sediment Retention Pond - Decant Detail	11
	Figure 2.2 Silt Fence	14
	Figure 2.3 Super Silt Fence	17
	Figure 2.4 Hay Bale Barrier	19
	Figure 2.5 Stormwater Inlet Protection - Filter Media Design	21
	Figure 2.6 Earth Bund	23
	Figure 2.7 Sump / Sediment Pit	25
	3.0 Works Within a Watercourse	
	Figure 3.2.1 Temporary Watercourse Diversion Works Sequence	4
	Figure 3.2.2 Temporary Watercourse Diversion Dam Detail	5

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

	page
Part B – Practices	
1.0 Erosion Control	
Table 1.2 Positioning of Contour Drains	3
Table 1.3 Benched Slope Design	5
Table 1.4 Rock Check Dam Design	8
Table 1.6 Grass Seed and Fertiliser Application Rates	11
Table 1.8 Stabilised Construction Entrance Aggregate Specifications	20
Table 1.9 Design Criteria for Pipe Drop Structure	22
Table 1.10 Level Spreader Design Criteria	25
2.0 Sediment Control	
Table 2.2 Silt Fence Design Criteria	13
Table 2.3 Super Silt Fence Design Criteria	16

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

1.1 Intent of These Guidelines

These Guidelines have three main objectives:

1. To provide users, ranging from those directly associated with various Land Disturbing Activities (Land Disturbing Activities) to interest groups, with a series of comprehensive guidelines for erosion and sediment control for land disturbing activities by:
 - o outlining the principles of erosion and sediment control and the sediment transfer process; and
 - o providing a range of erosion and sediment control practices that can be implemented on various Land Disturbing Activities.
2. To detail the rules in the Auckland Regional Council's *Proposed Regional Plan: Sediment Control* (September 1995) which define when a Land Use Consent is required.
3. To minimise adverse environmental effects of Land Disturbing Activities through appropriate use and design of erosion and sediment control techniques.

1.2 How These Guidelines Work

These Guidelines replace Technical Publication No. 2 *Erosion and Sediment Control Guidelines for Earthworks*, updated March 1995. They overview the erosion and sediment controls that can be used when undertaking various Land Disturbing Activities and are known as Technical Publication No. 90 *Erosion and Sediment Control Guidelines for Land Disturbing Activities in the Auckland Region*.

These Guidelines focus on the principles and practices of erosion and sediment control recommended for various Land Disturbing Activities. While not providing the full details of the Land Use Consent application process, they refer to the process and it is anticipated that they will form an integral part of the consent process. The Guidelines should be used during the development of an Erosion and Sediment Control Plan for a project, and must also be used as part of operating under the conditions of an approved consent.

These Guidelines are split into two main sections, Principles and Practices. The Principles section outlines ten critical elements that need to be considered when developing an Erosion and Sediment Control Plan for

any Land Disturbing Activity. These ten elements are referred to as the *Ten Commandments of Erosion and Sediment Control*.

The Practices section covers on-site practices to be used when implementing the *Ten Commandments*. In most circumstances, a range of practices will need to be used on any Land Disturbing Activity within the Auckland Region.

Standard symbols for erosion and sediment controls are used in Part B.

Auckland Regional Council staff are available for further advice and can be contacted at Auckland Regional Council, Private Bag 92 012, Auckland or by telephoning (09) 379 4420.

1.3 Erosion and Sediment Control in the Auckland Region

Hundreds of hectares of land are stripped of vegetation or laid bare each year around Auckland for the construction of subdivisions, roads, landfills and other developments. Without protection measures, the transformation of this land can result in accelerated on-site erosion and greatly increased sedimentation of waterways, estuaries and harbours.

Significant quantities of sediment are discharged from bare earth surfaces where appropriate erosion and sediment control measures are not implemented.

Various studies in Auckland indicate there is a 10 to 100 times increase in sediment yield from construction sites compared with pastoral land, while data from the United States suggests that there may be up to 1000 times the sediment yield from disturbed sites during construction compared with permanent forest cover.

In the 1996 – 97 earthworks season, 1000 ha of bare land was worked around the Auckland region. If left unprotected this could have resulted in a discharge of up to 66,000 tonnes of sediment/year to aquatic receiving environments.

The adverse ecological effects caused by sediment in waterways include:

- o Modified or destroyed instream values.
- o Modified estuarine and coastal habitats.
- o Smothering and abrading of fauna and flora.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

- o Changes in food sources and interruption of life cycles.

There is often a total change to instream communities. Recovery times from the impacts of sediment deposition are more likely to be measured in years rather than months.

In addition to ecological changes, there may be damage to water pumps and other structures; the quality of water supplies usually diminishes; localised flooding can occur and there is a loss of aesthetic appeal.

The Resource Management Act 1991 (RMA) establishes the Auckland Regional Council's statutory responsibilities for resource management. The purpose of the RMA is to promote the sustainable management of natural and physical resources. 'Sustainable management' is defined in Section 5 of the Act as:

'managing the use, development and protection of natural and physical resources in a way or at a rate, which enables people and communities to provide for their social, economic, and cultural wellbeing and for their health and safety while:

- '(a) sustaining the potential of natural and physical resources (excluding minerals) to meet the reasonably foreseeable needs of future generations; and
- '(b) safeguarding the life supporting capacity of air, water, soil and ecosystems; and
- '(c) avoiding, remedying or mitigating any adverse effects of activities on the environment.'

Historically, earthworks controls were based on voluntary controls initiated in the 1970s by the former Auckland Regional Water Board, which implemented guidelines and a complaints response role. The 1980s saw the introduction of Section 34 notices under the Soil Conservation and River Control Amendment Act 1959, requiring consents be obtained from the Regional Water Board prior to undertaking earthworks. This remained in effect until 30 September 1993 as part of Auckland Regional Council's Transitional Regional Plan. A Soil Conservation Consent for earthworks was then required under the Auckland Regional Council's *Erosion and*

Sediment Control Proposed Regional Plan. As a result of further submissions and subsequent hearings this has been replaced by the current *Proposed Regional Plan: Sediment Control* (September 1995), developed under the RMA, requiring a Land Use Consent: Sediment Control to be obtained prior to undertaking a range of Land Disturbing Activities.

1.4 Current Legislation: When is a Resource Consent Required?

The legal basis for requiring a Land Use Consent for Land Disturbing Activities is the *Proposed Regional Plan: Sediment Control* (September 1995). The Plan's rules apply to Land Disturbing Activities including earthworks, vegetation removal, roading, tracking, trenching and quarries. A copy of these rules can be found in Appendix A of these Guidelines. Consent application forms are provided in Appendix B.

It is important to note that the rules are valid at the time of publishing these Guidelines but are subject to change. Contact the Auckland Regional Council to confirm the status of the rules contained within these Guidelines before making a decision based upon them.

1.5 When is Erosion and Sediment Control Required?

All projects involving Land Disturbing Activities in the Auckland Region must incorporate erosion and sediment controls as an integral part of development. Projects which do not require a Land use Consent under the *Proposed Regional Plan: Sediment Control*, and are classified as permitted activities, MUST still implement appropriate erosion and sediment controls as detailed in these Guidelines.

On all projects, erosion and sediment controls should be in place before earthworks commence and should be removed only after the site has been fully stabilised to protect it from erosion. The principles and practices within these Guidelines should be referred to, and the Erosion and Sediment Control staff at the Auckland Regional Council contacted for further advice if required.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Works Within a Watercourse

Any works within a watercourse must be carefully planned because controlling sediment generation from these activities is difficult. These Guidelines include a number of erosion and sediment control measures that can be used for realignment, piping, culverting and stabilisation works.

The two most critical factors in minimising the impact of works of this nature are timing and duration of works.

Techniques for minimising sediment generation and discharge when undertaking works within a watercourse are outlined in Part B, Section 3 of these Guidelines.

It should be noted that further consents may be required when undertaking such works, and contact should be made with Auckland Regional Council staff to discuss the specific details of the proposed activity.

Cleanfills

Cleanfills are another Land Disturbing Activity that, while not directly referenced within the *Proposed Regional Plan: Sediment Control*, do generate sediment. These Guidelines do not include a specific section on cleanfill operations, but standard earthworks erosion and sediment control practices are appropriate for cleanfill operations. The ARC's definition of cleanfill (below) should be noted whenever cleanfill operations are to be undertaken:

- o That cleanfill material is defined as a filling operation disposing of soil (other than contaminated soil) rock, asphalt, fibrolite, plaster/clay products, and glass, and concrete with a maximum of 5% by volume per 10 truckloads of attached structural building materials (wood and structural steel excluding corrugated iron).
- o Cleanfilling operations are permitted to accept only those materials outlined above. These operations are not for the disposal of organic material, vegetation, contaminated soils or other waste materials. Additionally cleanfilling operations are not for the disposal of unattached structural building materials.

- o Should non-cleanfill material be disposed to a cleanfill site the site may be required to obtain authorisation for any discharge of contaminants (other than sediment) under section 15 of the Resource Management Act 1991, or remove non-cleanfill material from the site, whether or not this material is part of the existing fill matrix.

1.6 Auckland's Clays: The Prime Importance of Erosion Control

The small size of soil particles typical of Auckland's geology reduces the effectiveness of erosion and sediment controls. The fine clays, once mobilised, take a much longer time to settle than the coarser sand and silt material.

Bigger, better or more numerous sediment control measures may therefore not be very effective in limiting off-site transfer of sediments.

Most effort should be put into preventing sediment generation in the first instance. That is, into erosion control rather than sediment control. Erosion control techniques include the following:

- o Revegetation
- o Minimisation of earthworks
- o Timing
- o Staging of earthworks operations

Other measures such as the use of chemical treatment of runoff may also be necessary in some circumstances.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

2.1 Types of Erosion

Erosion is the process whereby the land surface is worn away by the action of water, wind, ice or other geological processes. The resultant displaced material is known as sediment. Sedimentation is the deposition of this eroded material. Accelerated erosion, caused primarily by human development activities, is generally much more rapid than natural erosion.

The basic erosion process is detachment, transport and deposition (sedimentation). In Auckland, water is the usual eroding agent and transport medium, through raindrop impact and overland flow energy. Water dislodges exposed soil particles and transports them downslope. Runoff and streamflow transport the eroded soil particles to the final receiving environment where sedimentation occurs.

There are seven main types of erosion associated with land disturbing activities.

- Splash erosion
- Sheet erosion
- Rill erosion
- Gully erosion
- Tunnel erosion
- Channel erosion
- Mass movement

These are outlined below.

Splash Erosion

- Soil erosion is a mechanical process that requires energy. Much of this energy is supplied by falling rain drops.
- The impact of a single raindrop on a soil surface or on a thin film of water may break up the soil aggregates and cause individual particles to be thrown into the air. If this occurs on a slope then some particles will move up-slope, but the net effect due to gravity will cause splashed particles to move downslope. Splash erosion is directly related to the size, distribution, shape, velocity and direction of the raindrop.
- In Auckland, the erosive ability of splash erosion is enhanced by the typically intense cyclonic storms that can occur during the earthworks season.

Sheet Erosion

- When rainfall intensity exceeds the infiltration rate of a soil and the capacity of the available surface detention, excess water moves downslope, transporting soil particles detached by splash erosion.
- Sheet erosion or wash erosion is the uniform removal of soil in thin layers by the forces of raindrops and overland flow. It can be a very significant erosive process because it can cover large areas of sloping land and may go unnoticed for some time. Sheet erosion can be recognised by soil deposition at the bottom of a slope, or by the appearance of light coloured subsoil material on the surface. If left unattended, sheet erosion of topsoils will gradually remove the nutrients and organic matter important to revegetation, and will eventually result in loss of soil productivity on contributing slopes and elevated sediment concentrations in receiving waters.

Rill Erosion

- Rill erosion is the removal of soil by runoff moving in concentrated flows. As the flow changes from sheet flow to deeper flow in these channels, or rills, the velocity and turbulence of the flow increases, and the energy of this flow is able to both detach and transport soil particles.
- Rill erosion has been estimated to be the dominant contributor to erosion on hill slopes.

Gully Erosion

Gully erosion is the removal of soil by running water resulting in the formation of channels greater than 300 mm deep. Gullies can be distinguished from rills when normal agricultural tillage operations cannot obliterate them.

The following are the processes which act in the formation of gullies in Auckland.

- Waterfall erosion at the head of the gully
- Channel erosion
- Raindrop splash
- Diffuse flow from the side of the gully or from seepage
- Slides or mass movement of soil within the gully.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

A gully may develop and grow rapidly and their formation may generate a considerable amount of erosion. Therefore, their prevention and remediation is vital for erosion control.

Tunnel Erosion

Tunnel erosion, or piping, is the removal of subsurface soil by subsurface water while the surface soil remains relatively intact. This produces long cavities beneath the ground surface, which may enlarge until the soil surface is no longer supported, at which point the surface may collapse forming a circular hole, sometimes referred to as a 'tomo'. Such erosion tunnels may range in size from a few centimetres to several metres in diameter and typically form a series along the surface above a tunnel.

Channel Erosion

The erosion of ephemeral or perennial channels results from direct action of concentrated flow when the velocity or volume of flow in a stream increases. Natural channels adjust over time to the volume and velocity of runoff that normally occurs in the catchment. Channel erosion occurs by scouring or undercutting of the stream bank below the water surface and generally happens during medium to high flows.

Channel erosion is a major contributor to sedimentation in the Auckland metropolitan area. High flows in stream channels occur more frequently once a catchment has been urbanised, eroding stream banks and enlarging the channel. For example, an Auckland study showed a three-fold channel widening after 85% of the catchment had been urbanised (Herald, 1989).

Mass Movement

Mass movement is the erosion of soil or rock by gravity-induced collapse. It is usually triggered by groundwater pressure after heavy rain, but can also have other causes, notably streams undercutting the base of a slope or earthworks. Movement can be either rapid and near instantaneous (landslides, avalanches, debris flows), or slow and intermittent (earthflows and slumps). Earth and soil slip movement are also often noted after the removal of vegetation from critical slopes associated with Land Disturbing Activities. These slopes need to be identified before development starts and should be avoided wherever practicable.

Mass movement can cause major problems on earthworks sites and geotechnical investigations should be undertaken where possible to avoid critical slopes or allow for the prevention of such erosion.

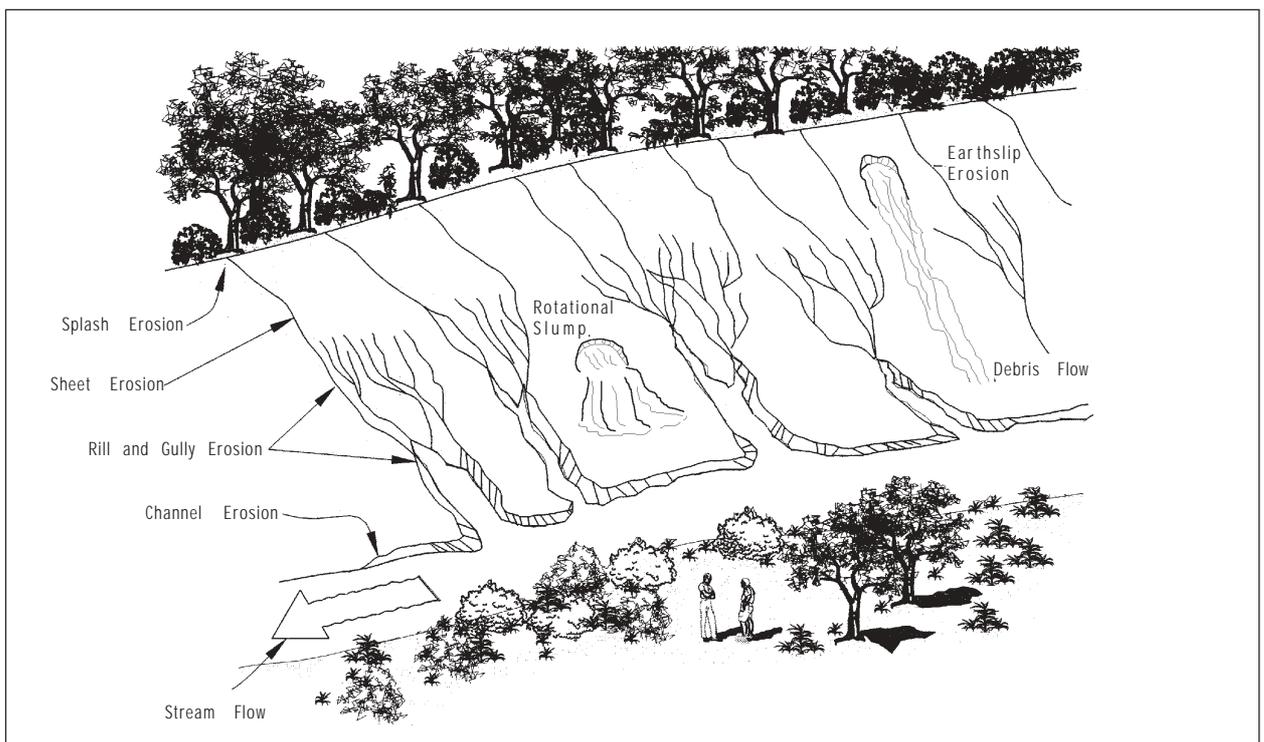


Figure 2.1 Types of Erosion Common in the Auckland Region

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

2.2 Factors Influencing the Erosion Process

The main factors influencing soil erosion are climate, soil characteristics, topography, ground cover and evapotranspiration.

Climate

Climate affects erosion potential both directly and indirectly. The direct relationship arises from the action of rain - a driving force of erosion - where raindrops dislodge soil particles and runoff carries them away. The annual pattern of rainfall and temperature change, by and large, determines the extent and growth rate of vegetation. This is critical, because vegetation is currently the most important form of erosion control used on Land Disturbing Activities in Auckland.

The Auckland Region receives about 1200 mm of rainfall annually, with average monthly rainfalls being greatest throughout the winter period. Summer has the greatest rainfall variability, some summers being very dry, others wet.

Intense cyclonic storms during summer also create many erosion problems, with a large amount of rain falling within a short time period. Erosion and sediment control for all Land Disturbing Activities must be planned accordingly.

Soil Characteristics

Four soil characteristics are important in determining soil erodibility:

- *Soil texture* refers to the particle sizes making up a particular soil and their relative proportions. Sand, silt and clay are the three major soil particle classes. Auckland soils tend to have a high content of fine sands and silts, which are the more erodible fractions of the soil. The clay content also creates difficulty as once mobilised, it is very difficult to settle out. This is due to the small nature of individual particles and the tendency for clay particles to repel each other, thus keeping them in suspension.
- *Organic matter* improves soil structure and increases permeability, water holding capacity and soil fertility.
- *Soil permeability* refers to the ability of the soil to allow air and water to move through the soil. Soils with a higher permeability produce less runoff at a

lower rate than soils with low permeability. Engineered fills have a very low permeability, resulting in increased levels of potentially erosive runoff.

- *Soil structure* is the degree that soil particles are arranged into aggregates. A granular structure is the most desirable in both agricultural and erosion control terms. When the soil surface is compacted or crusted, water tends to run off rather than infiltrate. Erosion potential increases with increased runoff.

Topography

Slope length and slope angle are critical factors in erosion potential because they play a large part in determining the velocity of runoff. Long continuous slopes allow runoff to build up velocity and to concentrate flow. This produces rill and gully erosion.

The shape of a slope also has a major bearing on erosion potential. The base of a slope is more susceptible to erosion than the top because runoff arriving there is moving faster and is more concentrated. However, deposition may occur at the base of concave slopes where slope angle diminishes.

Ground Cover

Ground cover includes vegetation and surface treatment such as mulches and geotextiles. Vegetation is without question the most effective long term form of erosion control for protecting surfaces that have been disturbed. Vegetation shields the soil surface from the impact of falling rain, slows the velocity of runoff, holds soil particles in place and maintains the soil's capacity to absorb water.

Evapotranspiration

The Auckland Region has a fairly frequent rainfall during the winter, but due to high evapotranspiration and a minimum of rainfall in the summer period, soil moisture levels are often so low that irrigation or watering is needed to achieve the moisture levels needed for plant growth. Evapotranspiration rates and the number of days of soil moisture deficit vary across the region. Careful consideration needs to be given to evapotranspiration when attempting to establish a vegetative cover and prevent erosion.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

These “Ten Commandments,” summarise the ten principles to follow when preparing an Erosion and Sediment Control Plan.

1. Minimise Disturbance

Fit land development to land sensitivity.

Some parts of a site should never be worked and others need very careful working. Watch out for and avoid areas that are wet (streams, wetlands, springs), have steep or fragile soils or are conservation sites or features.

Bear in mind the *minimum earthworks strategy (low impact design)* – ideally, only clear areas required for structures or access.

Show all Limits of Disturbance on the Erosion and Sediment Control Plan (E&SCP). On site, clearly show Limits of Disturbance using fences, signs and flags.

2. Stage Construction

Carrying out bulk earthworks over the whole site maximises the time and area that soil is exposed and prone to erosion. “Construction staging”, where the site has earthworks undertaken in small units over time with progressive revegetation, limits erosion.

Careful planning is needed. Temporary stockpiles, access and utility service installation all need to be planned. Construction staging differs from sequencing. Sequencing sets out the order of construction to contractors.

Detail both construction staging and sequencing in the E&SCP.

3. Protect Steep Slopes

Existing steep slopes should be avoided. If clearing is absolutely necessary, runoff from above the site can be diverted away from the exposed slope to minimise erosion. If steep slopes are worked and need stabilisation, traditional vegetative covers like topsoiling and seeding may not be enough – special protection is often needed.

Highlight steep areas on the E&SCP showing Limits of Disturbance and any works and areas for special protection.

4. Protect Watercourses

Existing streams, watercourses and proposed drainage patterns need to be mapped. Clearing is not permitted adjacent to a watercourse unless the works have been approved by the Auckland Regional Council. Where undertaken, work that crosses or disturbs the watercourse

Map all watercourses and show Limits of Disturbance and protection measures; show all practices to be used to protect new drainage channels; and indicate crossings or disturbances and associated construction methods in the E&SCP.

5. Stabilise Exposed Areas Rapidly

The ultimate objective is to fully stabilise disturbed soils with vegetation after each stage and at specific milestones within stages. Methods are site specific and can range from conventional sowing through to straw mulching. Mulching is the most effective instant protection.

Clearly define time limits for grass or mulch covers, outline grass rates and species and define conditions for temporary cover in the case of severe erosion or poor germination in the E&SCP.

6. Install Perimeter Controls

Perimeter controls above the site keep clean runoff out of the worked area – a critical factor for effective erosion control. Perimeter controls can also retain or direct sediment laden runoff within the site. Common perimeter controls are diversion drains, silt fences and earth bunds.

Detail the type and extent of perimeter controls in the E&SCP along with design parameters.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

7. Employ Detention Devices

Even with the best erosion and sediment practices, earthworks will discharge sediment laden runoff during storms. Along with erosion control measures, sediment retention structures are needed to capture runoff so sediment generated can settle out. The fine grained nature of Auckland soils means sediment retention ponds are often not highly effective. Ensure the other control measures used are appropriate for the project and adequately protect the receiving environment.

Include sediment retention structure design specifications; detailed inspection and maintenance schedules of structures and conversion plans for permanent structures, in the E&SCP.

8. Get Registered

A trained and experienced contractor is an important element of an E&SCP. These people are responsible for installing and maintaining erosion and sediment control practices. On-site staff certified through the Auckland Regional Council Industry Education Programme can save project time and money, by identifying threatened areas early on and putting into place correct practices.

Contact Auckland Regional Council about registration. Include arrangements for a pre-construction meeting, regular inspection visits (including a pre-wintering meeting), and final inspection.

9. Make Sure the Plan Evolves

An effective E&SCP is modified as the project progresses from bulk earthworks to developed individual lots. Factors such as weather, changes to grade and altered drainage can all mean changes to planned erosion and sediment control practices.

Update the E&SCP to suit site adjustments in time for the pre-construction meeting and initial inspection of installed erosion and sediment controls, and make sure it is regularly referred to and available on site.

10. Assess and Adjust

Inspect, Monitor and Maintain Control Measures

Assessment of controls is especially important following a storm. A large or intense storm will leave erosion and sediment controls in need of repair, reinforcement or cleaning out. Repairing without delay reduces further soil loss and environmental damage.

Assessment and adjustment is an important erosion and sediment control practice – make sure it figures prominently in the E&SCP.

Assign responsibility for implementing the E&SCP and monitoring control measures as the project progresses.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

The following are the main types of Land Disturbing Activities undertaken in the Auckland Region and these are discussed in these Guidelines.

- o Trenching
- o Watercourse works
- o Cleanfills
- o Small sites and permitted activities
- o Earthworks
- o Roothing
- o Quarries and vegetation removal

The following is a brief summary of key considerations for minimising adverse environmental effects of these activities that are not found in the detailed description of erosion and sediment control measures in Part B.

Trenching

Trenching, usually for installing utility services, often happens towards the end of the bulk earthworks phase of a project. The following points need to be considered when trenching.

- o The project needs to be undertaken in appropriately sized stages such that the area exposed can be fully stabilised within an acceptable time frame.
- o If trenching impacts on existing erosion and sediment control measures that are part of the overall development, those measures should be reinstated as soon as possible. Contingency measures should be put in place until the original measures are reinstated or replaced.
- o All trenching operators working within a larger site must be familiar with the overall Erosion and Sediment Control Plan for the site and must comply with this approved plan.
- o Independent erosion and sediment control measures detailed in these Guidelines should be employed for the trenching operation.
- o Topsoil and subsoils should be stockpiled separately adjacent to the trench so that at the completion of the operation, these soils can be replaced in the appropriate order and vegetation established.
- o When trenching through overland flow paths, give special consideration to the diversion of any flows, which may occur during trenching, as well as

reinstating and stabilising the overland flow path.

Works Within a Watercourse

Works within a watercourse should be avoided wherever possible, with all alternatives considered beforehand. Where watercourse works are unavoidable, they will create sedimentation downstream, so the following points should be carefully considered when undertaking these works.

- o Have all alternatives been considered?
- o Install a stabilised diversion so that works can be undertaken in the dry and reinstate the streamflow only after these areas have been appropriately stabilised. If a diversion is not a viable option, then ensure the alternative options are fully considered.
- o Carry out works during a dry time of the year when stream flows are low and the likelihood of a storm is low.
- o Keep the duration of works short.
- o Identify instream values so as to avoid critical periods such as fish spawning periods.
- o Consider the direct short and long term impacts of culverts or instream structures and install appropriately designed fish-pass provisions.
- o Be sure to inform all downstream users, for example water-users, of potential downstream sediment discharges.

Cleanfills

Cleanfills dispose of unwanted fill material which may contain some other material as in the definition of cleanfill provided in Part A of these Guidelines.

Land Disturbing Activities associated with cleanfills range from haul roads and access areas to tip faces and dumping areas. Several controls are needed for adequate erosion and sediment control on such sites and the following points should be carefully considered when undertaking such operations:

- o The cleanfill operator needs to ensure that material being accepted for the cleanfill fits within the ARC's definition. In cases where it doesn't, the operator must reject such loads, which will then need to be transported to an approved landfill.
- o Erosion and sediment controls should be installed

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

in accordance with these Guidelines and appropriate maintenance undertaken.

- o As a cleanfill operation is considered to be a land disturbing activity, each operation should be assessed for any necessary consents within the *Proposed Regional Plan: Sediment Control*.
- o Staging of cleanfill operations is critical and a programme of progressive stabilisation of all cleanfill sites should be part of each operation.

Small Sites and Permitted Activities

After the bulk earthwork phase of an earthworks operation, individual developers start house construction. This is the phase of small site developments which is considered permitted activities under the *Proposed Regional Plan: Sediment Control*. The cumulative impact from small sites is considered to be considerable and in some areas may cumulatively discharge as much sediment as the initial development itself. Often at this stage of the proposal, stormwater systems are in place and there are no, or minimal, erosion and sediment controls on the site. This results in sediment discharging through an efficient conveyance system (the stormwater system) directly to the receiving environment.

The following points need to be considered when undertaking small site development:

- o The developer should be fully aware of the permitted activity thresholds within the *Proposed Regional Plan: Sediment Control* and the conditions it specifies.
- o Erosion and sediment controls should be installed either on an individual site-by-site basis or a combination of the sites, in accordance with these Guidelines or the *Small Site Guidelines for Earthworks in the Auckland Region*.
- o Stormwater runoff from small sites needs careful planning in terms of the location of roof downpipes so that runoff across bare sites does not scour soils.
- o Areas of exposed soils should be stabilised upon completion of earthworks, including topsoil and subsoil stockpiles, lawn areas and accessways.
- o The site should be isolated from the subdivision's road system using silt fences to intercept flow from

the site, with a Stabilised Construction Entrance (see Part B, Section 1.8) of to provide site entry and exit.

Earthworks

Earthworks include a wide range of activities from cleanfilling operations (defined above) through to earthworks associated with industrial, commercial and residential developments. The *Proposed Regional Plan: Sediment Control* defines the thresholds for resource consent requirements for earthworking activities. Earthworks have a major potential to generate large amounts of sediment, and if not controlled appropriately, can lead to large sediment discharges. Planning of these developments is critical to ensure that the activity is undertaken appropriately, and in a controlled manner to avoid unnecessary impacts on receiving environments. The "Ten Commandments" outline the critical features of an earthworks operation. The following are further key points contractors need to be aware of when undertaking earthworks operations.

- o It is important to comply with the specific requirements of the resource consent when undertaking earthworks operations.
- o Emphasis should be placed on erosion control, rather than sediment control, because preventing sediment generation is the best means of preventing sediment discharge from earthworks sites.
- o Always produce an Erosion and Sediment Control Plan (E&SCP) for an earthworks operation. Be sure that all parties involved with the operation, including subcontractors, are familiar with and have access to a current copy of this Plan.
- o Always update the E&SCP with major variations on the site and be sure these variations have the appropriate approvals. Keep this up-to-date version in the site office at all times.
- o Plan ahead and undertake consultation with necessary parties as required. Get approvals and start the operation early to avoid last minute delays and the need to keep working into the undesirable wetter months.
- o Install appropriate controls in accordance with the approved E&SCP and be sure that the design specifications are appropriate for the operation.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

- Install subsurface drainage as required (to an agreed methodology) to divert subsurface cleanwater past control structures and areas of disturbance as appropriate.

Roading

Like trenching, the linear nature of roading poses challenges for erosion and sediment control. Measures need to be carefully planned to ensure controls are successful. Often the operation can be undertaken sequentially, stabilising worked areas as they are completed. This minimises the total sediment generating area of the proposal and helps prevent unnecessary road maintenance.

The following are some key points to consider when working through a roading proposal.

- Provide enough room for effective erosion and sediment control measures. Often the road corridor itself can involve the whole designation area and no room remains for such controls. Where space is a constraint, make sure that the erosion and sediment controls are approved and will give the necessary protection to downstream receiving environments.

- Incorporate stormwater design into the E&SCP. This removes the need to revisit the area to install stormwater systems and the unnecessary extra earthworks that their construction would require.
- Keep the areas of road corridor exposed at any one time to a limit that can be practically stabilised with hardfill or by vegetative means, to minimise the exposed area at risk.
- When crossing watercourses, look for alternative routes and alternative designs and implement the option which provides the best environmental alternative.
- Control all upslope catchment runoff, diverting clean water around or safely through the area of disturbance.

Quarries and Vegetation Removal

Measures in these Guidelines are suitable for quarry and vegetation removal operations. However, the long term nature of many quarries and the clearfelling of whole catchments during vegetation removal operations mean that some special erosion and sediment control measures need to be implemented. Careful planning of such operations is thus critical. The key areas where attention is required are discussed in detail in Part B of these Guidelines and should be read in conjunction with the other erosion and sediment controls also detailed.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Erosion and Sediment Control Practices

Part B outlines minimum criteria for the design, construction and implementation of a range of erosion and sediment control measures commonly used on earthworks sites and on other Land Disturbing Activities. These measures form one aspect of erosion and sediment control on any site, and should always be used in conjunction with the measures outlined in the *Ten Commandments of Erosion and Sediment Control* in Part A of these Guidelines.

The most effective form of erosion control is to minimise the area of disturbance, retaining as much existing vegetation as possible. This is especially important on steep slopes or in the vicinity of watercourses, where no single measure will adequately control the erosion and transport of sediment, and where receiving environments may be highly sensitive.

The criteria outlined are the minimum standard for each measure. Each Land Disturbing Activity must be assessed on an individual basis, and in many cases higher standards may be required.

For every practice, these Guidelines outline the following.

- Definition
- Purpose
- Application
- Design/Construction Specifications
- Comments
- Maintenance

Symbols shown alongside controls are listed in Appendix C.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

1.1 Runoff Diversion Channel/Bund

R — R —



Plate 1.1 Runoff Diversion Channel/Bund

Definition

A non erodible channel or bund for the conveyance of runoff constructed to a site-specific cross section and grade design.

Purpose

To either protect work areas from upslope runoff (clean water diversion), or to divert sediment laden water to an appropriate sediment retention structure.

Application

Runoff Diversion Channels/Bunds are used in the following situations.

- To divert clean upslope water away from areas to be worked (clean water diversion).
- To divert sediment-laden runoff from disturbed areas into sediment treatment facilities.
- At or near the perimeter of the construction area to keep sediment from leaving the site.
- In either temporary or permanent situations.

- Keep permanent diversions in place until the disturbed area is permanently stabilised against erosion.
- Stabilise Runoff Diversion Channels/Bunds (where necessary) before use.

Design

There are many designs for Runoff Diversion Channels/Bunds. The following outlines design criteria requirements.

- Design the Runoff Diversion Channel to carry the flow from the 5% AEP rainfall event (plus freeboard).
- Restrict use to grades to no more than 2% unless armoured.
- Construct with a trapezoidal cross sectional shape with internal side slopes no steeper than 3:1, and external slopes no steeper than 2:1.
- Construct Runoff Diversion Bunds with side slopes no steeper than 3:1.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

- o Survey all gradients on the site.
- o Ensure earth embankments used to construct Runoff Diversion Channels/Bunds are adequately compacted.
- o Flow velocities greater than 1 o/s will cause the Runoff Diversion Channel/Bund to erode. Incorporate stabilisation measures (such as geotextile, vegetative stabilisation or rock check dams) to prevent erosion.
- o Incorporate a stable erosion-proof outfall (such as a level spreader) in order to reduce water velocities and prevent scour at the outlet.
- o Ensure the Runoff Diversion Channel/Bund outlet -
 - functions with a minimum of erosion,
 - directs clean runoff onto an undisturbed/stabilised area,
 - directs flows containing sediment into a sediment retention structure,
 - is located in such a position that ideally suits the field conditions.

Considerations:

- o Consider designing an emergency overflow section or bypass area to limit damage from storms that exceed the design storm.
- o Avoid abrupt changes in grade which can lead to sediment deposition and overtopping, or erosion.

Maintenance

Runoff Diversion Channels/Bunds need regular maintenance to keep functioning throughout their life. Regular maintenance consists of the following.

- o Inspect after every rainfall and during periods of prolonged rainfall for scour and areas where they may breach.
- o Repair immediately if required to ensure that the design capacity is maintained.
- o Remove any accumulated sediment deposited in the Runoff Diversion Channel/Bund due to low gradients and velocities.
- o Carefully check outlets to ensure that these remain free from scour and erosion.

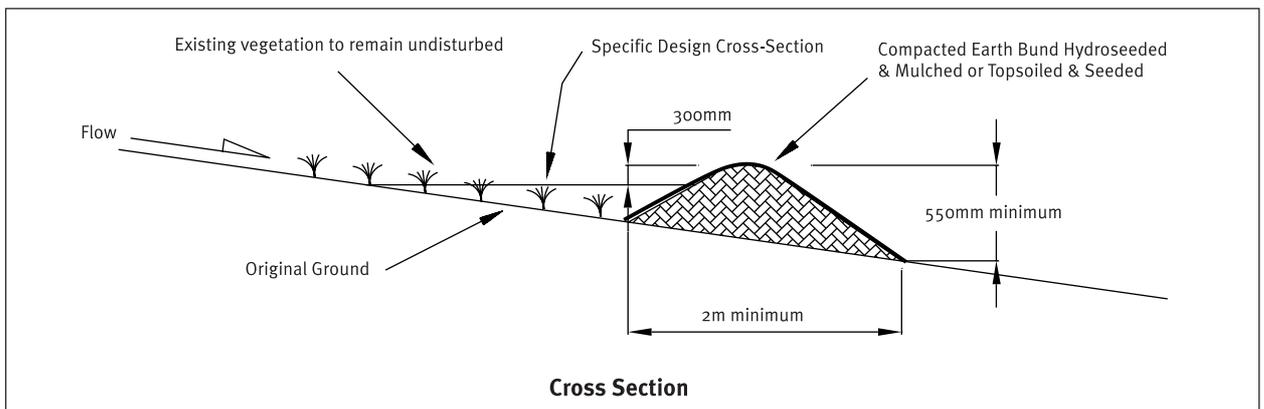


Figure 1.1.1 *Cleanwater Runoff Diversion Bund*

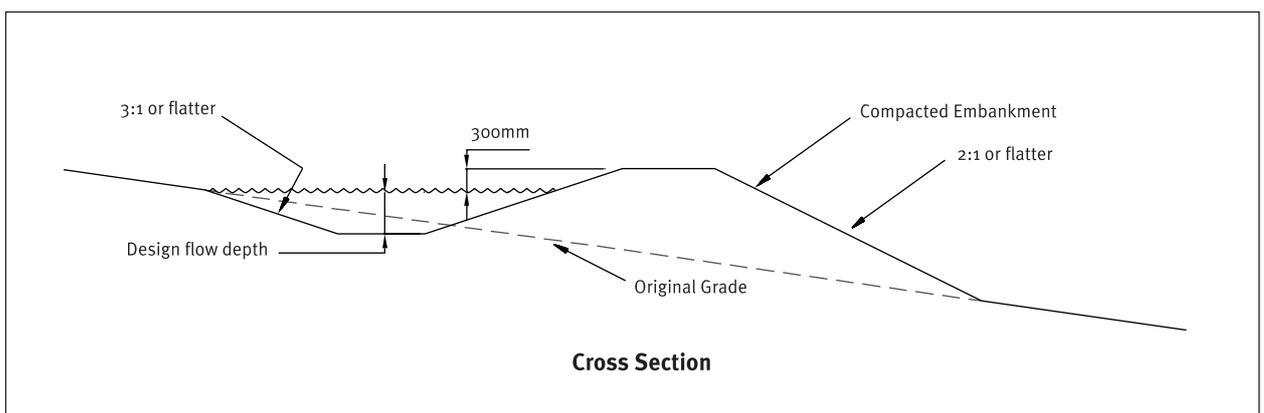


Figure 1.1.2 *Runoff Diversion Channel*

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

1.2 Contour Drain



Plate 1.2 Contour Drain

Definition

A temporary ridge or excavated channel, or combination of ridge and channel, constructed to convey water across sloping land on a minimal gradient.

Purpose

To break overland flow down disturbed slopes by limiting slope length and thus the erosive power of runoff, and to divert sediment laden water to appropriate controls or stable outlets.

Application

Use Contour Drains in the following situations.

- o At intervals across disturbed areas to shorten overland flow distances.
- o As temporary or daily controls.
- o To split and direct flow from disturbed areas to Runoff Diversion Channels/Bunds.

Design

Ensure gradients are no greater than 2% and the Contour Drains are kept as short as practicable in order to minimise erosion. The positioning of Contour Drains is often determined by the necessity for stable outfalls, but in general the following spacing applies:

Table 1.2 Positioning of Contour Drains

Slope of Site (%)	Spacing of Contour Drains (o)
5	50
10	40
15	30

Maintenance

- o Install Contour Drains at the end of each day.
- o Inspect Contour Drains after every rainfall and during periods of prolonged rainfall.
- o Immediately carry out any maintenance that is required.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

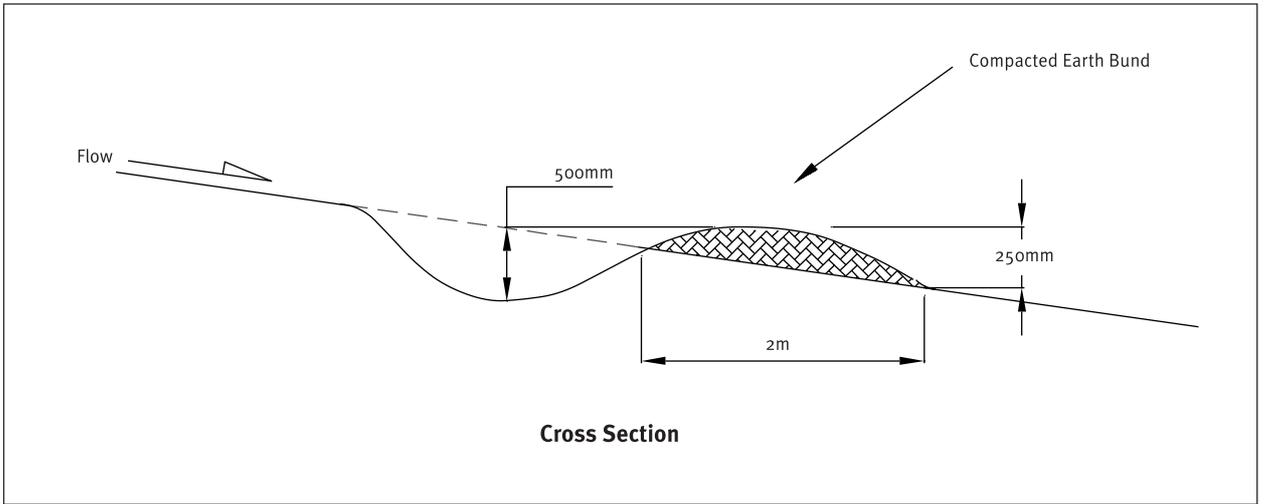


Figure 1.2 Contour Drain

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

1.3 Benched Slope



Plate 1.3 Benched Slope

Definition

Modification of a slope by reverse sloping to divert runoff to an appropriate conveyance system.

Purpose

To limit the velocity and volume, and hence the erosive power, of water moving down a slope and therefore minimising erosion of the slope face.

Application

Benched Slopes are primarily used on long slopes and/or steep slopes where rilling may be expected as runoff travels down the slope. Consider Benched Slopes on all slopes however ensure that consideration of soil structure and stability occurs. The spacing of the Benched Slopes and the specific conditions for which they apply depend on slope height and angle. The primary purpose is to prevent the concentration of runoff which, in turn, increases erosion.

Table 1.3 Benched Slope Design

Slope Angle (%)	Vertical Height (o) Between Benches
50	10
33	15
25	20

Design

- o Provide Benched Slopes for slopes exceeding 25% – see Table 1.3.
- o Locate Benched Slopes to divide the slope face as equally as possible and convey the water from each bench to a stable outlet. Soil types, seeps and location of rock outcrops need to be taken into consideration when designing Benched Slopes.
- o Ensure Benched Slopes are a minimum of 2 o wide, for ease of maintenance.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

- o Design Benched Slopes with a reverse slope of 15% or flatter to the toe of the upper slope and with a minimum depth of 0.3 m. Keep the gradient of each Benched Slope to its outlet below 2 %, unless design, stabilisation and calculations demonstrate that erosion is minimised.
- o Keep the flow length along a Benched Slope to less than 250m unless design and calculations can demonstrate that erosion is minimised.
- o Divert surface water from the face of all cut and/or fill slopes of Benched Slopes by the use of Runoff Diversion Channels/Bunds except where:
 - the face of the slope is not subject to any concentrated flows of surface water such as from natural drainage, channels or other concentrated discharge points, and
 - the face of the slope is protected by special erosion control materials including, but not limited to, approved vegetative stabilisation practices, rip-rap, or other approved stabilisation methods.
- o Provide subsurface drainage where necessary to intercept seepage that would otherwise adversely affect slope stability or create excessively wet site conditions. Check the requirements of the city or district council.
- o Do not construct Benched Slopes close to property lines where they could endanger adjoining properties without adequately protecting such properties against sedimentation, erosion, slippage, settlement, subsidence or other related damages. Check the requirements of the city or district council.
- o Stabilise all disturbed areas.

Construction Specifications

- o Compact all fills to reduce erosion, slippage, settlement, subsidence, or other related problems.
- o Keep all Benched Slopes free of unconsolidated sediment during all phases of development.
- o Permanently stabilise all graded areas immediately on completion of grading.

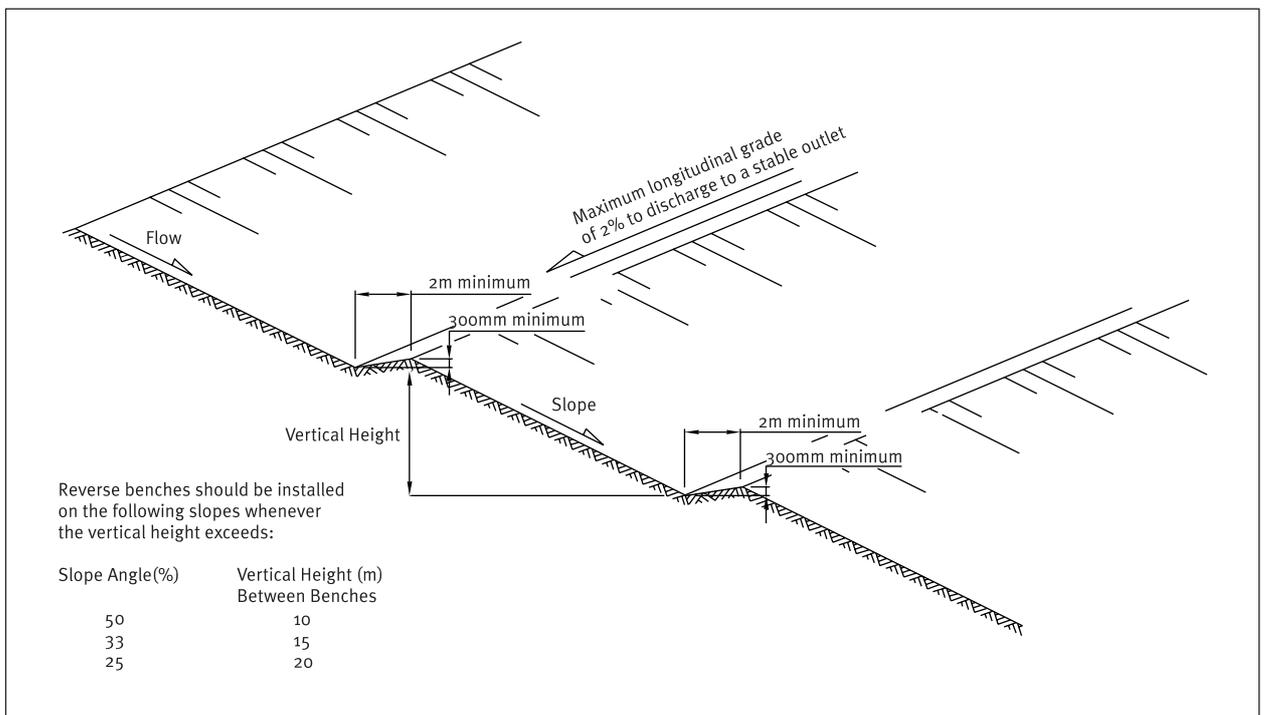


Figure 1.3 Benched Slope

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

1.4 Rock Check Dam



Plate 1.4 Rock Check Dam

Definition

Small temporary dam constructed across a channel (excluding perennial watercourses), usually in series, to reduce flow velocity. May also help retain sediment.

Purpose

To reduce the velocity of concentrated flows, thereby reducing erosion of the channel. While trapping some sediment, they are not designed to be utilised as a sediment retention measure.

Application

This practice applies primarily to earthworks sites where it is necessary to slow velocity of flows in order to prevent erosion. Do not use Rock Check Dams in a perennial watercourse. Specific applications include the following.

- Temporary channels which, because of their short length of service, are not suitable for non-erodible lining but still need some protection to reduce erosion.

- Permanent channels which for some reason cannot receive a permanent non-erodible lining for an extended period of time.
- Temporary or permanent channels which need protection during the establishment of a vegetative cover.

Design

- Ensure the catchment in question has a contributory drainage area of less than 1.0 ha.
- Direct all flows over the centre of the Rock Check Dam.
- Construct each Rock Check Dam with a maximum centre height of 600 mm. Build the sides 200 mm higher than the centre to direct flows to the centre.
- Do not use Rock Check Dams as a primary sediment trapping facility. Ensure that any sediment laden runoff passes through a sediment trapping device or devices before being discharged from the site.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

- o Place a mix of 100 mm to 300 mm diameter washed rock to completely cover the width of the channel. In steeper catchments use larger sized rock (0.5 – 1.0 o) on the downstream side of the Rock Check Dam.
- o Ensure rock batter slopes are 2:1.
- o Locate Rock Check Dams at a spacing so that the toe of the upstream dam is equal in height elevation to the crest of the downstream one. Ensure the toe of the upstream dam is never higher than the crest of the downstream dam.

- o Supply specific design and calculations if Rock Check Dams are to be used on catchments greater than 1.0 ha.

Maintenance

While this measure is not intended to be used primarily for sediment trapping, some sediment can accumulate behind the Rock Check Dams. Remove this sediment when it has accumulated to 50% of the original height of the dam.

When temporary channels are no longer needed, remove Rock Check Dams and fill in the channel. In permanent channels, remove Rock Check Dams when a permanent lining can be installed. In the case of grass lined ditches, Rock Check Dams may be removed when grass has matured sufficiently to protect the channel. The area beneath the Rock Check Dams needs to be seeded and mulched or stabilised with appropriate geotextile immediately after removing the dams.

Table 1.4 Rock Check Dam Design

Slope	Spacing (o) Between Dams	
	450 mm Centre Height	600 mm Centre Height
2% or less	24	30
2% to 4%	12	15
4% to 7%	8	11
7% to 10%	5	6
Over 10%	Utilise Stabilised Channel	

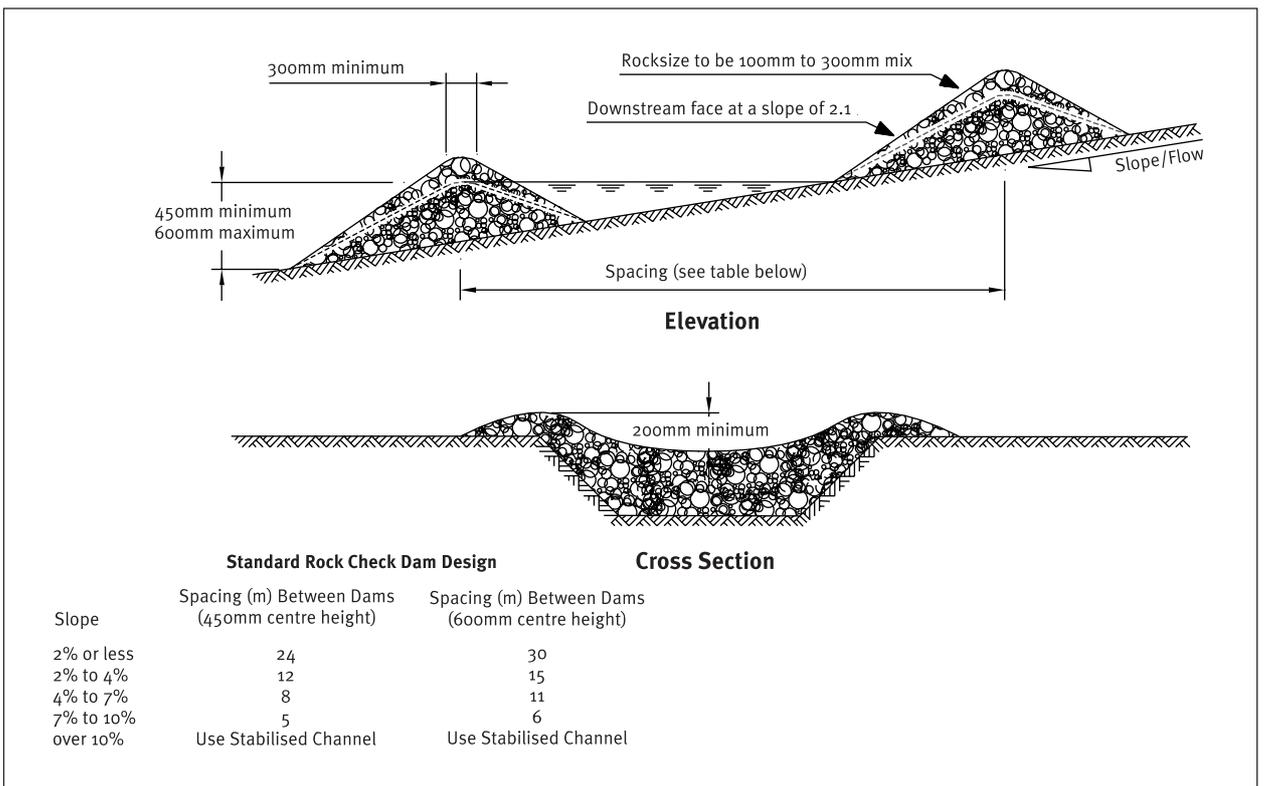


Figure 1.4 Rock Check Dam

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

1.5 Top Soiling



Definition

The placement of topsoil over a prepared subsoil prior to the establishment of vegetation.

Purpose

To provide a suitable soil medium for vegetative growth for erosion control while providing some limited short term erosion control capability by protecting subsoils and absorbing water.

Application

Top Soiling is recommended in the following situations.

- Where the texture and/or the organic component of the exposed subsoil or parent material can not produce adequate vegetative growth.
- Where the soil material is so shallow that the rooting zone is not deep enough to support plants or furnish continuing supplies of moisture and plant nutrients.
- Where high quality turf and landscape plantings are to be established.

Generally Top Soiling is combined with vegetation establishment and is not seen as an erosion control measure in itself. Top Soiling as a short term standalone erosion control measure is limited to sites with an average slope of less than 5 % with Contour Drains installed as per these Guidelines and for periods of less than two weeks only.

Top Soiling alone will not provide sufficient erosion protection to allow sediment control measures to be

removed.

When staging within an earthworks operation, Top Soiling as a treatment in itself is not acceptable and other means of stabilisation such as revegetation will also be required.

Design

Not Applicable.

Construction Specifications

Once site shaping work has been completed, evenly spread a minimum of 100 mm of topsoil before revegetating. On steeper sites (over 25%), scarify the subsoils to a depth of a least 100 mm to ensure bonding between topsoil and subsoil before applying topsoil.

Incorporate Surface Roughening into all Top Soiling operations in accordance with these Guidelines.

In general topsoil has a beneficial effect in light rain because it can hold more moisture than the underlying clay material. However, during heavy rain, topsoil will become saturated and rill erosion and slumping can result. For this reason it is important to establish a full vegetative cover as soon as possible and retain all sediment retention facilities on the site until a vegetative cover is fully established.

Maintenance

Check the condition of the topsoil on a regular basis and regrade and/or replace where necessary so as to always maintain the 100 mm minimum depth of topsoil and

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

surface roughening.

1.6.1 Temporary and Permanent Seeding



Definition

The planting and establishment of quick growing and/or perennial vegetation to provide temporary and/or permanent stabilisation on exposed areas.

Purpose

Temporary Seeding is designed to stabilise the soil and to protect disturbed areas until permanent vegetation or other erosion control measures can be established. It may be used where the area to be stabilised is not yet up to final grade and requires further earthworks, but needs temporary stabilisation.

Permanent Seeding is designed to permanently stabilise soil on disturbed areas to reduce sediment and runoff to downstream or off-site areas.

Application

Temporary Seeding

Use on any cleared or unvegetated areas which are subject to erosion and will not be earthworked for a period of 14 days or more. Temporary stabilisation is normally practised where the vegetative cover is required for less than one year. In some circumstances straw mulching may be used as an alternative (see Part B, Section 1.6.3 of these Guidelines).

Permanent Seeding

This practice applies to any site where establishing permanent vegetation is important to protect bare earth. It may also be used on rough graded areas that will not be brought to final grade for a year or more.

Design

Not Applicable.

Construction Specifications

o **Site Preparation**

Before seeding, install all required erosion and sediment control practices such as diversion channels and sediment retention structures. Grade the site as necessary to permit the use of conventional equipment for soil preparation, seeding and maintenance.

o **Seed Bed Preparation**

Prepare a good seed bed to ensure successful establishment of vegetation. Take care to ensure that the seed bed is free of large clods, rocks and other unsuitable material. Apply topsoil at a minimum depth of 100 mm to allow for a loose and friable soil surface.

o **Soil Amendments**

Apply fertiliser as outlined in Table 1.6 of these Guidelines. This fertiliser application rate can be varied with the approval of the Auckland Regional Council.

For large sites or unusual site conditions it is advisable to have soil fertility tests done. Some soils may require the addition of lime to improve pH.

o **Seeding**

Apply seed at a mixture and rate as in Table 1.6 of these Guidelines. This seeding rate can be varied with approval from the Auckland Regional Council. Apply the seed uniformly and sow at the recommended rate. Seed that is broadcast must be covered by raking and then lightly tamped into place. If Hydroseeding is required, then it can be utilised in accordance with Part B Section 1.6.2 of these Guidelines.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

o **Mulching**

When working on steep sites (greater than 25%) or during the winter period (between 30 April 30 and 1 October) mulching will need to be applied in accordance with Part B Section 1.6.3 of these Guidelines immediately following seeding.

o **Irrigation**

Adequate moisture is essential for seed germination and plant growth. Irrigation can be very helpful in establishing vegetation during dry or hot weather conditions or on adverse site conditions.

Irrigation must be carefully controlled to prevent runoff and subsequent erosion. Inadequate or excessive irrigation can do more harm than good.

Maintenance

Reseed where seed germination is unsatisfactory or where erosion occurs. In the event of unsatisfactory germination after 30 April, the area will also require the application of Mulch in accordance with Part B Section 1.6.3 of these Guidelines.

Depending on site conditions it may be necessary to irrigate, fertilise, oversow or re-establish plantings in order to provide vegetation for adequate erosion control. See Table 1.6 of these Guidelines for details of maintenance fertiliser applications.

Protect all revegetated areas from traffic flows and other activities such as the installation of drainage lines and utility services.

Table 1.6 Grass Seed and Fertiliser Application Rates

	Mix	Rate (kg/ha)	Comments
Seeding	Temporary Annual Rye Grass (ie. Tama) and Clover Seed mix Permanent Perennial Ryegrass and Brown Top with a Red/White Clover mix	300 Perennial – 120 Brown Top – 45 Clover – 45	Annual Rye Grass mix is more suitable for colder times of the year when ground temperatures are low.
Fertiliser Application	D.A.P (Di-Ammonium Phosphate) N P K S 18:20:0:2	240	D.A.P is an ideal fertiliser for the rapid development of grass cover whilst neither damaging seed or inhibiting seed germination.
Maintenance Fertiliser Application	Straight Nitrogen eg Urea (46% N)	120	Urea provides an efficient means of encouraging further development of grass cover.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

1.6.2 Hydroseeding

HS

Definition

The application of seed, fertiliser and paper or wood pulp with water in the form of a slurry, sprayed over the area to be revegetated.

Purpose

To establish vegetation quickly while providing a degree of instant protection from rain drop impact.

Application

This practice applies to any site where vegetation establishment is important for the protection of bare earth surfaces. For example:

- Critical areas on the site prone to erosion such as steep slopes and Sediment Retention Pond batters.
- Critical areas on the site that cannot be stabilised by conventional sowing methods.
- Around watercourses or Runoff Diversion Channels where rapid establishment of a protective vegetative cover is required before introducing flows.

Design

Not Applicable.

Construction Specifications

The seed generally adheres to the pulp which improves the microclimate for germination and establishment. This method allows vegetation to establish on difficult sites and can extend into cooler winter months provided it is utilised with Mulching.

○ **Site Preparation**

Before Hydroseeding, install any needed erosion and sediment control practices such as Runoff Diversion Channels. Scarify any steep or smooth clay surfaces to improve retention of the Hydroseeding slurry.

Hydroseeding specifications need to be verified by the Auckland Regional Council prior to implementation, with recommended seeding and fertiliser application rates outlined in Table 1.6 of these Guidelines.

○ **Watering**

Hydroseeding requires moisture for germination and growth. Because Hydroseeding is often used for difficult sites the timing of the application to get favourable growing conditions is an important factor.

Maintenance

Heavy rainfall can wash Hydroseeding away, particularly from smooth clay surfaces and overland flowpaths. Where vegetation establishment is unsatisfactory the area will require Hydroseeding again. In the event of unsatisfactory germination after 30 April, the area will also require Mulching in accordance with Part B, Section 1.6.3 of these Guidelines.

Protect all revegetated areas from traffic flows and other activities such as the installation of drainage lines and utility services.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

1.6.3 Mulching

M



Plate 1.6.3.1 Mulching

Definition

The application of a protective layer of straw or other suitable material to the soil surface.

Purpose

To protect the soil surface from the erosive forces of raindrop impact and overland flow. Mulching also helps to conserve moisture, reduce runoff and erosion, control weeds, prevent soil crusting and promote the establishment of desirable vegetation.

Application

This practice applies to any site where vegetation establishment is important for the protection of bare earth surfaces.

Mulching can be used at any time where the instant protection of the soil surface is desired. Mulching can be used in conjunction with seeding to establish vegetation, or by itself to provide temporary protection of the soil surface.

Mulching is used during the winter months (30 April to 1 October) to provide immediate stabilisation. Because grass germination will be too slow to establish effective grass cover using conventional sowing methods.

Design

Not Applicable.

Construction Specifications

Site Preparation

Before Mulching install any needed erosion and sediment control practices such as Runoff Diversion Channels and sediment retention structures.

Mulching

When Mulching, use unrotted small grain straw applied at a minimum rate of 6000 kg per ha.

Ensure the material is free of any noxious plants as identified under Auckland Regional Council policy. Call Enviroline on 0800 80 60 40 for an up-to-date list of plant pests.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Mulching needs to be spread uniformly and secured to the soil surface. For smaller areas hand spreading of mulch material can be adequate. For larger sites, apply mulch mechanically to ensure even spread and appropriate application.

Apply fertiliser with Mulching as outlined in Table 1.6 of these Guidelines.

Alternatives such as wood chips and chemical soil binders can be utilised where appropriate.

Wood chips are suitable for areas that will not be closely mowed around such as ornamental plantings. They do not require the application of a tackifier and if readily available can be a relatively inexpensive mulch. They are slow to break down and normally require nitrogen application to prevent nutrient deficiency in plants. Do not use woodchips around watercourses or in areas where water can pond.

To avoid water contamination, any alternative to straw mulch must be approved by the Auckland Regional Council.

A wide range of synthetic mulching compounds are available to stabilise and protect the soil surface. These

include emulsions, acrylimides and dispersions of vinyl compounds. They do not insulate the soil or retain moisture when used alone and therefore do little to aid seed establishment. They are also easily damaged by traffic, decompose relatively quickly and can be quite expensive in comparison to organic mulches.

Rovings, another alternative, are fibres that are teased out from spools of yarn by compressed air and woven onto the surface of the land. They are then stabilised with a tackifier, with seed sown beforehand. These alternatives may be acceptable in certain circumstances but should be discussed in detail with the Auckland Regional Council prior to their implementation.

Anchoring Mulch

Anchor Mulch in place immediately after application to avoid or minimise loss by wind or water. Numerous methods are available. Generally, although the Mulch is 'settled' in place by the first rainfall, the Auckland Regional Council also requires it be retained by crimping into the soil with discs or spraying a tackifier with the Mulch. When using some chemical tackifiers, take care to avoid adverse offsite effects of runoff.



Plate 1.6.3.2 Mulch Crimping

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

1.6.4 Turfing



Plate 1.6.4 Turfing

Definition

The establishment and permanent stabilisation of disturbed areas by laying a continuous cover of grass turf.

Purpose

To provide immediate vegetative cover to stabilise soil on disturbed areas such as. For example:

- Critical erosion prone areas on the site.
- Critical areas on the site that cannot be stabilised by conventional sowing methods.
- Runoff Diversion Channels and other areas of concentrated flow where velocities will not exceed the specifications for a grass lining.

Application

Turfing is the preferred method for disturbed areas that must be immediately stabilised. It is particularly useful for:

- Watercourses and channels carrying intermittent flow.

- Areas around drop inlets.
- Residential or commercial lawns to allow prompt use and for aesthetic reasons.
- Steep areas.

Design

While there are no specific design criteria for Turfing, Turf reinforced with geosynthetic matting should be considered for areas of high erosion potential; for example, steep slopes or concentrated overland flow paths.

Construction Specifications

Site Preparation

Before Turfing, properly prepare the site in order to ensure the successful establishment of vegetation. This includes applying fertiliser as in Table 1.6 of these Guidelines, uniformly grading the area, clearing all debris, removing stones and clods and scarifying hard packed surfaces.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Turf Installation

During periods of high temperatures, lightly irrigate soil immediately before laying turf.

Lay the first row of turf in a straight line with subsequent rows placed parallel to and tightly wedged against each other. Stagger lateral joints in a brick-like pattern. Do not stretch or overlap turf and make sure all joints are butted tight in order to prevent voids, which can cause drying of the grass roots.

On sloping areas or channels where erosion may be a problem, lay turf downslope with the ends of the turf material overlapped such that the upslope turf overlaps the downslope turf by at least 100 mm. It may be necessary to secure the turf with pegs or staples. Ensure the turf at the top of the slope is appropriately trenched in to prevent runoff moving underneath it.

As Turfing is completed in one area, roll or tamp the entire area to ensure solid contact of the grass roots with the soil surface. After rolling, immediately water the Turf until the underside of the new turf and soil surface below the turf are thoroughly wet.

Maintenance

- Water daily during the first week of laying unless there is adequate rainfall.
- Do not mow the area until the turf is firmly rooted.
- Apply fertiliser regularly as in Table 1.6 of these Guidelines for ongoing successful establishment.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

1.7 Geosynthetic Erosion Control Systems (GECS)

GS

Definition

The artificial protection of channels and erodible slopes utilising artificial erosion control material such as geosynthetic matting, geotextiles or erosion matting.

Purpose

To immediately reduce the erosion potential of disturbed areas and/or to reduce or eliminate erosion on critical sites during the period necessary to establish protective vegetation. Some forms of artificial protection may also help to establish protective vegetation.

Application

- On short steep slopes.
- On areas that have highly erodible soils.
- In situations where tensile and shear strength characteristics of conventional mulches limit their effectiveness in high runoff velocities.
- In channels (both perennial and ephemeral) where the design flow produces tractive shear forces greater than in-situ soil can withstand.
- In areas where there is not enough room to install adequate sediment controls.
- In critical erosion-prone areas such as sediment retention pond outlet and inlet points.
- In areas that may be slow to establish an adequate permanent vegetative cover.
- In areas where the downstream environment is of high value and rapid stabilisation is needed.

Design

There are two categories of GECS; temporary degradable and permanent non-degradable.

Temporary Degradable GECS

These are used to prevent loss of seedbed and to promote vegetation establishment where vegetation alone will be sufficient for site protection once established. Common temporary GECS are erosion control blankets, open weave meshes/matting and organic erosion control netting (fibre mats factory-bonded to synthetic netting).

Permanent Non-Degradable GECS

These are used to extend the erosion control limits of vegetation, soil, rock or other materials. Common permanent GECS are three-dimensional erosion control and revegetation mats, geocellular confinement systems, reno mattresses and gabions.

The selection of an appropriate GECS is a complex balancing of the relative importance of the following requirements.

- *Endurance*: durability, degree of resistance to deformation over time and ultraviolet radiation and to chemicals (natural or as pollutants).
- *Physical*: thickness, weight, specific gravity and degree of light penetration. Generally a thicker heavier material will provide better protection.
- *Hydraulic*: ability of the system to resist tractive shear strength and protect against channel erosion, erosion of underlying soils or slope erosion from rainfall impact.
- *Mechanical*: deformation and strength behaviour. Tensile strength and elongation, stiffness (how well it will conform to the subgrade) and how well it will resist tractive shear forces.

When a geotextile is to be used for temporary channel or spillway protection, consider combining a high strength, low permeability cloth over a soft pliable needle punch cloth pinned to ensure the cloth is in contact with the entire soil surface. Trench and pin all flow entry points such that the upslope geotextile edge overlaps the downslope geotextile mat. Toe in the upslope end of the downslope mat.

In high risk areas such as spillways and diversions, pin geotextiles down on a 0.5 m grid or in accordance with the manufacturers' specifications, whichever provides the greatest number of contact points.

There is a large number of products available for all situations and depending on the degree of protection needed, a product or combination of products will be available to suit the situation. It is vital that the product utilised is designed for the intended use and installed

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

and maintained according to its specifications. Decision analysis techniques ranking the various GECS available should be used based on the following categories.

- o Sediment yield (generally ranked highest)
- o Stability under flow
- o Vegetation enhancement
- o Durability
- o Cost

When installing GECS within a channel, it is important that the design velocity of the product is considered and again that the product chosen is appropriate for the use.

Many products provide for the combination of a revegetation technique and an artificial erosion control measure. Again, design specifications need to be closely followed in all cases.

Maintenance

Inspect after every rainfall and undertake any maintenance immediately.

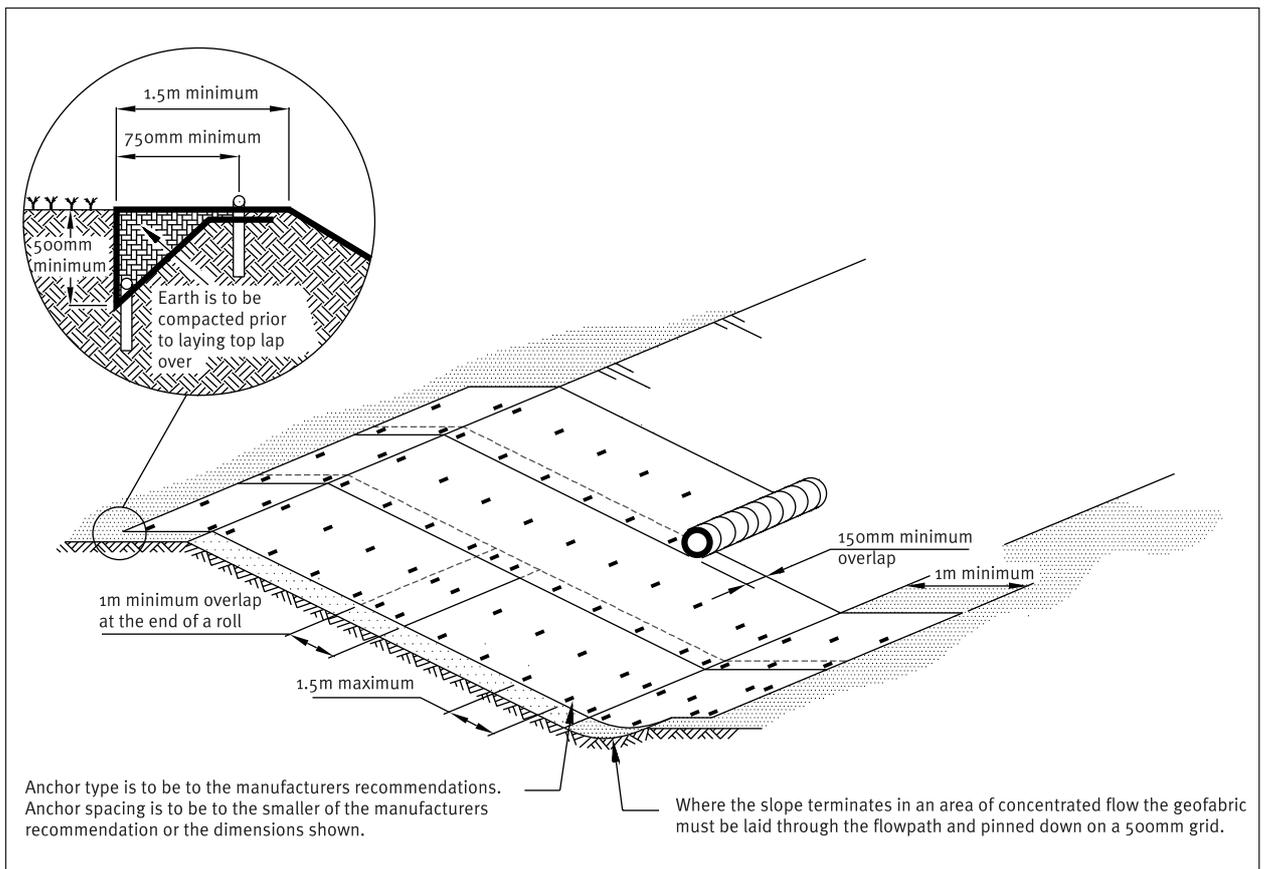


Figure 1.7.1 Geotextile Laid on Slope

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

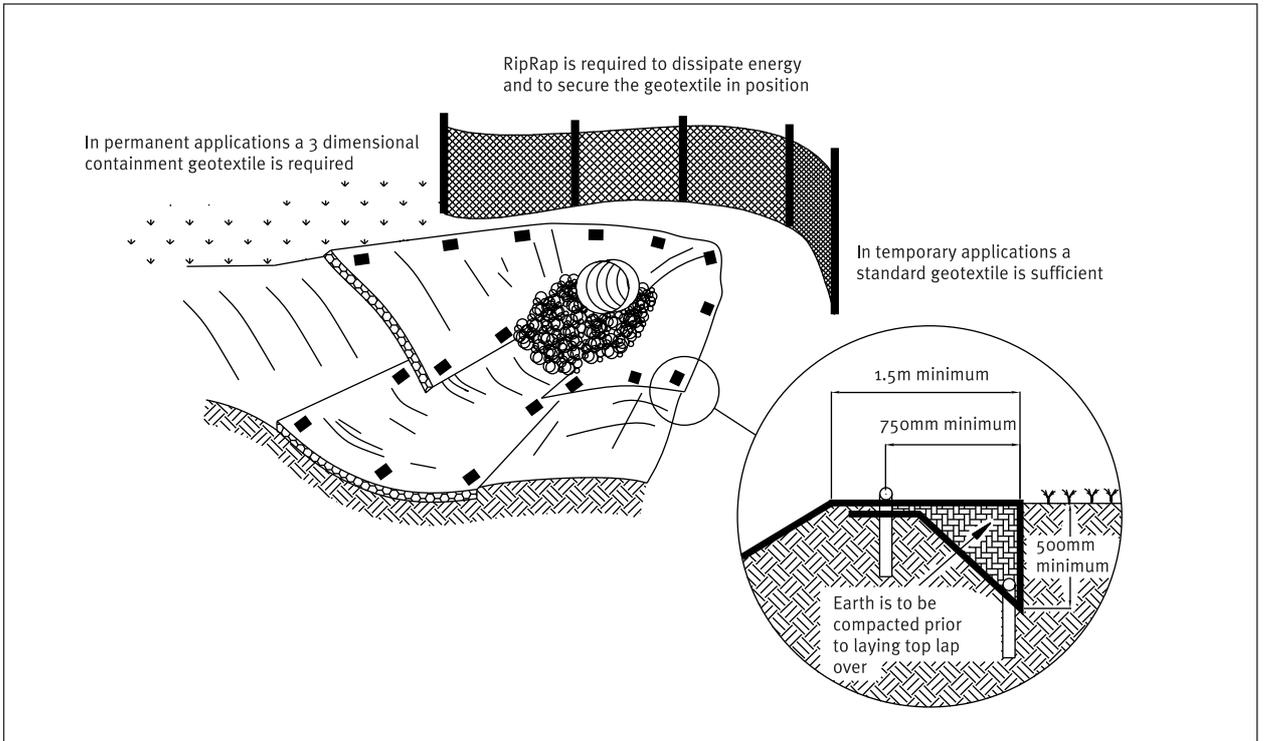


Figure 1.7.2 Geotextile at Culvert Outlet

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

1.8 Stabilised Construction Entrance



Plate 1.8 *Stabilised Construction Entrance*

Definition

A stabilised pad of aggregate on a filter cloth base located at any point where traffic will be entering or leaving a construction site.

Purpose

To prevent site access points from becoming sediment sources and to help minimise dust generation and disturbance of areas adjacent to the road frontage by giving a defined entry/exit point.

Application

Use a Stabilised Construction Entrance at all points of construction site ingress and egress with a construction plan limiting traffic to these entrances only. They are particularly useful on small construction sites but can be utilised for all projects.

Design

- o Clear the entrance and exit area of all vegetation, roots and other unsuitable material and properly grade it.
- o Provide drainage to carry runoff from the Stabilised Construction Entrance to a sediment control measure.
- o Place aggregate to the specifications below and smooth it.

Table 1.8 Stabilised Construction Entrance Aggregate Specifications

Aggregate Size	50 – 75 mm washed aggregate
Thickness	150 mm minimum
Length	10 m minimum
Width	4 m minimum

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Maintenance

Maintain the Stabilised Construction Entrance in a condition to prevent sediment from leaving the construction site. After each rainfall inspect any structure used to trap sediment from the Stabilised Construction Entrance and clean out as necessary.

When wheel washing is also required, ensure this is done on an area stabilised with aggregate which drains to an approved sediment retention facility.

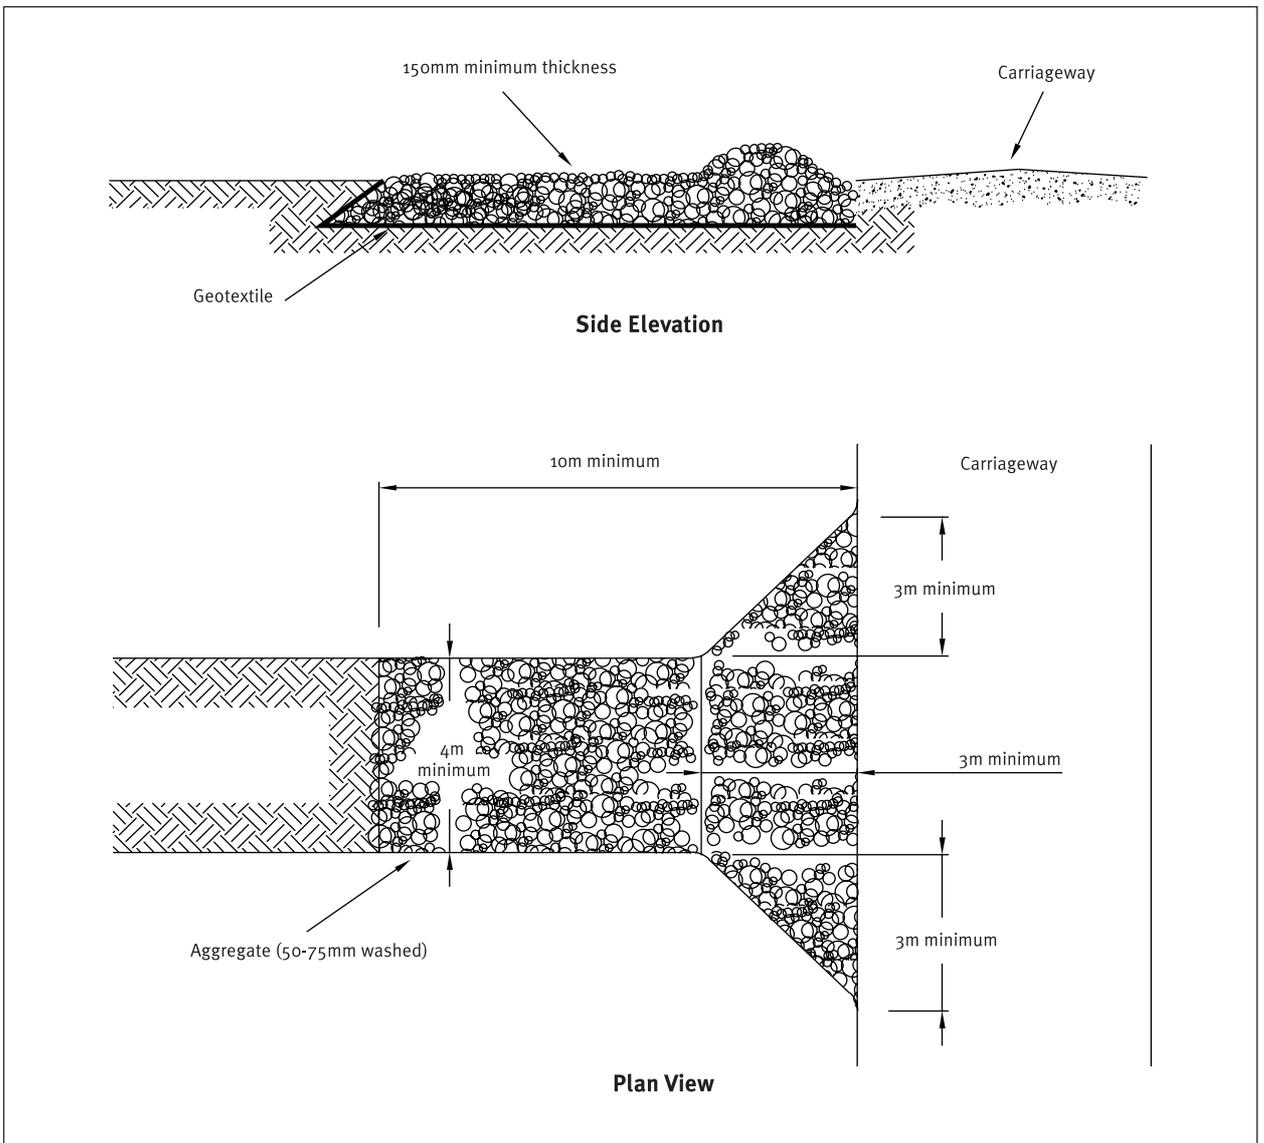


Figure 1.8 Stabilised Construction Entrance

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

1.9 Pipe Drop Structure/Flume

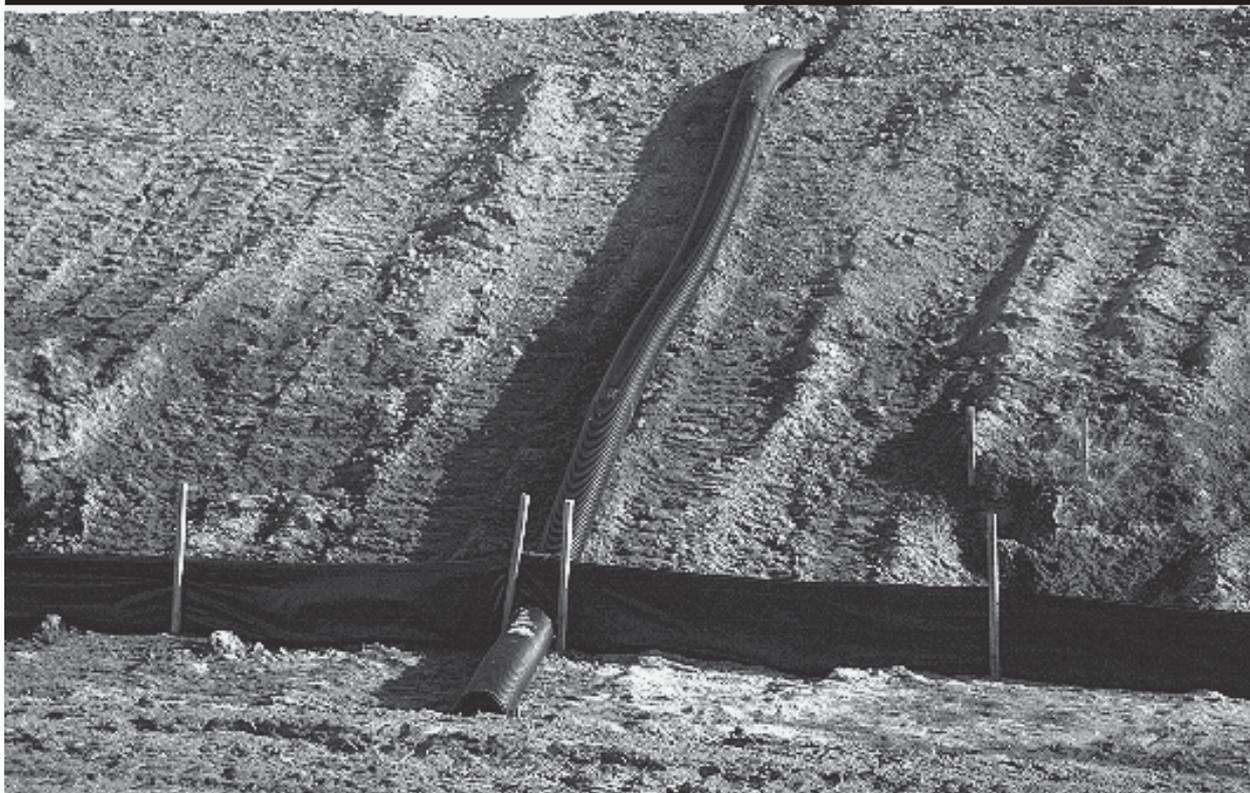


Plate 1.9 Pipe Drop Structure

Definition

A temporary pipe structure or constructed flume placed from the top of a slope to the bottom.

Purpose

A Pipe Drop Structure or a Flume is installed to convey surface runoff down the face of un stabilised slopes in order to minimise erosion on the slope face.

Application

Pipe Drop Structures or Flumes are used in conjunction with Runoff Diversion Channels. The Runoff Diversion Channels direct surface runoff to the Pipe Drop Structure or Flume which conveys concentrated flow down the face of a slope. Limit the catchment area of each Pipe Drop Structure or Flume to 1.0 ha. If other forms of Pipe Drop Structures or Flumes are being considered, Auckland Regional Council approval of those structures will be necessary on a case by case basis.

Design

- o Construct all Pipe Drop Structures or Flumes of watertight materials.
- o Extend the Pipe Drop Structure or Flume beyond the toe of the slope and adequately protect the outlet from erosion using riprap over a geotextile apron.
- o Use of the following Design Criteria for Pipe Drop Structure, is shown in Figure 1.9.

Table 1.9 Design Criteria for Pipe Drop Structure

Pipe Diameter (mm)	Maximum Catchment Area (ha)
150	0.05
300	0.2
450	0.6
500	1.0
600	1.0

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

- Ensure that at the Pipe Drop Structure or Flume inlet, the height of the Runoff Diversion Channel is at least twice the pipe diameter or height of Flume as measured from the invert.
- Install a flared entrance section of compacted earth. To prevent erosion, place impermeable geotextile fabric into the inlet extended a minimum of 1.0 m in front of and to the side of the inlet and up the sides of the flared entrance. Ensure this geotextile is keyed 150 mm into the ground along all edges.
- When the catchment area is disturbed, ensure the Pipe Drop Structure or Flume discharges into a Sediment Retention Pond or a stable conveyance system that leads to a pond. When the catchment area is stabilised, ensure the Pipe Drop Structure or Flume outlets onto a stabilised area at a non-erosive velocity. The point of discharge may be protected by rock rip rap.
- Ensure the Pipe Drop Structure or Flume has a minimum slope of 3%.

Construction Specifications for Pipe Drop Structures

- A common cause of failure of Pipe Drop Structures is water saturating the soil and seeping along the pipe where it connects to the Runoff Diversion Channel. Backfill properly around and under the pipe with stable material in order to achieve firm contact between the pipe and the soil at all points to eliminate this type of failure. Pipe material used for the Pipe Drop Structure can consist of rigid pipe material or flexible pipe as required. If flexible pipe material is utilised, it is vital that the material be pinned to the slope in the required position.
- Place Pipe Drop Structures on undisturbed soil or well-compacted fill at locations as detailed within the Erosion and Sediment Control Plan for the site.
- Immediately stabilise all disturbed areas following construction.

- Secure the Pipe Drop Structure to the slope at least every 4 m. Use no less than two anchors equally spaced along the length of the pipe.
- Ensure all pipe connections are watertight.

Construction Specifications for Flumes

- A common failure of Flumes is outflanking of the Flume entrance or scouring of the invert to the Flume. This can be prevented by waterproofing the entrance to the Flume by trenching in an appropriate impervious geotextile or plastic liner so that all flows are channelled directly into the flume. Alternatively a piped entrance can be installed.
- Flumes can be constructed from materials such as corrugated steel, construction ply, sawn timber or halved plastic piping.
- Construct the Flume to ensure there are no leaks. For wooden or plywood Flumes or Flumes where leakage is likely, extend an impervious liner down the full length of the Flume structure.
- For slopes greater than 30%, a Flume can be constructed from a standard 1.2 m x 2.4 m x 22mm plywood sheet. This will be adequate for a catchment of up to one ha. Specific design is required for larger catchments.
- Fasten the Flume to the slope using waratahs or wooden stakes placed in pairs down the slope at 1 to 4 m spacings, depending on the Flume material used. Fasten the Flume to the waratahs or stakes using wire or steel strapping.
- Place Flumes on undisturbed soil or well compacted fill at locations as detailed in the site's Erosion and Sediment Control Plan.

Maintenance

- Inspect the Pipe Drop Structure/Flume periodically and after each rain event. Immediately carry out any maintenance required.
- Keep the inlet open at all times.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

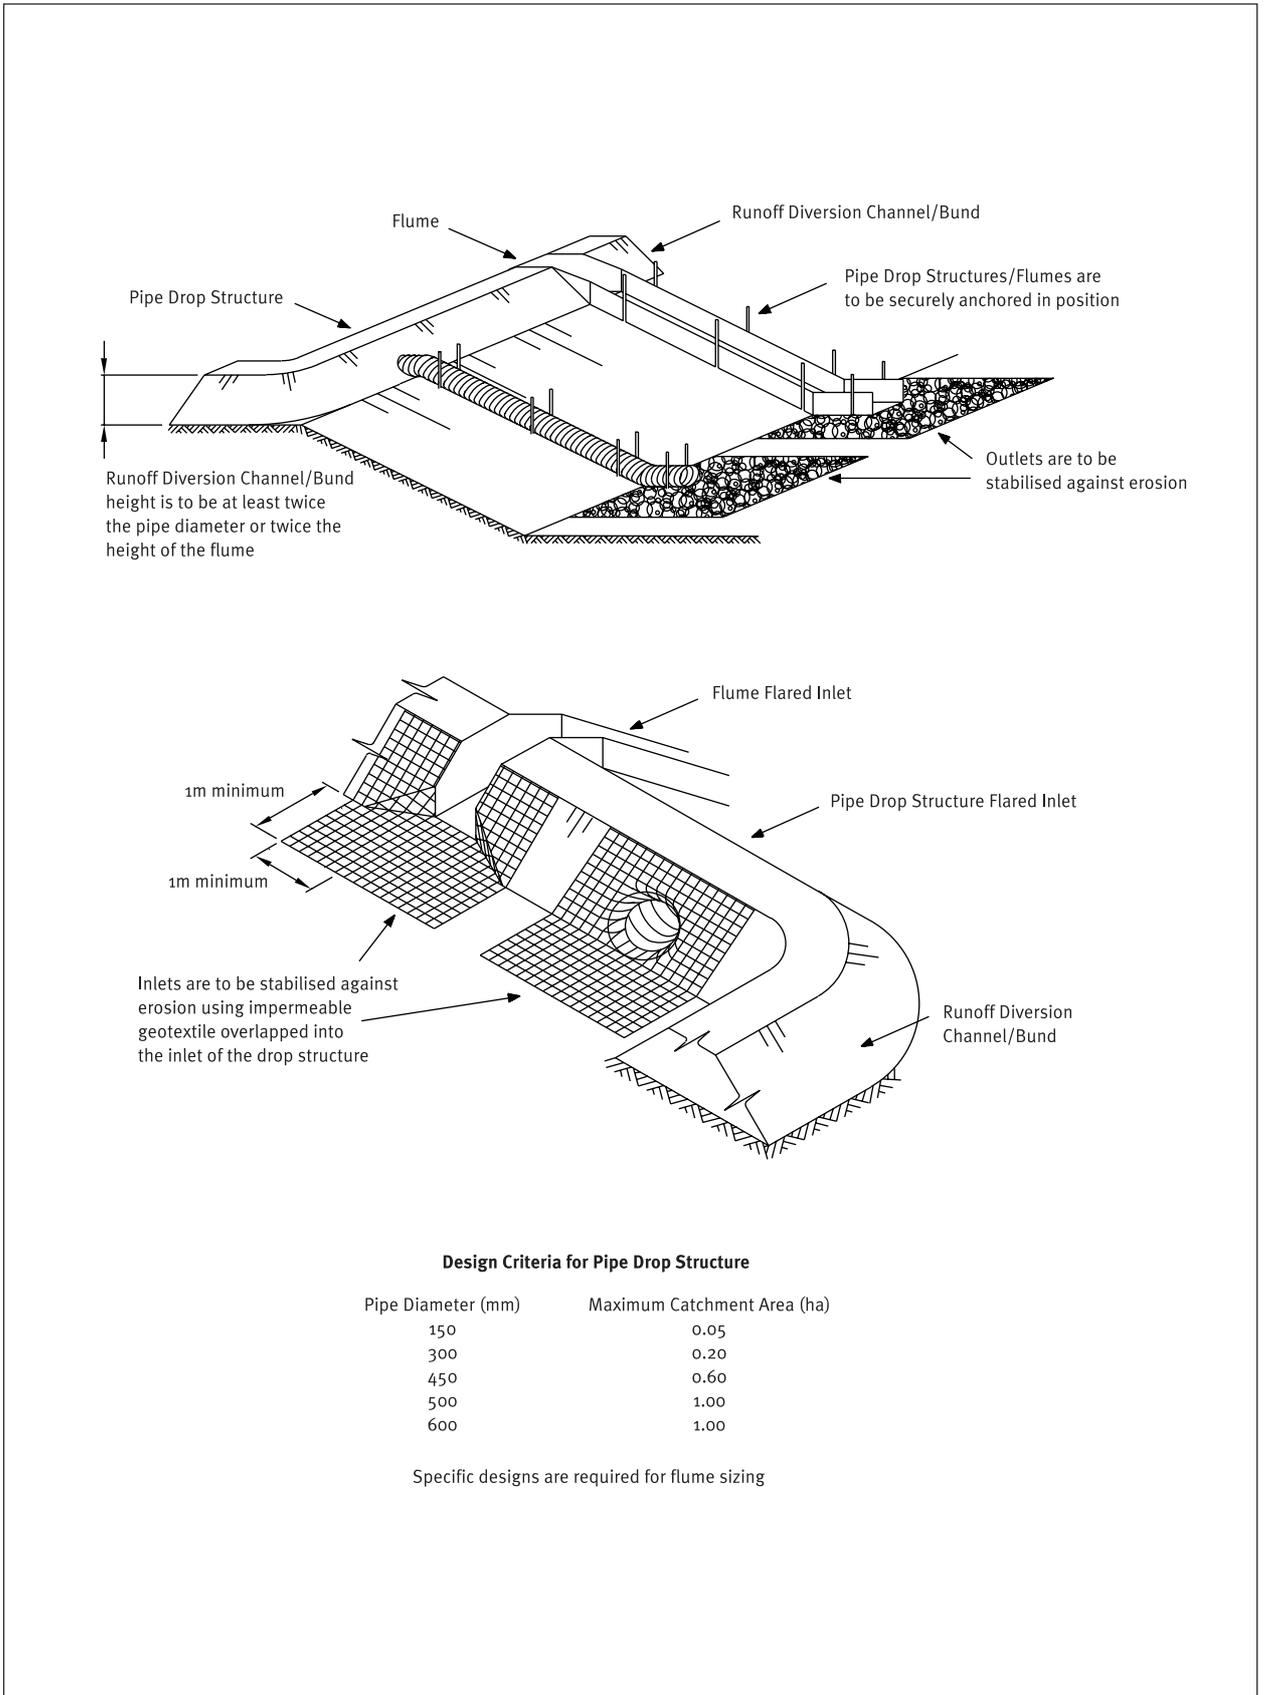


Figure 1.9 Pipe Drop Structure

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

1.10 Level Spreader



Definition

A non-erosive outlet for concentrated runoff constructed to disperse flows uniformly across a slope.

Purpose

To convert concentrated flow to sheet flow and release it uniformly over a stabilised area to prevent erosion.

The Level Spreader provides a relatively low cost option which can release concentrated flow where site conditions are suitable. Particular care is needed to ensure the Level Spreader outlet lip is completely level and is in stable, undisturbed soil or is well armoured. Any depressions in the Level Spreader lip will reconcentrate flows, resulting in further erosion.

Application

- Where sediment-free storm runoff can be released in a sheet flow over a stabilised slope without causing erosion.
- Where sediment-laden overland flow can be released in sheet flow across the inlet to a Sediment Retention Pond.
- Where the area below the Level Spreader lip is uniform with the slope of 10% or less and/or is stable for the anticipated flow conditions.
- Where the runoff water will not re-concentrate after release.
- Where there will be no traffic over the Level Spreader.

Design

- Determine the capacity of the Level Spreader by estimating peak flow from the 20 year storm.
- Where possible, choose a site for the Level Spreader that has a natural contour that will allow for the rapid spreading of flows, for example, at the end of a knoll or ridge.

- Select the appropriate length, width and depth of the spreader from Table 1.10 below.

Table 1.10 Level Spreader Design Criteria

Design Flow (m ³ /sec)	Inlet Width (o)	Depth (mm)	End Width (o)	Length (o)
0 – 0.3	3	150	1	3
0.3 – 0.6	5	180	1	7
0.6 – 0.9	7	220	1	10

- Construct a 6 o long transition section in the Runoff Diversion Channel leading up to the Level Spreader so the width of the Runoff Diversion Channel will smoothly meet the width of the Level Spreader to ensure uniform outflow. The Level Spreader trench tapers down to 1 o at the end of the Level Spreader.
- Maintain a minimum inlet width of 3 o.
- Ensure that the grade of the Level Spreader is 0%.
- Construct the Level Spreader lip on undisturbed soil, incorporating a 50 x 150 mm board (Spreader Beam) levelled and positioned edge on as shown below. An alternative is to armour the Level Spreader to a uniform height and zero grade over the length of the Level Spreader. Use geotextile and ensure the disturbed area is seeded and fertilised for vegetation establishment.


Maintenance

Inspect Level Spreaders after every rainfall until vegetation is established and promptly undertake any necessary repairs. Ensure vegetation is kept in a healthy and vigorous condition.


Figure 1.10 Level Spreader

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

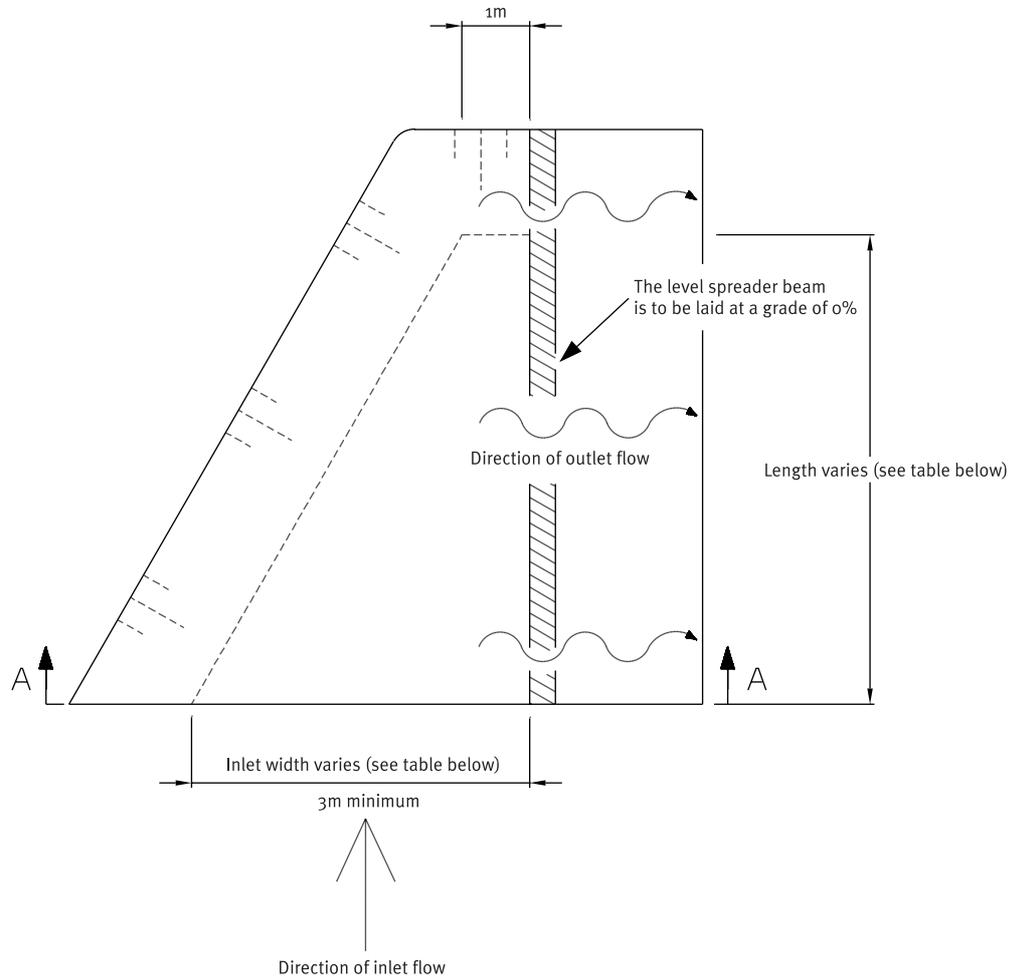

Plan View

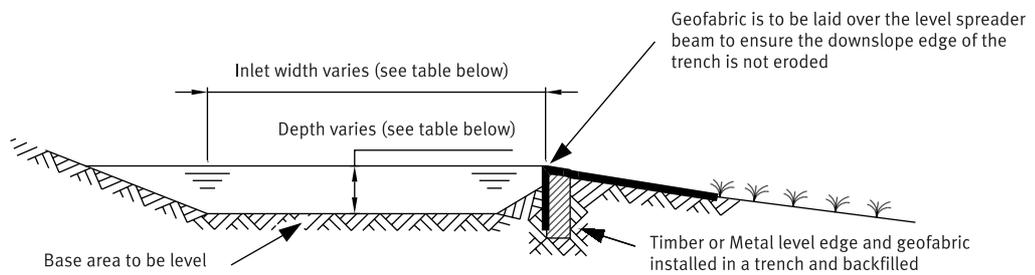

Section A-A

Design Flow (m ³ /sec)	Inlet width (m)	Depth (mm)	End width (m)	Length (m)
0-0.3	3	150	1	3
0.3-0.6	5	180	1	7
0.6-0.9	7	220	1	10

1.11 Surface Roughening

erosion&sedimentcontrol

1.11 Surface Roughening



Figure 1.11 Tracking

Definition

Roughening a bare earth surface with horizontal grooves running across the slope, or tracking with construction equipment.

Purpose

To aid in the establishment of vegetative cover from seed, to reduce runoff velocity, to increase infiltration, to reduce erosion and assist in sediment trapping.

Application

Apply Surface Roughening on all construction sites requiring slope stabilisation with vegetation, particularly on slopes steeper than 25%.

Design

Not Applicable.

Construction Specifications

Surface Roughening is promoted by the Auckland Regional Council because it aids the establishment of vegetation, improves infiltration and decreases runoff velocity. Graded areas with smooth, hard surfaces may be initially attractive but such surfaces increase the potential for erosion. A rough, loose soil surface gives a mulching effect that protects fertiliser and seed.

Various methods are available for Surface Roughening such as stair step grading, discing and forming grooves by machinery tracking. Factors to be taken into account when choosing a method are slope steepness, mowing/maintenance requirements and whether the slope is formed by cutting or filling.


Machinery tracking up and down the slope is the recommended method, with the cleats of the machine tracks providing a series of mini contour drains, slowing overland flow down the slope and helping to keep the grass seed on the slope.

Maintenance

Periodically check the slopes for rills and washes. Reseed and/or rework the area as necessary.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

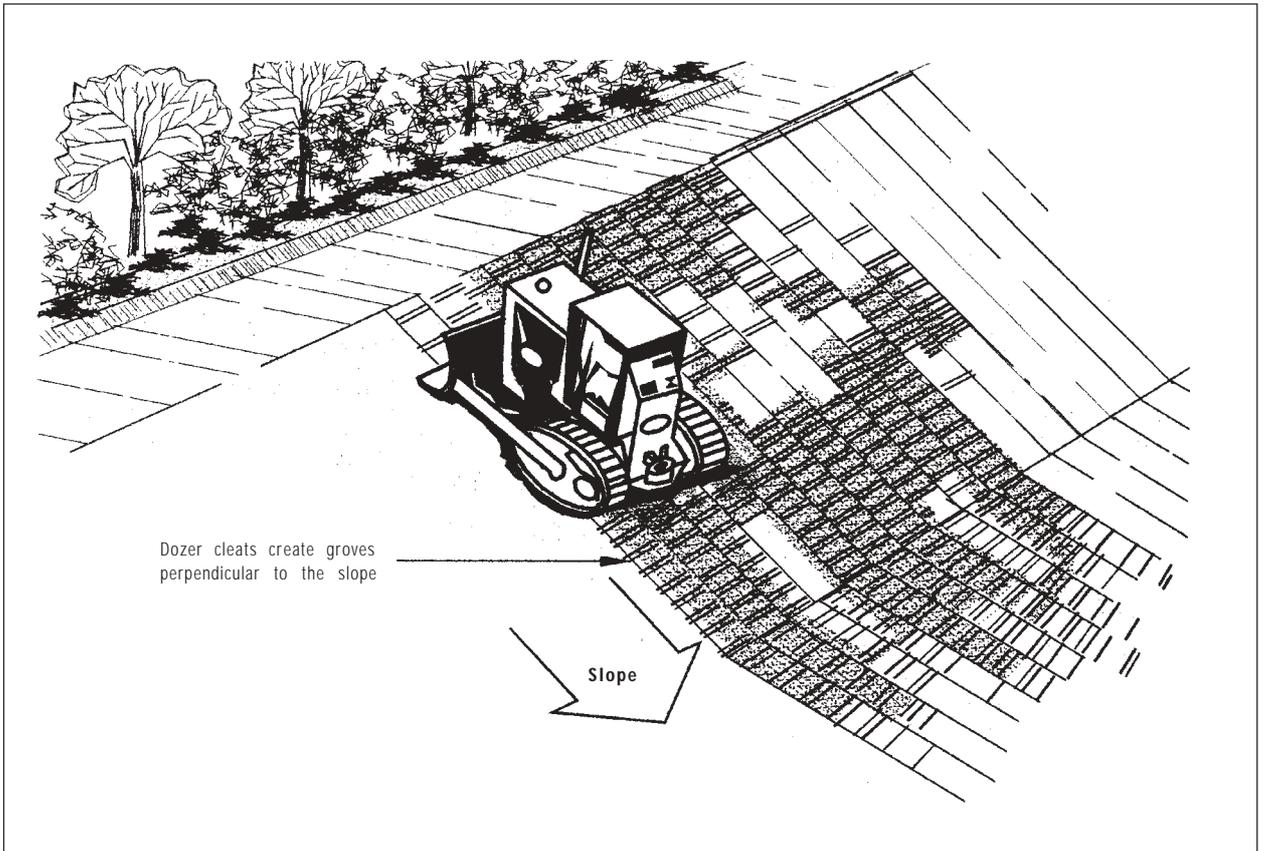

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

2.1 Sediment Retention Pond



Plate 2.1.1 Sediment Retention Pond Showing Decant Systems

Definition

A temporary pond formed by excavation into natural ground or by the construction of an embankment, and incorporating a device to dewater the pond at a rate that will allow suspended sediment to settle out.

Purpose

To treat sediment laden runoff and reduce the volume of sediment leaving a site, thus protecting downstream environments from excessive sedimentation and water quality degradation.

Application

Sediment Retention Ponds are appropriate where treatment of sediment laden runoff is necessary, and are generally considered the appropriate control measure for exposed catchments of more than 0.3 ha. It is vital that the Sediment Retention Pond is maintained until the disturbed area is fully protected against erosion by permanent stabilisation.

The location of the Sediment Retention Pond needs to be carefully considered in terms of the overall project, available room for construction and maintenance and the final location of any permanent stormwater retention facilities that may be constructed at a later stage. Another major consideration is whether drainage works can be routed to the Sediment Retention Pond until such time as the site is fully stabilised. This eliminates the problem of installing and maintaining Stormwater Inlet Protection throughout the latter stages of a development.

The general design approach is to create an impoundment of sufficient volume to capture a significant proportion of the design runoff event, and to provide quiescent (stilling) conditions which promote the settling of suspended sediment. The Sediment Retention Pond design is such that very large runoff events will receive at least partial treatment and smaller runoff events will receive a high level of treatment. To achieve this, the energy of the inlet water needs to be low to minimise re-suspension of sediment and the decant

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

rate of the outlet also needs to be low to minimise water currents and to allow sufficient detention time for the suspended sediment to settle out.

Specific design criteria are discussed below, but can be summarised as the following.

- o Generally use Sediment Retention Ponds for bare areas of bulk earthworks of 0.3 ha or greater.
- o Restrict catchment areas to less than 5.0 ha per Sediment Retention Pond. This limits the length of overland flowpaths and reduces maintenance problems.
- o Locate Sediment Retention Ponds so as to provide a convenient collection point for sediment laden flows from the catchment area. This will require strategic use of cut-offs, Runoff Diversion Channels and Contour Drains.
- o Locate Sediment Retention Ponds to allow access for removing sediment from the pond.
- o Wherever possible, locate Sediment Retention Ponds to allow the spillway to discharge over undisturbed, well vegetated ground.
- o Keep the Sediment Retention Pond life to less than two years. If a longer term is required then further measures to ensure stability and effectiveness are likely to be needed.
- o Do not locate Sediment Retention Ponds within watercourses.
- o Embankment and spillway stability are generally the weak point in Sediment Retention Pond construction. Correct compaction particularly around emergency spillways, discharge pipes and antiseep collars, will keep the system robust.

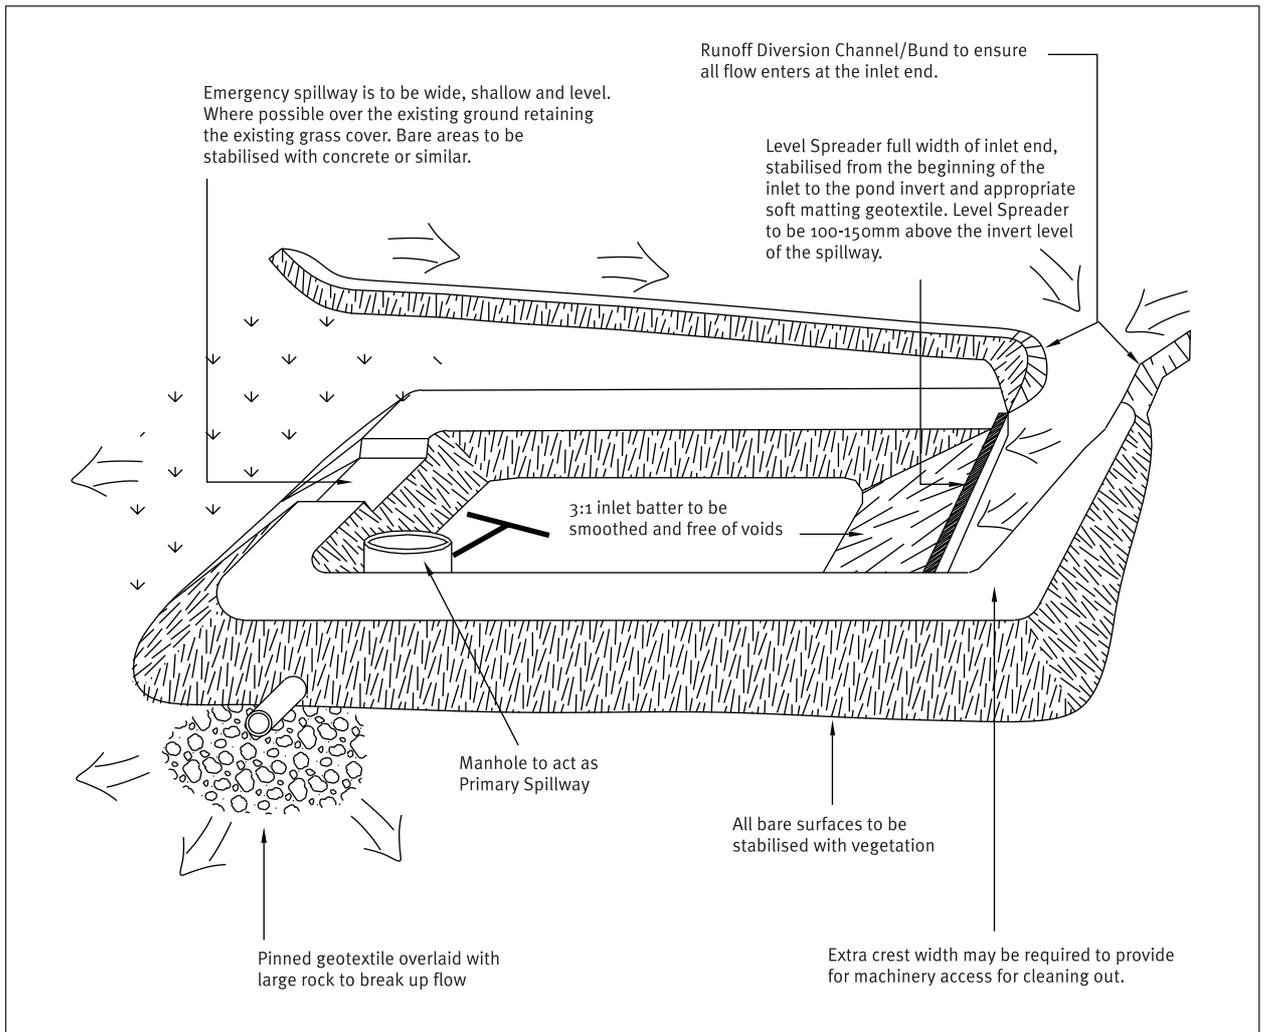


Figure 2.1.1 Sediment Retention Pond

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Design – Size of the Pond

Calculate the volume of the Sediment Retention Pond using the depth measured from the base of the Sediment Retention Pond to the top of the outlet riser. The following design criteria apply.

- On earthwork sites with slopes less than 10% and less than 200m in length, construct a Sediment Retention Pond with a minimum volume of 2% of the contributing catchment (200m³ for each ha of contributing catchment).
- On sites with slopes greater than 10% and/or 200 m in length, construct Sediment Retention Ponds with a minimum volume of 3% of the contributing catchment (300m³ capacity for each ha of contributing catchment).
- The slope angle is determined by that slope immediately above the Sediment Retention Pond or by the average slope angle over the contributing catchment, whichever is the greater.
- For sand soils (less than 8% clay and less than 40% silt) the size of the Sediment Retention Pond may be calculated using the following formula –
 - Pond Surface Area (square metres) = 1.5 x Peak Inflow Rate (litres per second),
 - calculate the inflow rates using the 5% AEP rainfall event. Ensure the Sediment Retention Pond has a minimum depth of 1.0m,
 - alternatively, construct Sediment Retention Ponds with a minimum volume of 1% of the contributing catchment (100 m³ capacity for each ha of contributing catchment).
- On sites that are particularly steep or have sensitive downstream environments, a greater Sediment Retention Pond volume may be required.
- Clean out Sediment Retention Ponds when the volume of sediment accumulated within them reaches 20% of the design volume.
- Clearly show the Sediment Retention Pond dimensions necessary to obtain the required volume, as detailed above, on the site's Erosion and Sediment Control Plan(s).

Design – Dead Storage (Permanent Storage)

- Dead storage is the component of impoundment volume that does not decant and remains in the Sediment Retention Pond. It is important for dissipating the energy of inflows.
- Ensure dead storage is 30% of the total Sediment Retention Pond storage by positioning the lowest decant 0.4 – 0.8m above the invert of the Sediment Retention Pond.
- The approved decant design detailed in these Guidelines allows the lower decant arm to be raised as sediment deposition increases, thereby maintaining the percentage volume of dead storage.

Design – Live Storage (Decant Storage)

- Live storage is the volume between the lowest decant outlet level and the crest of the Sediment Retention Pond primary spillway.
- Ensure that the live storage volume capacity is 70% of the total Sediment Retention Pond storage.
- The approved decant design detailed in these Guidelines allows the decant system to be raised as sediment deposition increases, thereby maintaining the percentage volume of live storage.

Design – Decanting/Outlet Dewatering Device

- Dewater the Sediment Retention Pond so as to remove the relatively clean water without removing any of the settled sediment, and without removing any appreciable quantities of floating debris.
- Various dewatering devices are available, however the Auckland Regional Council prefers the use of a floating T-bar dewatering device, which allows for the decanting of the cleaner surface water from the top of the water column. Substantiated performance design will need to be submitted to the Auckland Regional Council for decant systems other than the floating T-bar dewatering device.
- The recommended decant rate from a Sediment Retention Pond is 3 litres/second/ha of contributing catchment. This rate ensures that appropriate detention times are achieved.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

- A standard T-bar design is detailed in Figure 2.1.5 for various sized catchments. For simplicity, give preference to producing a standard T-bar decant that provides a decant rate of 4.5 litres/second per decant which can be added in discrete increments to accommodate various sized catchments.
- To achieve a decant rate of 4.5 litres/second per decant, drill 6 rows of 10mm diameter holes at 60mm spacings (200 holes) along the 2m long decant arm.
- For catchments of less than 1.5ha, seal off the appropriate number of holes to achieve a 3 litres/second/hectare discharge rate.
- Single T-bar decants must be able to operate through the full live storage depth of the Sediment Retention Pond.
- If two decant systems are required, ensure the lower T-bar decant operates through the full live storage depth of the Sediment Retention Pond. The upper T-bar decant is to operate through the upper 50% of the live storage depth of the Sediment Retention Pond only.
- If three decant systems are to be used, then the lower T-bar decant operates through the full live storage depth and the second T-bar decant through the upper two thirds of live storage depth of the Sediment Retention Pond. The upper T-bar decant operates through the upper one third of live storage depth of the Sediment Retention Pond as detailed in Figure 2.1.4.
- Ensure that the T-bar decant float is securely fastened with steel strapping directly on top of the decant arm and weight it to keep the decant arm submerged just below the surface through all stages of the decant cycle. This will also minimise the potential for blockage of the decant holes by floating debris. The most successful method found to date is to weight the decant arm by strapping a 1.8m long waratah between the float and the decant (approximately 4kg of weight).
- Position the T-bar decant at the correct height by tying 5mm nylon cord through decant holes at either end of the decant arm and fastening it to waratahs driven in on either side of the decant.
- Lay the discharge pipe at a 1 – 2% gradient, compact the fill material around it using a machine compactor and incorporate anti-seep collars with the following criteria:
 - install collars around the pipe to increase the seepage length along the pipe with a spacing of approximately 10m;
 - the vertical projection of each collar is 1.0m; ensure all anti seep collars and their connections are watertight.
 - Use a flexible thick rubber coupling to provide a connection between the decant arm and the primary spillway or discharge pipe. To provide sufficient flexibility (such as is required for the lower decant arm) install two couplings. Fasten the flexible coupling using strap clamps and glue.
 - Where a concrete riser decant system is utilised, ensure the lower decant connection is positioned on an angle upwards from the horizontal so as to split the operational angle that the decant works through. This will reduce the deformation force on the coupling used.

Design – Shape of the Pond

- Ensure the length to width ratio of the Sediment Retention Pond is no less than 3:1 and no greater than 5:1. The length of the Sediment Retention Pond is measured as the distance between the inlet and the outlet (decant system). A 2:1 ratio may be used if the pond depth is no greater than 1.0m.
- Maximise the distance between the inlet and the outlet (including the emergency spillway) to reduce the risk of short circuiting and to promote quiescent conditions. If this can not be achieved by correctly positioning the inlet and outlets, install baffles to achieve the appropriate length to width ratio design.
- Ensure that the Sediment Retention Pond has a level invert as described below to promote the even and gradual dissipation of the heavier inflow water across the full area of the Sediment Retention Pond.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Design – Level Spreader

- Incorporate a Level Spreader into the inlet design to spread inflow velocities, thereby allowing rapid dissipation of inflow energies. Combine the Level Spreader with a well compacted and smoothed inlet batter (no steeper than a 3:1 gradient), stabilised over its entire area. The essential design feature is to ensure the Level Spreader is level, non-erodible and spans the full width of the Sediment Retention Pond.
- To ensure even inflows, install a trenched and pegged 150mm x 50mm timber weir or similar across the full width of the inlet. Bund the edges with compacted earth to prevent outflanking. This timber weir also serves to toe in any geotextile protection which may be required. Sediment accumulated behind the Level Spreader may require periodic removal.
- Position the top of the Level Spreader weir 100 – 200 mm above the invert of the emergency spillway.

- The shape of the Level Spreader will vary with the direction and volume of the inlet diversion, but the entrance to the Level Spreader must be widened and flared to promote even flow, as in Part B, Section 1.10 of these Guidelines.

Design – Baffles

- Incorporate baffles in the Sediment Retention Pond design where the recommended pond shape cannot be achieved. Extend baffles the full depth of the Sediment Retention Pond and place them to maximise dissipation of flow energy.
- Generally, baffles are in the form of a wing to direct inflows away from the outlet and maximise the stilling zone. A series of compartments within the pond can be used to achieve this, although care must be taken to avoid creating in-pond currents and resuspension of light particulates.



Plate 2.1.2 Sediment Retention Pond Showing Baffle to Lengthen Flowpath and Create Correct Length:Width Ratio

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

- Baffles may be constructed from various materials ranging from solid shutter boards to braced geotextile curtains.

Design – Depth of Pond

- Sediment Retention Pond depths may be 1 – 2m deep, but no deeper than 2m. Deeper ponds are more likely to cause short circuiting problems during larger storm events and require specifically designed floating decant systems.
- The decant design in these Guidelines operates through a maximum live storage range of 1.5m.

Design – Embankment

- Before building a Sediment Retention Pond, install sediment controls such as Silt Fences below the construction area and maintain them to a functional standard until the Sediment Retention Pond batters are fully stabilised.
- Thoroughly compact the Sediment Retention Pond embankment, with material laid in 150 mm layers and compacted to engineering standards.
- Where possible install the discharge pipes through the embankment as the embankment is being constructed.
- Fully stabilise the external batter face, by vegetative or other means, immediately after construction.
- Ensure all bare areas associated with the Sediment Retention Pond (including internal batters) are stabilised with vegetation if the Sediment Retention Pond is to remain in place over winter.

Design – Primary Spillway

- For larger catchments (greater than 1.5ha) the Sediment Retention Pond requires a piped primary spillway (refer Figures 2.1.3 and 2.1.4).
- For catchments up to 1.5ha, decant flows can be piped using the same diameter piping as the decant system (100mm PVC smooth bore) directly through the Sediment Retention Pond wall to discharge beyond the toe of the Sediment Retention Pond wall.
- For contributing catchments between 1.5 and 3ha in area, use a discharge and primary spillway pipe diameter of 150mm.

- Where contributing catchments are 3ha or greater and/or the long term stability of the Sediment Retention Pond emergency spillway is questionable (for example, built in fill) then consideration should be given to incorporating a concrete manhole riser and larger diameter pipe outlet as a primary spillway sufficient to accommodate the 5% AEP rainfall event.
- If the Sediment Retention Pond is to operate over the winter and the contributing catchment is fully stabilised, disconnect the T-bar decant to reduce the frequency of emergency spillway activation and consequent erosion.
- Where a primary spillway upstand riser is used, place the top of the riser a minimum 600mm lower than the top of the Sediment Retention Pond embankment and a minimum 300mm lower than the emergency spillway crest. Ensure the riser and the discharge pipe connections are all completely watertight.
- Where possible, install the piping through the embankment as the embankment is being constructed.

Design – Emergency Spillway

- An emergency spillway is essential for all Sediment Retention Ponds.
- Emergency spillways must be capable of accommodating the 1% AEP event without eroding.
- The outer emergency spillway crest and batter requires a very high standard of stabilisation with the fill material of the spillway batter well compacted.
- Construct the emergency spillway as a stabilised trapezoidal cross section with a minimum bottom width of 6m or the width of the pond floor, whichever is the greater.
- When utilising geotextile for emergency spillway stabilisation purposes, the batter face must be smooth and all voids eliminated.
- If geotextile is used, a soft needle punch geotextile is laid first and then covered with a strong woven low permeability geotextile. Ensure the geotextile is pinned at 0.5m centres over the full area of the emergency spillway.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

- Where possible, construct emergency spillways in well vegetated, undisturbed ground (not fill) and discharge over long grass.
- If the emergency spillway is constructed on bare soil, provide complete erosion protection by means such as grouted riprap, asphalt, erosion matting/geotextile or concrete.
- Construct the emergency spillway with a minimum of 300mm freeboard height above the primary spillway.

Construction Specifications

- Construct a fabric silt fence across the downslope end of the proposed works.
- Clear areas under proposed fills of topsoil or other unsuitable material down to competent material. Large fill embankments may need to be keyed in.
- Use only approved fill.
- Place and compact fill in layers as per the engineer's specifications.
- Do not place pervious materials such as sand or gravel within the fill material.
- Construct fill embankments approximately 10% higher than the design height to allow for settlement of the material. Install appropriate pipe work and antiseep collars during the construction of the embankment and compact around these appropriately.
- Install the emergency spillway.
- Install and stabilise the Level Spreader.
- Securely attach the decant system to the horizontal pipework. Make all connections watertight. Place any manhole riser on a firm foundation of impervious soil.
- Do not place pervious material such as sand or scoria around the discharge pipe or the antiseep collars.
- Install baffles if required.
- Check Sediment Retention Pond freeboard for differential settlement and rectify as necessary.

- Stabilise both internal and external batters with vegetation and the emergency spillway in accordance with the site's approved Erosion and Sediment Control Plan.

Pond Maintenance and Disposal of Sediment

- Clean out Sediment Retention Ponds before the volume of accumulated sediment reaches 20% of the total Sediment Retention Pond volume. To assist in gauging sediment loads, clearly mark the 20% volume height on the decant riser.
- Clean out Sediment Retention Ponds with high capacity sludge pumps, or with excavators (long reach excavators if needed) loading onto sealed tip trucks or to a secure area.
- The Erosion and Sediment Control Plan should identify disposal locations for the sediment removed from the Sediment Retention Pond. Deposit the sediment in such a location so that it does not lead to a direct discharge to receiving environments. Stabilise all disposal sites as required and approved in the site's Erosion and Sediment Control Plan.
- Inspect Sediment Retention Ponds every day and before every forecasted rainfall event. Inspect for correct operation after every runoff event. Immediately repair any damage to Sediment Retention Ponds caused by erosion or construction equipment.

Safety

Sediment Retention Ponds are attractive to children and can become safety hazards if not appropriately fenced and if safety rules are not followed. Low gradient pond batters provide an additional safety measure. Check the safety requirements of the City or District Council Authority and the Occupational Safety and Health branch of the Department of Labour.

Chemical Treatment

Some chemicals can be used successfully to promote flocculation (clumping together) of suspended solids in the Sediment Retention Pond to increase the particle mass and speed the rate of settling.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Recent trials have identified a simple and effective chemical dosing system that does not require a power supply. This system uses poly aluminium chloride (PAC) and has been found to be particularly effective in settling fine particulate such as fine silts and clays. Other chemicals may become available as more trial data is obtained.

Chemical dosing systems are likely to be required where the design Sediment Retention Pond volume cannot be achieved because of site constraints and/or where a high level of treatment is required because of the sensitivity of the receiving environment. Chemical treatment is also more likely to be required where the clay component is high or where the cumulative effects of sediment discharge are significant.

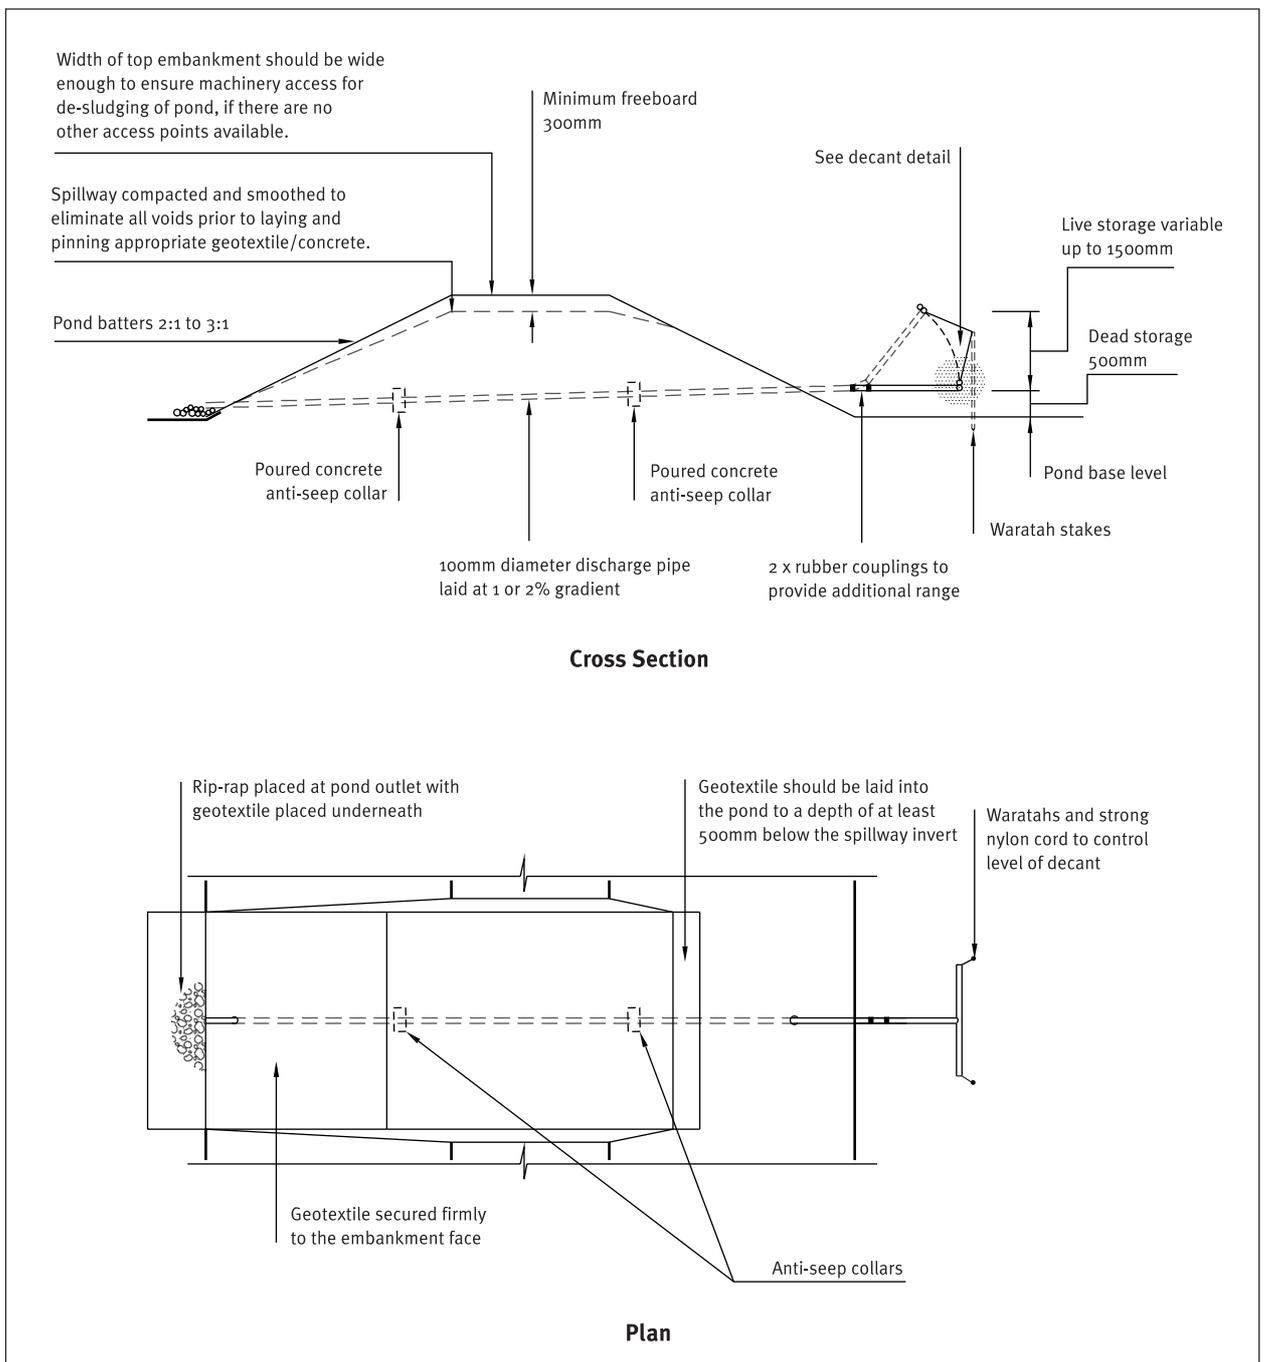


Figure 2.1.2 Sediment Retention Pond for Catchments up to 1.5 ha

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

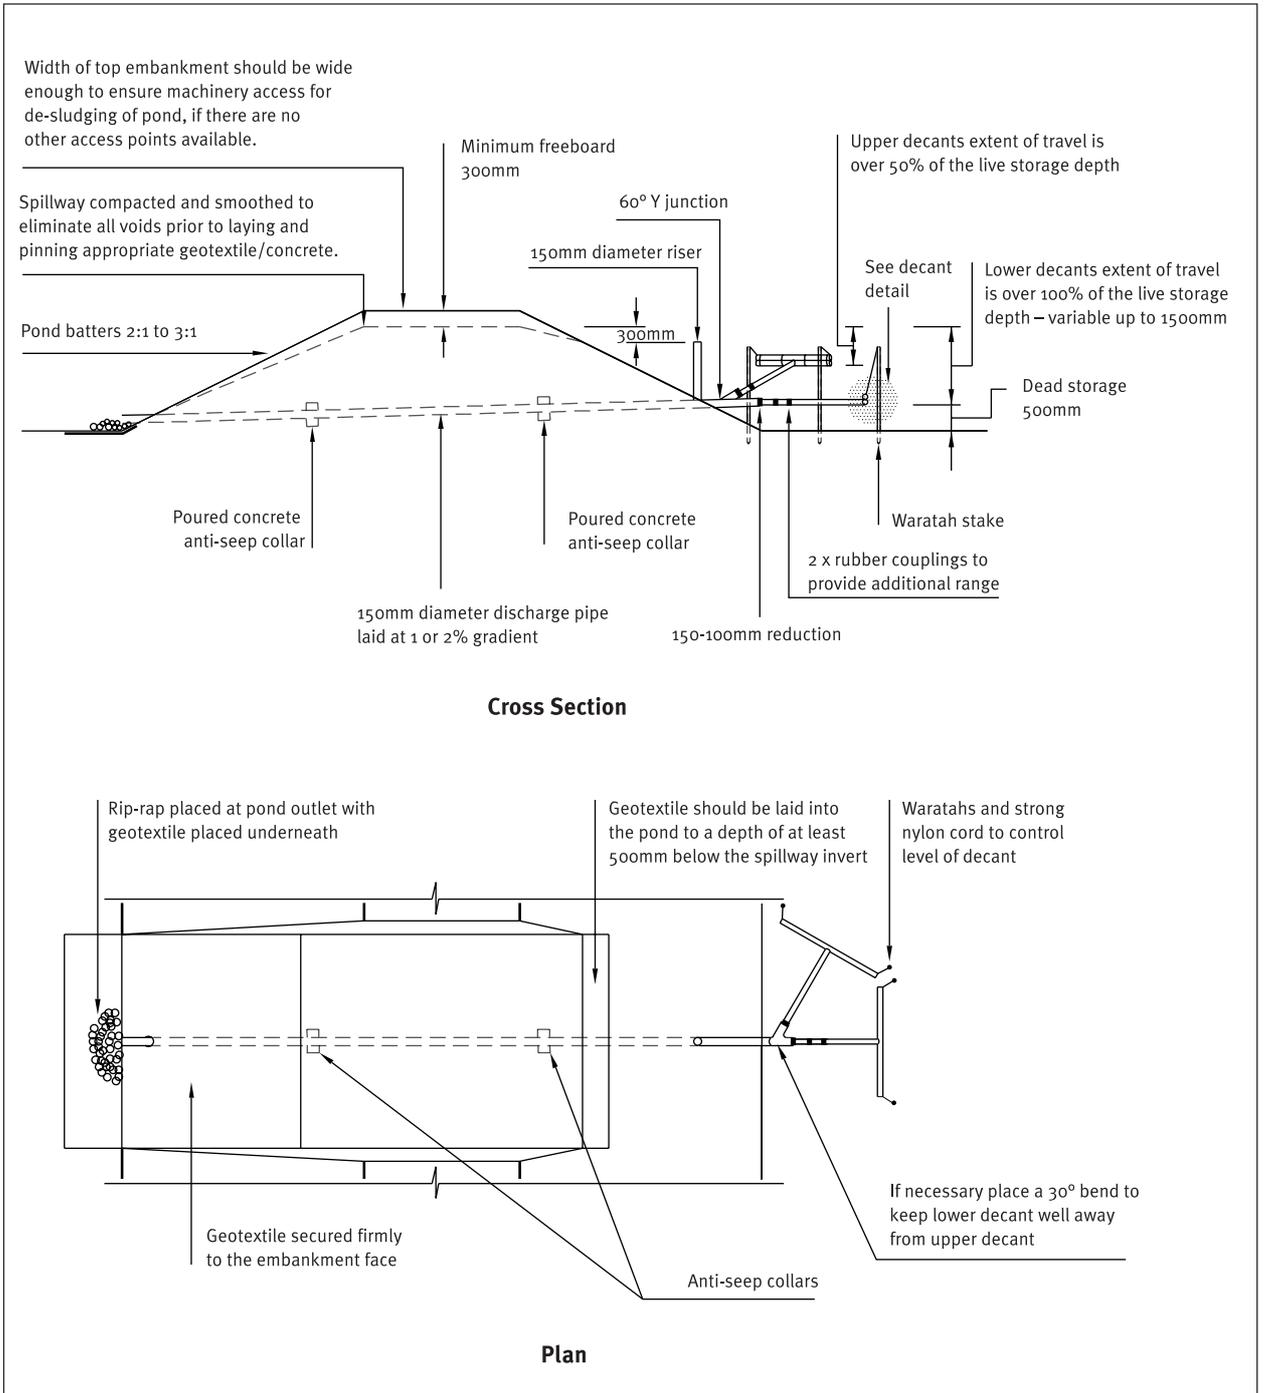


Figure 2.1.3 Sediment Retention Pond for Catchments Between 1.5 and 3 ha

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

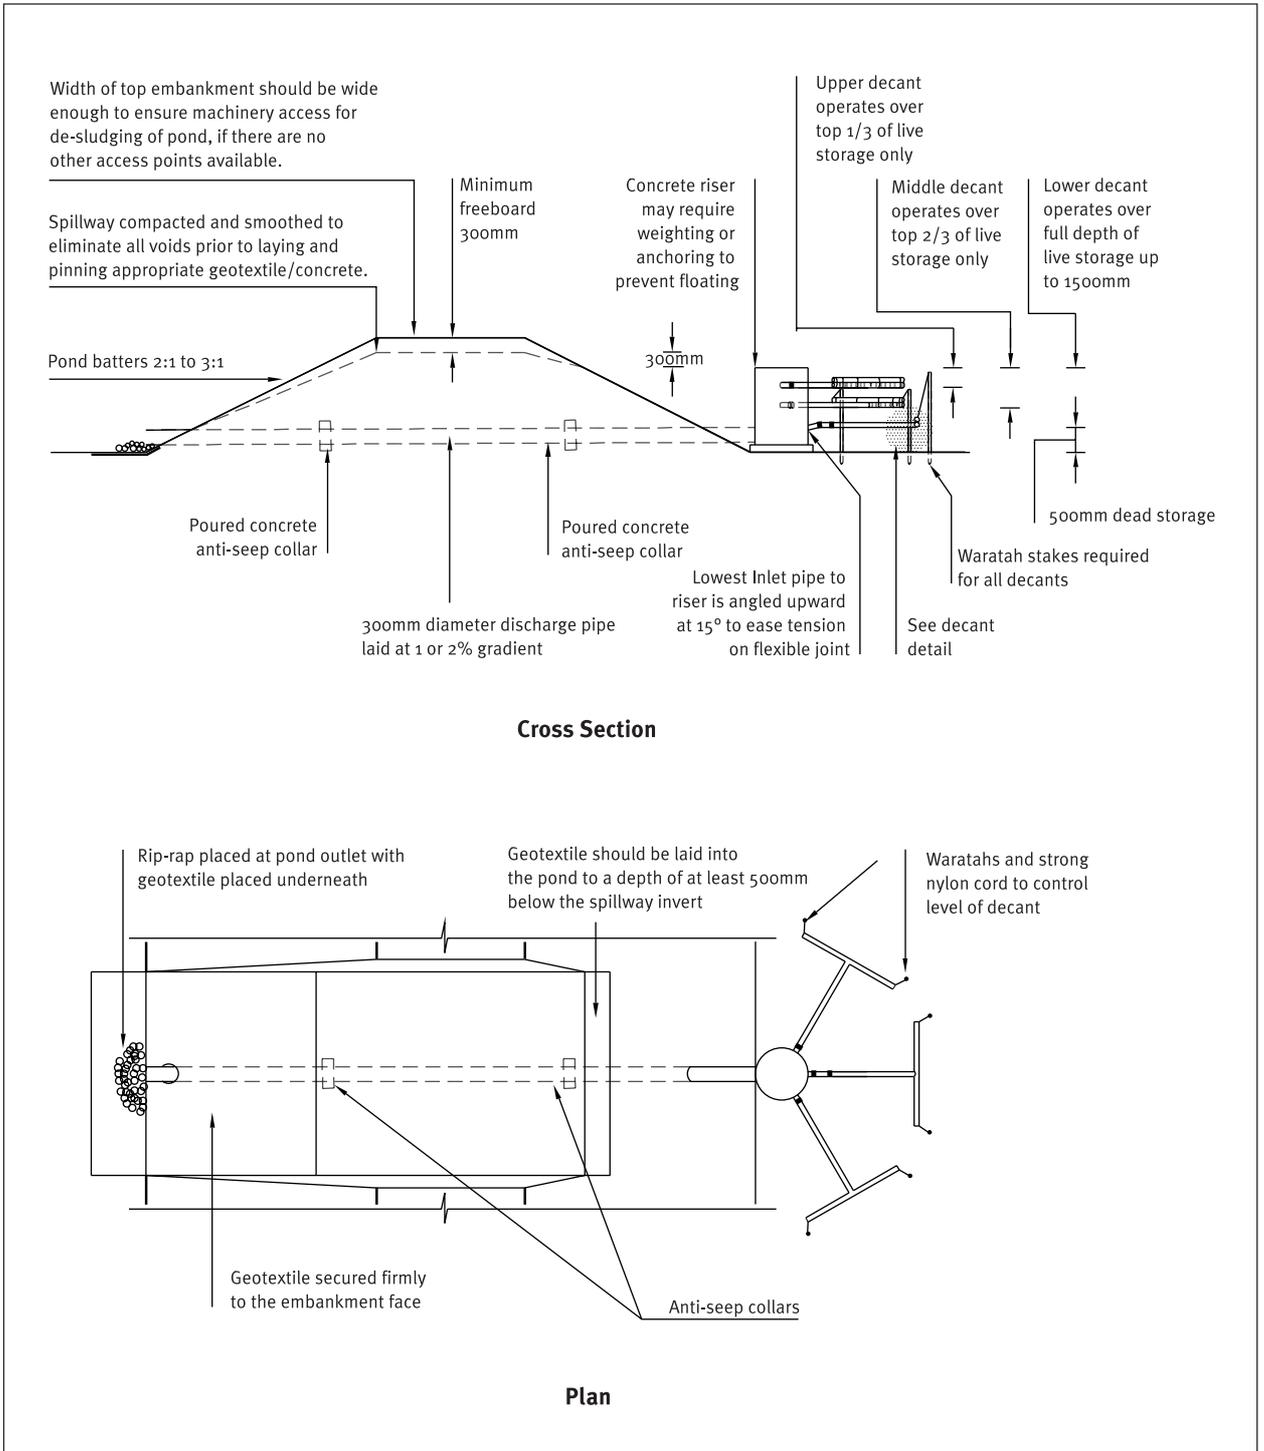


Figure 2.1.4 Sediment Retention Pond for Catchments Between 3 and 5 ha

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

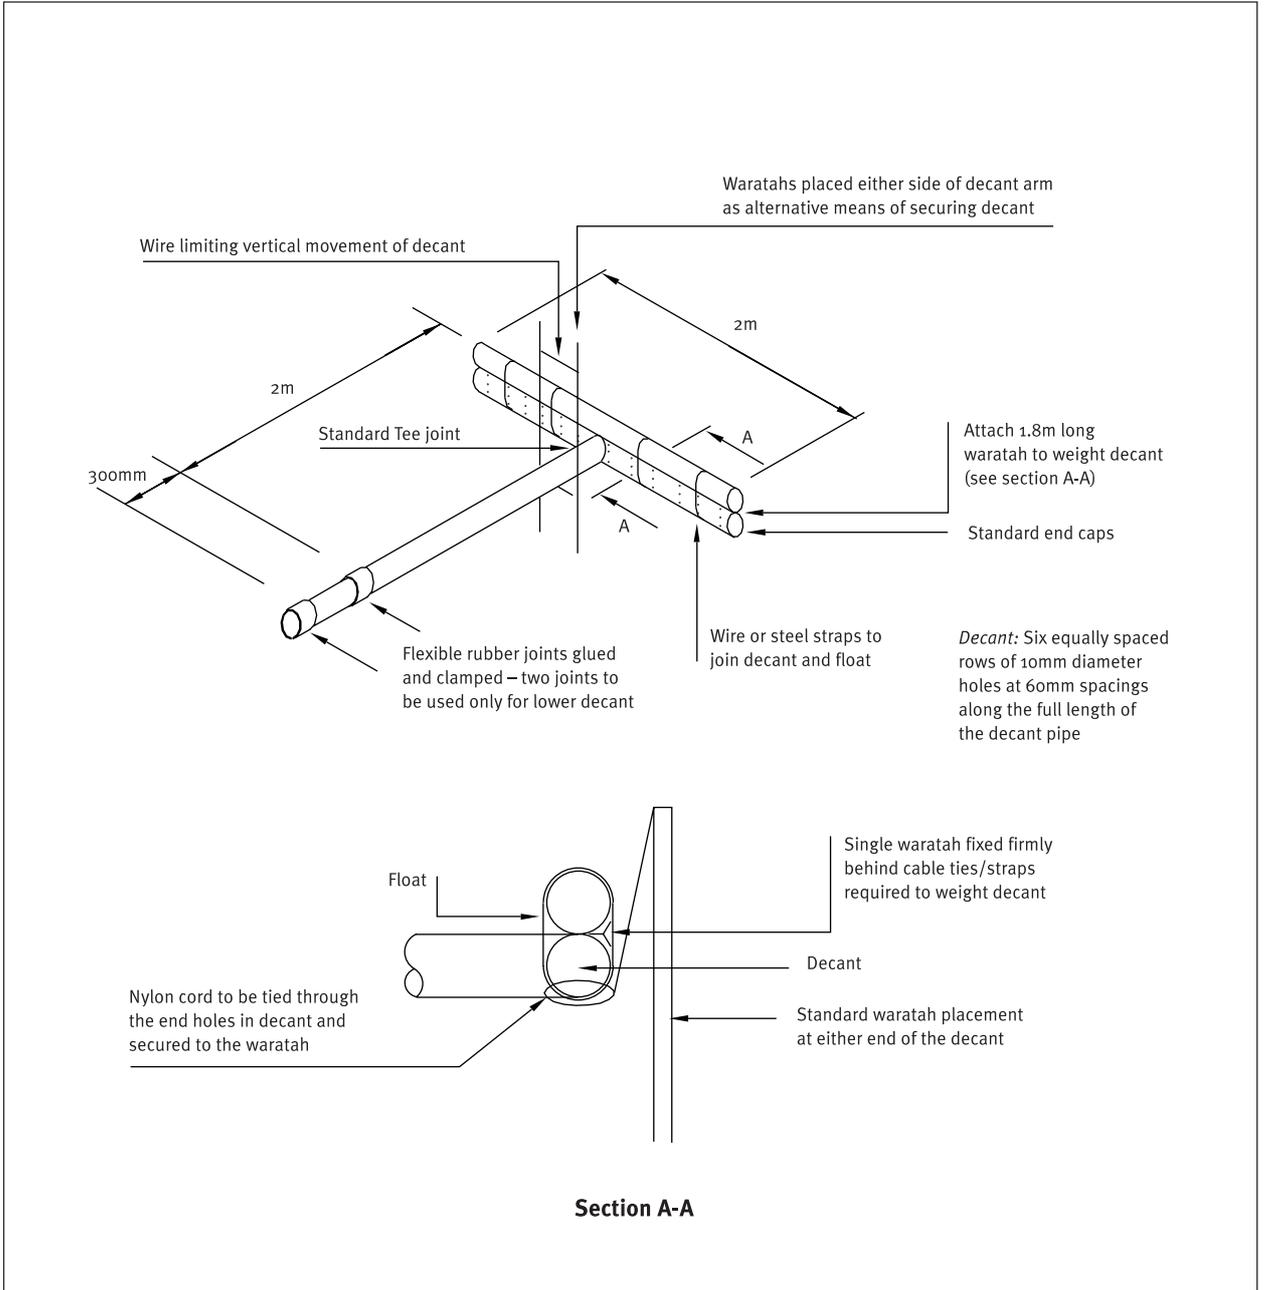


Figure 2.1.5 Sediment Retention Pond – Decant Detail

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

2.2 Silt Fence



Plate 2.2 Silt Fence

Definition

A temporary barrier of woven geotextile fabric used to intercept runoff, reduce its velocity and impound sediment laden runoff from small areas of disturbed soil.

Purpose

To detain flows from runoff so that deposition of transported sediment can occur through settlement. Silt fences can only be used to intercept sheet flow. Do not use them as velocity checks in channels or place them where they will intercept concentrated flow.

Application

- On low gradient sites or for confined areas where the contributing catchment is small, such as short steep batter fills and around watercourses.
- To delineate the limit of disturbance on an earthworks site such as riparian areas or bush reserves.

- To store runoff behind the Silt Fence without damaging the fence or the submerged area behind the fence.
- Do not install Silt Fences across watercourses or in areas of concentrated flows.

Design

- Ensure Silt Fence height is a minimum of 400mm above ground level.
- Place supporting posts/waratahs for Silt Fences no more than 2m apart unless additional support is provided by tensioned wire (2.5mm HT) along the top of the Silt Fence. Where a strong woven fabric is used in conjunction with a wire support, the distance between posts can be extended up to 4m. Double the Silt Fence fabric over and fasten to the wire and posts with wire ties or cloth fastening clips at 150mm spacings. Ensure supporting posts/waratahs are embedded a minimum of 400mm into the ground.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

- o Always install Silt Fences along the contour. Where this is not possible or where there are long sections of Silt Fence, install short Silt Fence returns projecting upslope from the Silt Fence to minimise concentration of flows. Silt Fence returns are a minimum 2m in length, can incorporate a tie back and are generally constructed by continuing the Silt Fence around the return and doubling back, eliminating joins.
- o Join lengths of Silt Fence by doubling over fabric ends around a wooden post or batten or by stapling the fabric ends to a batten and butting the two battens together as shown in Figure 2.2.
- o Maximum slope lengths, spacing of returns and angles for Silt Fences are shown in Table 2.2.
- o Install Silt Fence wings at either end of the Silt Fence projecting upslope to a sufficient height to prevent outflanking.
- o Where impounded flow may overtop the Silt Fence, crossing natural depressions or low points, make provision for a riprap splash pad or other outlet protection device.
- o Use of Silt Fences in catchments of more than 0.5ha requires careful consideration of specific site measures, and other control measures may be better, such as Super Silt Fence.
- o Where water may pond behind the Silt Fence, provide extra support for the Silt Fence with tie backs from the Silt Fence to a central stable point on the upward side. Extra support can also be provided by stringing wire between support stakes and connecting the filter fabric to this wire.
- o The fabric cloth must meet the following requirements for Geotextile fabric.
 - Tension Strength: 0.345 pa (minimum)
 - Tensile Modulus: 0.140 pa (minimum)
 - Apparent Opening Size 100 mm

Table 2.2 Silt Fence Design Criteria

Slope Steepness %	Slope Length (o) (Maximum)	Spacing of Returns (o)	Silt Fence Length (o) (Maximum)
Flatter than 2%	Unlimited	N/A	Unlimited
2 – 10%	40	60	300
10 – 20%	30	50	230
20 – 33%	20	40	150
33 – 50%	15	30	75
> 50%	6	20	40

Construction Specifications

- o Use Silt Fence material appropriate to the site conditions and in accordance with the manufacturer's specifications.
- o Excavate a trench a minimum of 100mm wide and 200mm deep along the proposed line of the Silt Fence. Install the support posts on the downslope edge of the trench and Silt Fence fabric on the upslope side of the support posts to the full depth of the trench, then backfill the trench with compacted soil.
- o Use supporting posts of tanalised timber a minimum of 50mm square, or steel waratahs at least 1.5m in length.
- o Reinforce the top of the Silt Fence fabric with a wire support made of galvanised wire of a minimum diameter of 2.5mm. Tension the wire using permanent wire strainers attached to angled waratahs at the end of the Silt Fence.
- o Where ends of Silt Fence fabric come together, ensure they are overlapped, folded and stapled to prevent sediment bypass.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Maintenance

- o Inspect Silt Fences at least once a week and after each rainfall. Make any necessary repairs when bulges occur or when sediment accumulation reaches 50% of the fabric height.
- o Any areas of collapse, decomposition or ineffectiveness need to be immediately replaced.
- o Remove sediment deposits as necessary to continue to allow for adequate sediment storage and reduce pressure on the Silt Fence. Ensure that the sediment is removed to a secure area.
- o Do not remove Silt Fence materials and sediment deposition until the catchment area has been appropriately stabilised. Stabilise the area of the removed Silt Fence.

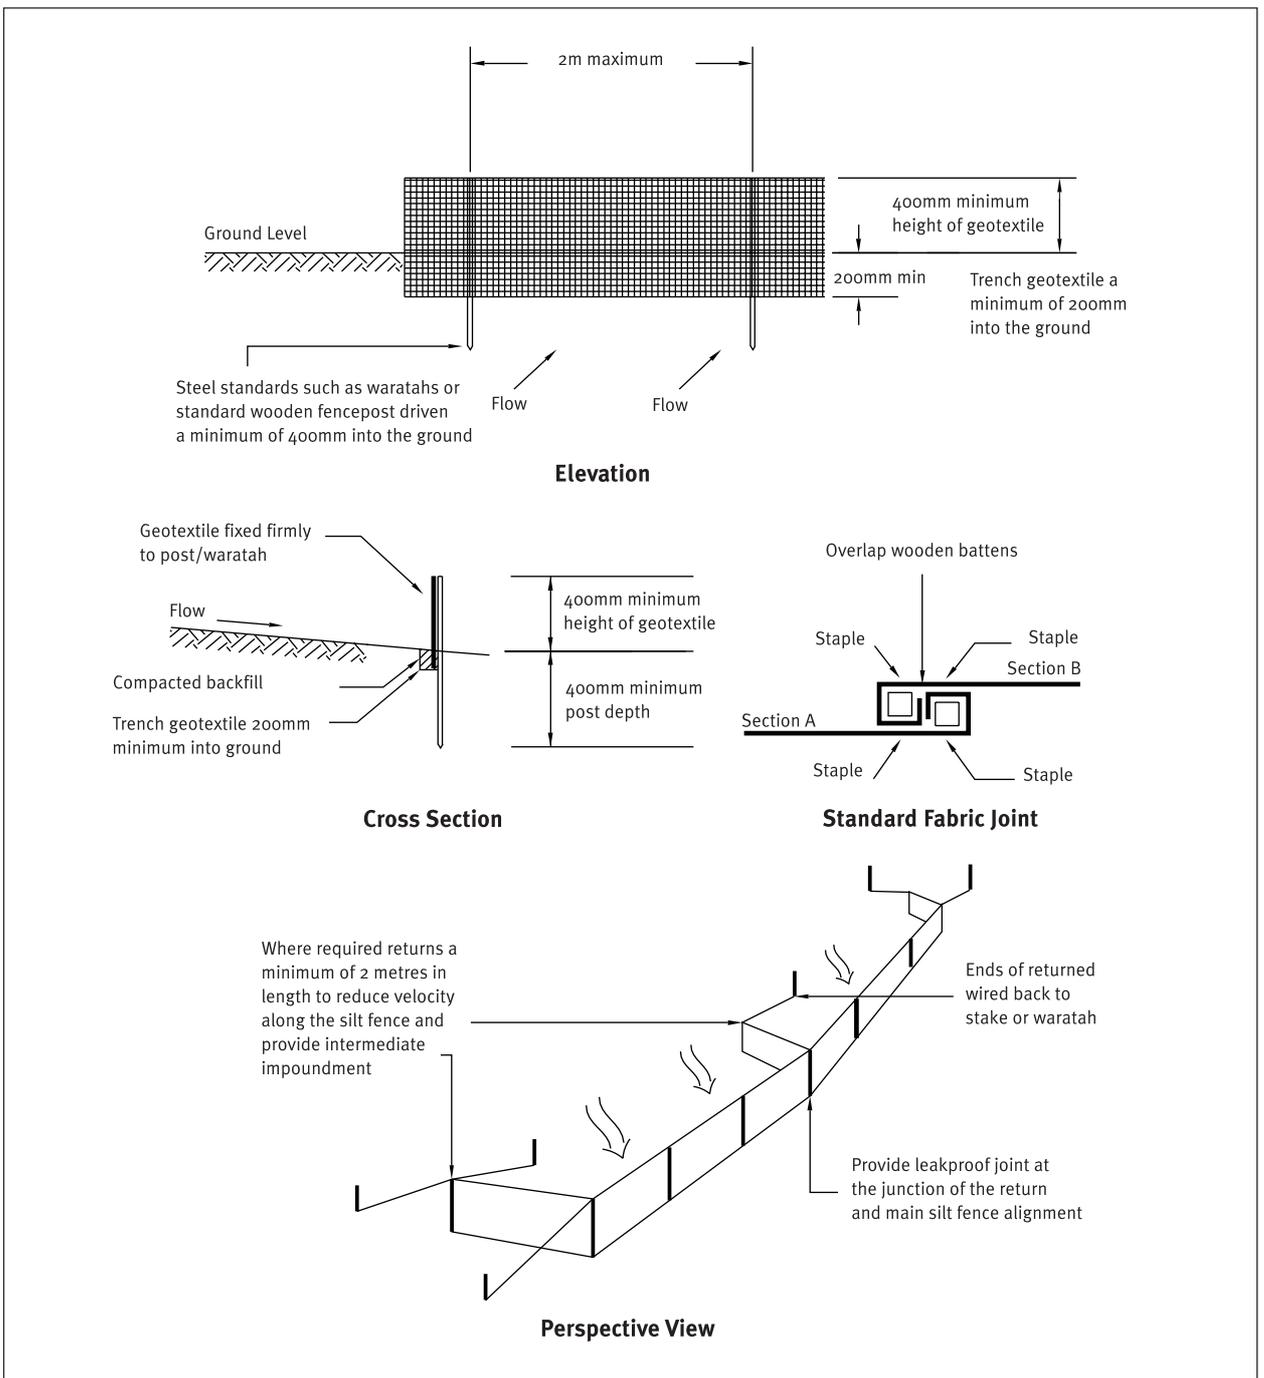


Figure 2.2 Silt Fence

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

2.3 Super Silt Fence

—SSF—



Plate 2.3 Super Silt Fence

Definition

A temporary barrier of geotextile fabric over chain link fence that is used to intercept flows, reduce their velocity and impound sediment-laden runoff from small catchment areas.

Purpose

To reduce runoff velocity and allow the deposition of transported sediment to occur.

A Super Silt Fence provides much more robust sediment control than a standard Silt Fence and allows up to four times the catchment area to be treated by an equivalent length of standard Silt Fence.

Application

- o Provides a barrier that can collect and hold debris and soil, preventing the material from entering critical areas, watercourses and streets.
- o Can be used where the installation of an Earth or Topsoil Bund would destroy sensitive areas such as bush and wetlands.

- o Should be placed as close to the contour as possible. No section of the fence should exceed a grade of 5% for a distance of more than 15m.

Design

When considering Super Silt Fence installation for larger catchments (greater than 0.5ha) as in Table 2.3, carefully consider the specific site conditions and other alternative control measures available. Base the length of the Super Silt Fence is based on the limits shown in Table 2.3.

Limits imposed by ultraviolet light affect the stability of the fabric and will dictate the maximum period that the Super Silt Fence may be used.

Where ends of the geotextile fabric come together, overlap, fold and staple the fabric ends to prevent sediment bypass.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Table 2.3 Super Silt Fence Design Criteria

Slope %	Slope Length (o) (maximum)	Super Silt Fence Length (o) (maximum)
0 – 10	Unlimited	Unlimited
10 – 20	60	450
20 – 33	30	300
33 – 50	30	150
> 50	15	75

Construction Specifications

- o Use a Silt Fence fabric that is appropriate to the site conditions and fits the manufacturer's specifications.
- o Excavate a trench 100mm wide by 200mm deep along the line of the Super Silt Fence.
- o Position the posts (No. 3 rounds, No. 2 half rounds or waratahs) at no greater than 3 o centres on the downslope side of the trench. While there is no need to set the posts in concrete, ensure the 1.8m long posts are driven to an appropriate depth (1m minimum).
- o Install tensioned galvanised wire (2.5 mmHT) at 400mm and again at 800mm above ground level using permanent wire strainers.
- o Secure chain link fence to the fence posts with wire ties or staples, ensuring the chain link fence goes to the base of the trench.
- o Fasten two layers of geotextile fabric securely to the Super Silt Fence with ties spaced every 60cm at the top and mid section of the Super Silt Fence.
- o Place the two layers of geotextile fabric to the base of the trench (a minimum of 200mm into the ground) and place compacted backfill back to the original ground level.
- o When two sections of geotextile fabric adjoin each other, ensure they are doubled over a minimum of 300mm, wrapped around a batten and stapled at 75mm spacings to prevent sediment bypass.
- o The geotextile fabric must meet the following requirements:

Tension Strength	0.345 pa (minimum)
Tensile Modulus	0.140 pa (minimum)
Apparent Opening Size	100 – 500 mm

Maintenance

- Inspect regularly and before and after storm events.
- Undertake maintenance as needed and remove silt buildups when bulges develop in the Super Silt Fence or when sediment deposition reaches 50% of the Super Silt Fence height.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

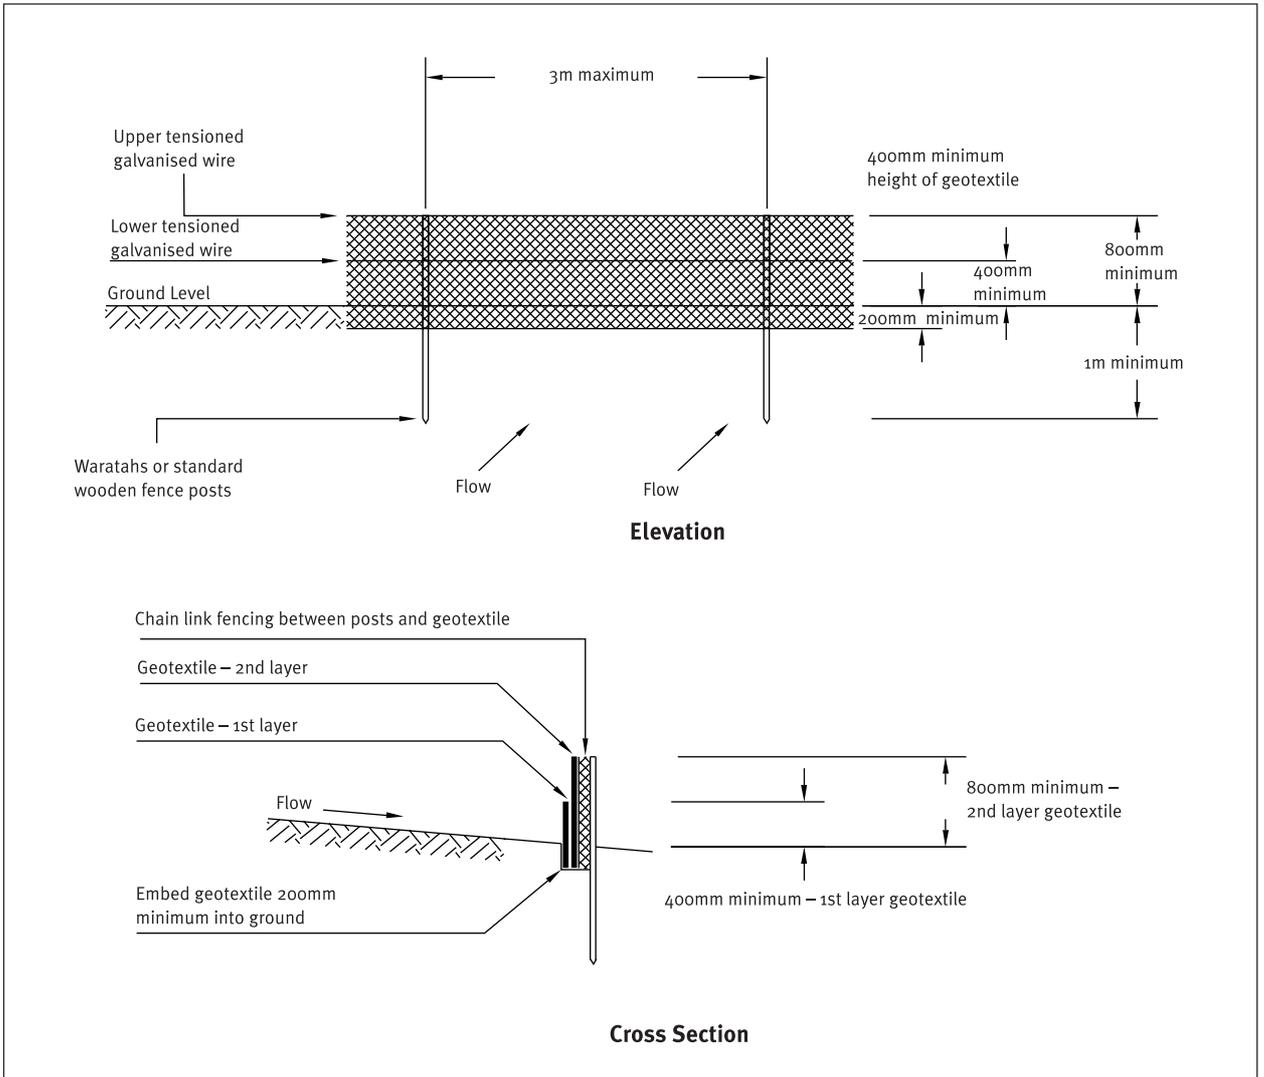


Figure 2.3 Super Silt Fence

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

2.4 Hay Bale Barrier

→ HB →



Plate 2.4 Hay Bale Barrier

Definition

Temporary barriers of hay bales used to intercept and direct surface runoff from small areas.

Purpose

To intercept or direct sediment laden runoff from small areas to a sediment retention facility so that deposition of transported sediment can occur. Hay Bale Barriers do not filter sediment.

Application

- o Hay Bale Barriers are not primary sediment control measures. They easily deteriorate and require frequent maintenance.
- o Only use Hay Bale Barriers to meet short term needs of less than one month duration.

- o Only use Hay Bale Barriers to intercept sheet flow. Do not use them as velocity checks in channels or place them where they will intercept concentrated flow. They do not act as filters and are easily overtopped or scoured out.
- o Do not use with a catchment area of more than 0.2ha per 100 o length of haybales.
- o Do not use Hay Bale Barriers on slopes exceeding 20%.

Design

Not Applicable.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Construction Specifications

- o Place Hay Bale Barriers along the contour with bales in a row with the ends tightly abutting adjacent bales.
- o Dig each bale into the ground 100mm and place so the bale bindings are horizontal.
- o Do not place bales more than one bale high.
- o Secure bales in place by two stakes driven through the bale 300 to 400mm into the ground. Drive the first stake toward the previously laid bale at an angle to force the bales together. Drive stakes flush with the top of the bale.

Maintenance

- Inspect Hay Bale Barriers frequently and after each rain event. Undertake maintenance as necessary.
- Remove all bales when the site has been fully stabilised.
- Stabilise the trench where the bales were located and grade flush.

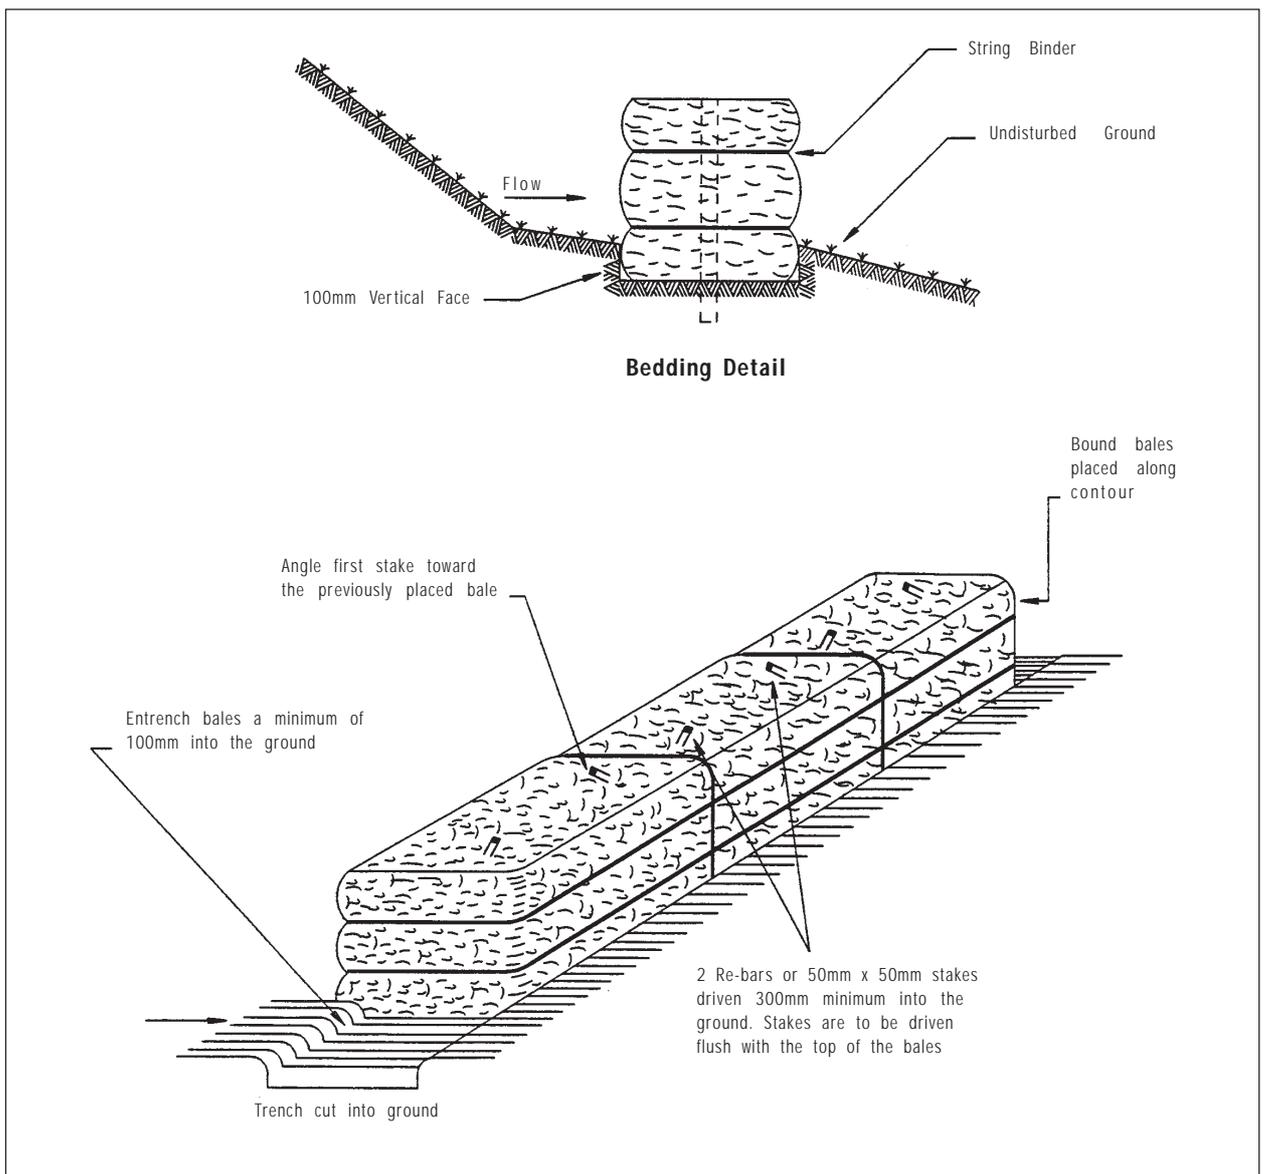


Figure 2.4 Hay Bale Barrier

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

2.5 Stormwater Inlet Protection



Plate 2.5 Stormwater Inlet Protection

Definition

A barrier across or around a cesspit (stormwater inlet).

Purpose

To intercept and filter sediment-laden runoff before it enters a reticulated stormwater system via a cesspit, thereby preventing sediment-laden flows from entering receiving environments. The protection may take various forms depending upon the type of inlet to be protected. Stormwater Protection is a secondary sediment control device. It must only be used in conjunction with other erosion and sediment control measures.

If good erosion and sediment control measures are in place on the site, then Stormwater Inlet Protection will not be required.

Application

- o Do not use Stormwater Inlet Protection as a primary method of treatment instead of other sediment retention facilities.
- o Use only in small catchments of less than 0.5 ha.
- o Use only where the catchment area to an inlet is disturbed and it is not possible to temporarily divert the storm drain outfall into a sediment retention facility.

Stormwater Inlet Protection only offers limited treatment of sediment-laden water, because of the concentrated flows arriving at them. Stormwater systems are, by design, very efficient at conducting flows away from inlets, and therefore, once any sediment reaches the stormwater system, it will be discharged directly to the receiving environment.

Therefore, the need to use Stormwater Inlet Protection can indicate poor erosion and sediment control and/or inadequate stabilisation on the site.

Design

There are various design options for reducing sediment inputs to the stormwater cesspits.

Silt Fence Design

A Silt Fence can be erected around the inlet (see Part B Section 2.2). This method is appropriate where cesspits have been connected to a stormwater system and are collecting runoff from disturbed soil surfaces.

Filter Media Design

Two common methods use geotextile and scoria or gravel to treat sediment laden flows. All points where runoff can enter the cesspit must be protected with suitable geotextile fabric.

- o Wrap geotextile fabric around the cesspit grate as a barrier to flow directly from the roadside gutter. Pay special attention to the inlet above the grate back of the cesspit where a geotextile fabric sock filled with gravel must be placed to intercept runoff.
- o Lay coarse geotextile fabric over the cesspit and up onto the kerb with a layer of aggregate material to act as a primary filter and to hold the fabric in

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

place.

Check Dams

Place a series of low sandbag check dams up the gutter from cesspits to act as a series of sediment traps. The checkdams require a spillway lower than the kerb to ensure that runoff does not encroach onto the berm area and cause scouring. Construct checkdams out of up to six sandbags laid end to end with no gaps in an arc away from the kerb and up the road to create a series of impoundment areas.

Excavated Inlet Protection

Excavating around a stormwater inlet creates storage capacity where suspended material can settle out. Ensure that seepage holes allow for filtered dewatering, and that the capacity provided around the inlet for storage is a minimum of 1% of the catchment (1m³ of capacity per 100 m² of contributing catchment).


Maintenance

Maintenance requirements for cesspit protection measures are high because they clog easily. When clogging occurs, remove accumulated sediment and clean or replace the geotextile fabric and aggregate.

Inspect all Stormwater Inlet Protection measures following any rainfall event and maintain as necessary to ensure they operate effectively.

Stormwater Inlet Protection provides at best limited sediment retention. Do not use it as a primary method of sediment control. Use additional measures up-slope, such as topsoil bunds and cut-off drains, to minimise the volume of sediment reaching any stormwater inlets. Cesspits must at all times remain able to convey flow from the site to prevent large concentrated highly erosive flows from building up and causing washouts in secondary overland paths.

Construction Specifications

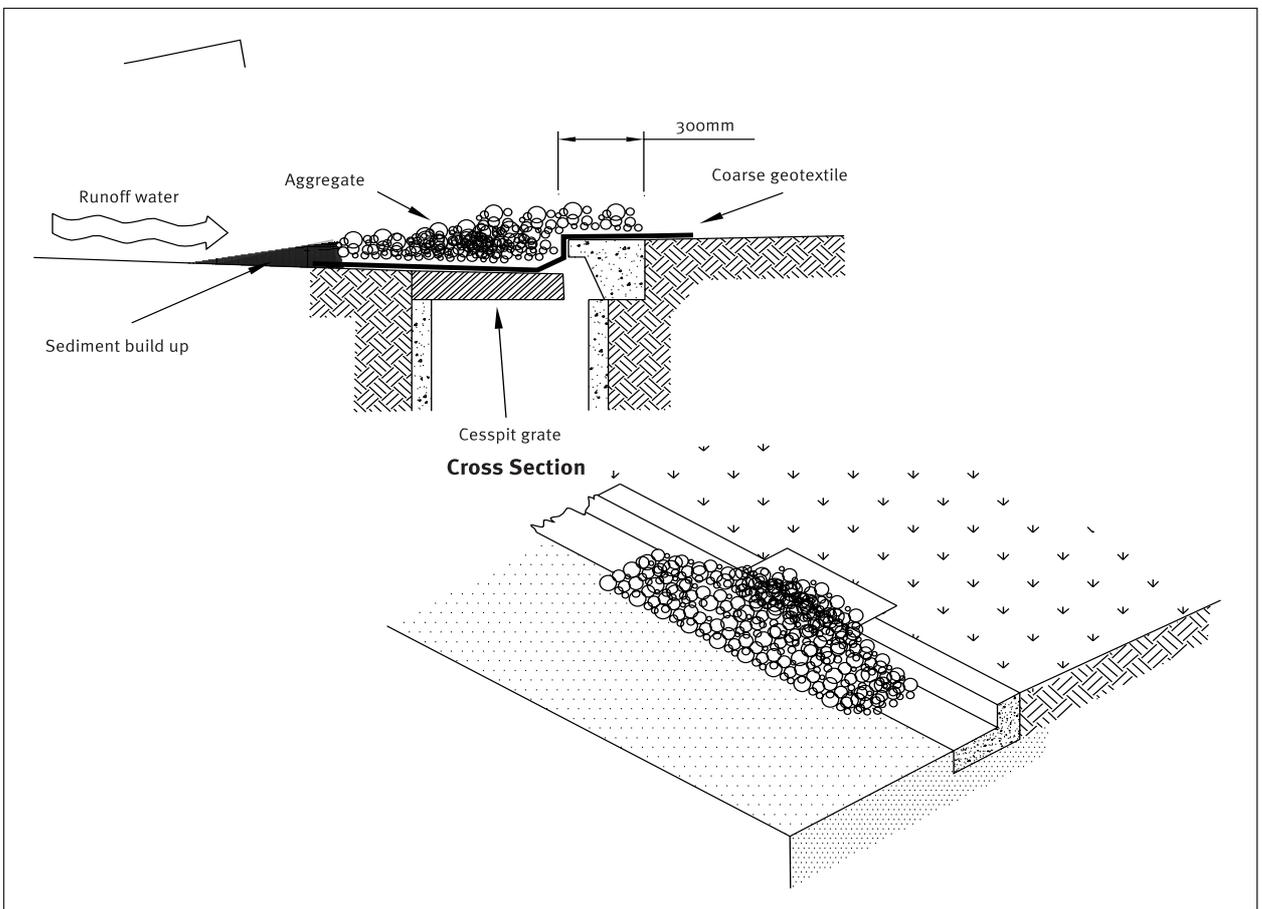

Construct Silt Fences for Stormwater Inlet Protection as outlined in Part B Section 2.2 of these Guidelines.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Figure 2.5 Stormwater Inlet Protection – Filter Media Design



2.6 Earth Bund

Plate 2.6 Earth Bund

Definition

A temporary berm or ridge of compacted soil (including topsoil) constructed to create impoundment areas where ponding of runoff can occur and suspended material can settle before runoff is discharged.

Purpose

Used to intercept sediment-laden runoff and reduce the amount of sediment leaving the site by detaining sediment-laden runoff.

Application

Earth Bunds can be constructed across disturbed areas and around construction sites and subdivisions. Keep them in place until the disturbed areas are permanently stabilised or adequately replaced by other means. Earth Bunds can assist the settling of sediment-laden runoff.

Earth Bunds are particularly useful for controlling runoff after topsoiling and grassing before vegetation becomes established. Where works are occurring within the berm area, compact the topsoil over the berm area as a bund adjacent and parallel to the berm. This will act as an impoundment area while also keeping overland flow away from the construction area.

Design

- o Earth Bunds need a constructed outlet structure and spillway as designed for Sediment Retention Ponds (Part B, Section 2.1 of these Guidelines). Alternatively, construct an outlet of perforated pipe connected to a non-perforated pipe that passes through the Earth Bund and either discharges to the gutter or directly to a stormwater inlet. Ensure that the section of pipe within the impoundment area is supported by means of a rigid post, allowing filtration to occur.


erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

- o Ensure the top opening of the perforated pipe is 100 mm lower than the stabilised spillway.
- o Ensure the section of pipe leading through the Earth Bund and continuing downslope below the Earth Bund is non-perforated.
- o Construct the Earth Bund such that the maximum contributing catchment does not exceed 0.3 ha.

Maintenance

Inspect and maintain Earth Bunds regularly and after each rainfall event to check for accumulated sediment

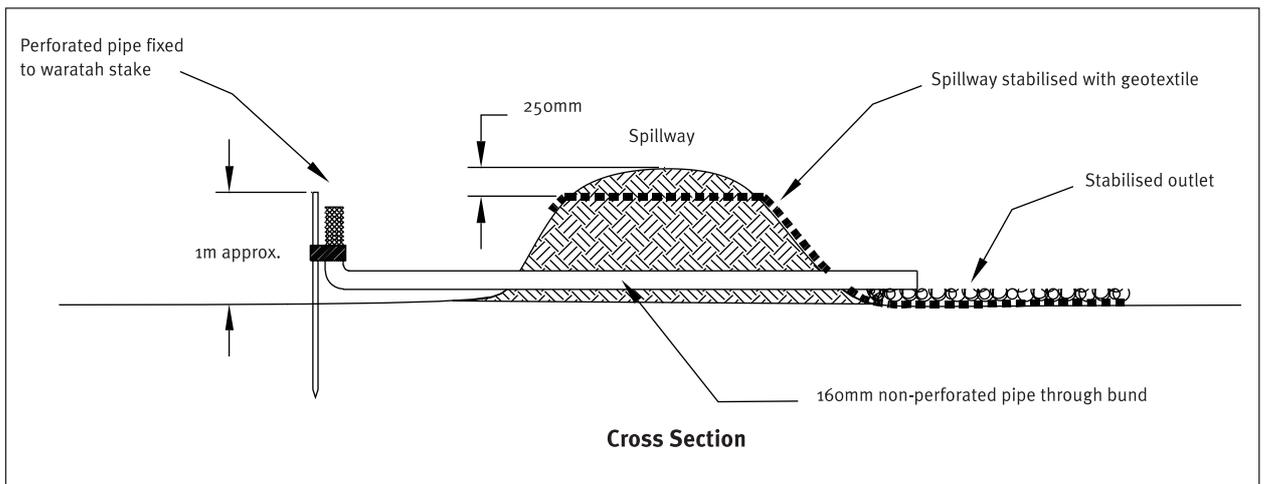

which may cause overtopping. Check any discharge points for signs of scouring and install further armouring or other

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

stabilisation if scouring is evident.

Figure 2.6 Earth Bund



2.7 Sump / Sediment Pit

Plate 2.7 Sump / Sediment Pit

Definition

A temporary pit which is constructed to trap and filter water before it is pumped to a suitable discharge area.

Purpose

To treat sediment-laden water that has been removed from areas of excavation, or areas where ponded sediment laden-water can not drain by other means.

Application

- o When water collects during the excavation phase of construction.
- o Particularly useful in urban areas during excavation for building foundations.
- o May also be used to de-water sediment retention measures.

Design

The design is based on a perforated vertical standpipe

placed in the centre of a pit which is then backfilled with aggregate.

- o Determine the number of Sump/Sediment Pits and their locations on site in accordance with the required dewatering facilities and procedures outlined below.
- o Pump water from the centre of the pipe to a suitable discharge area.
- o Direct the discharge to an appropriate outlet.
- o If the water is pumped directly to a receiving environment, then wrap a geotextile fabric around the standpipe to help achieve a clean water discharge. When a geotextile fabric is used, the surface area of the standpipe will need to be increased and the pumping rate decreased to prevent the geotextile becoming rapidly blocked.
- o Sump/Sediment Pit dimensions are variable, but require a minimum depth of 1m and a minimum volume of 2m³.
- o Construct the standpipe from 300 – 600mm

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

diameter pipe with a grid of 10 mm diameter perforations at 60mm spacings along the standpipe.


- o Place a base of 50mm aggregate in the Sump/Sediment Pit to a depth of 300mm.
- o After placing the standpipe in position, backfill the area with 50mm aggregate.
- o Extend the standpipe 300mm above the lip of the Sump / Sediment Pit with the aggregate extended 100 mm above the anticipated standing water elevation.

Maintenance

Undertake ongoing checks throughout the use of the Sump/Sediment Pit to ensure effective operation.

For isolated areas where dewatering must occur to facilitate progress, other methods may be appropriate. These alternatives include the following.

- o Pumping accumulated sediment-laden water to a sediment retention pond.
- o Constructing a Silt Fence and pumping water to behind the Silt Fence to be retained for treatment. Do not let water to be treated enter the Silt Fence as a concentrated flow or outflank the Silt Fence.
- o Discharge accumulated sediment laden water to

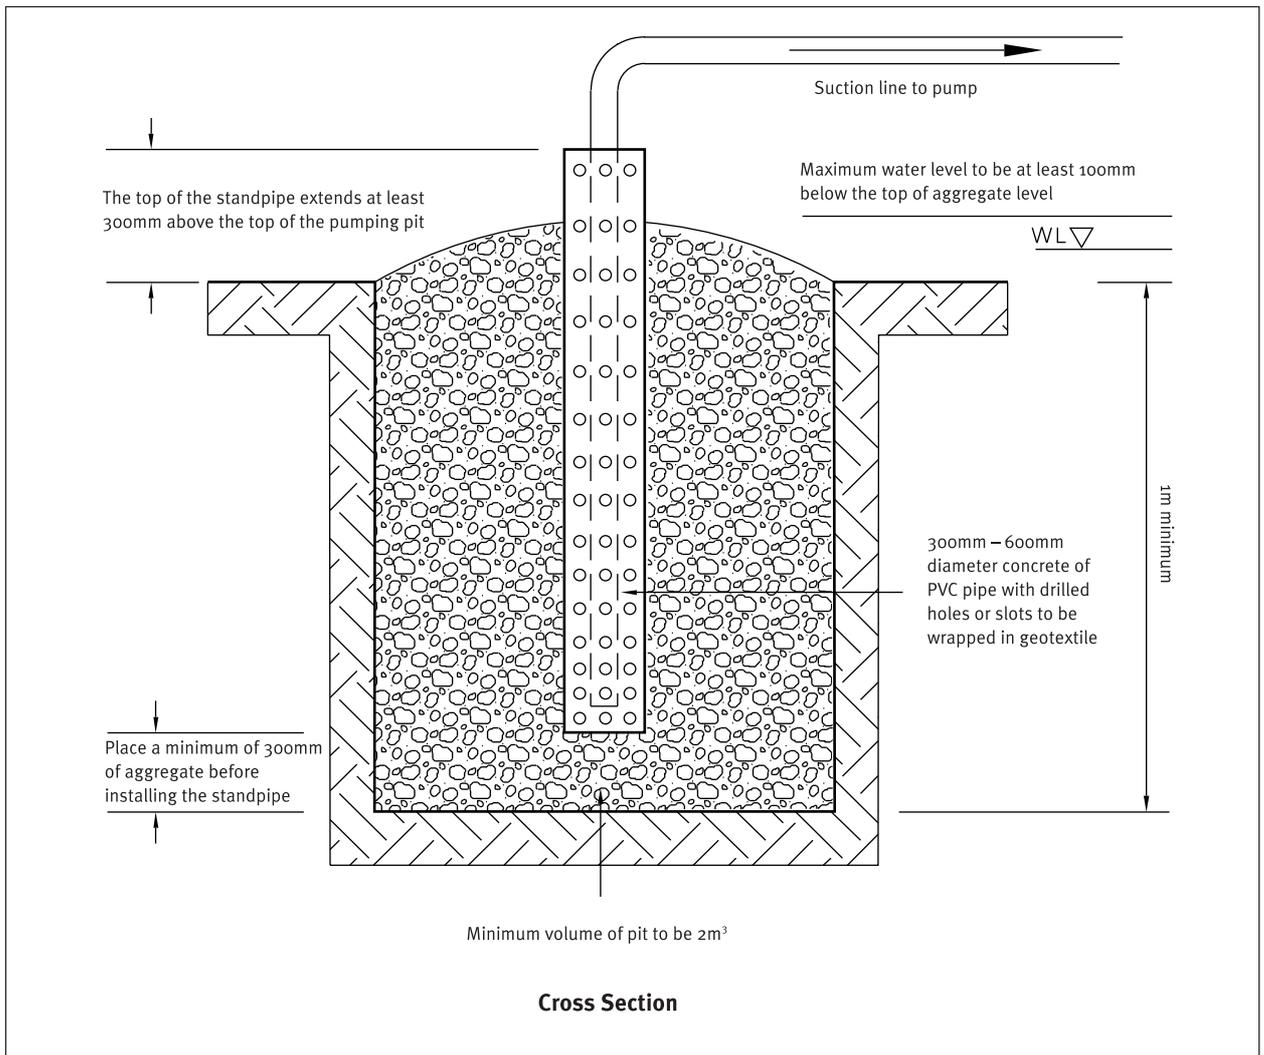

land where soakage may occur. Ensure that this untreated sediment-laden runoff cannot enter to a stormwater system or any watercourse.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Works within watercourses have very high potential for erosion and discharge of sediment. This is because such work is undertaken in or near flowing water – the major cause of erosion. Flowing water causes ongoing scour and provides the transport mechanism to allow sediment to be dispersed downstream of the works and ultimately, into the marine environment.

The following erosion and sediment control methods and techniques are specific to temporary watercourse works only. Such works may also require a range of control

measures additional to those detailed below. These other measures are described in other sections of these Guidelines and include both erosion control and sediment control techniques.

Design and planning consideration for a permanent watercourse crossing need to take into account the permanent nature of the crossing in question. Be sure that they are constructed in accordance with all relevant requirements.

3.1 Temporary Watercourse Crossings



Plate 3.1 Temporary Watercourse Crossing

Definition

A bridge, ford or temporary structure installed across a watercourse for short term use by construction vehicles.

Purpose

To provide a means for construction vehicles to cross watercourses without moving sediment into the watercourse, damaging the bed or channel, or causing

flooding during the construction, maintenance or removal of the structure.

Application

Where heavy equipment is required to be moved from one side of a watercourse to the other, or where traffic must cross the watercourse frequently for a short period of time.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Design

Careful planning can minimise the need for watercourse crossings. Wherever possible, avoid crossing watercourses by completing the development separately on each side of the channel, thus leaving the watercourse in its natural state.

If no other option exists and a watercourse crossing is required, select a location where the potential effects of the crossing (including construction) are minimised.

Plan watercourse crossings well before you need them and if possible, construct them during periods of dry weather. Complete construction as rapidly as possible and stabilise all disturbed areas immediately during and following construction.

Do not build a watercourse crossing during the fish migration period for the watercourse. The Auckland Regional Council can help identify these periods for particular watercourses.

There are three main types of crossing; bridges, culverts and fords.

Bridges

Where available materials and designs are adequate to bear the expected loadings, bridges are the preferred temporary watercourse crossing method. They provide the least obstruction to flow and fish migration, cause little or no modification of the bed or banks and generally require little maintenance.

It should be noted, however, that bridges can be a safety hazard if not designed, installed and maintained appropriately.

Culvert Crossings

Culverts are the most commonly used type of temporary watercourse crossing, and can be easily adapted to most site conditions. The installation and removal of culverts, however, causes considerable damage to watercourses and can also create the greatest obstruction to flood flows.

Fords

Made of stabilising material such as rock, fords are often used in steep catchments subject to flooding, but where normal flows are shallow. Only use fords where crossing requirements are infrequent. They can offer little or no obstruction to flows, are relatively easy to install and maintain, and in most cases can be left in place at the end of the construction activity.

As well as erosion and sediment control measures, structural stability, utility and safety must also be taken into account when designing temporary watercourse crossings. These details must be supplied to the Auckland Regional Council for approval prior to construction. In addition, a resource consent may be required for the construction of the proposed crossing. This can be determined by consulting with the Auckland Regional Council.

Any temporary crossing shall comply with the technical requirements of the various agencies involved and any specific requirements imposed by the Auckland Regional Council.

If the structure is no longer needed, remove the structure and all material from the site. Immediately stabilise all areas disturbed during the removal process by revegetation or artificial protection as a short term control measure. Keep machinery clear of the watercourse while removing the structure.

Maintenance

Inspect temporary watercourse crossings after rain to check for blockage in the channel, erosion of the banks, channel scour or signs of instability. Make all repairs immediately to prevent further damage to the installation. Permanent crossings need to be inspected following major storm events, again with all repairs being made immediately.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

3.2 Temporary Watercourse Diversion



Plate 3.2 Temporary Watercourse Diversion

Definition

A short term watercourse diversion to allow works to occur within the main watercourse channel under dry conditions.

Purpose

To enable watercourse works to be undertaken without working in wet conditions and without moving sediment into the watercourse.

Application

Temporary watercourse diversions are used as temporary measures to allow any works to be undertaken within permanent and ephemeral watercourses.

Design


Divert all flow via a stabilised system around the area of works and discharge it back into the channel below the works to avoid scour of the channel bed and banks. Figure 3.2.1 shows the suggested steps to minimise sediment generation and discharge from works within a watercourse.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region


Step 1

Excavate the diversion channel leaving a plug at each end so that the watercourse does not breach the diversion. Size the diversion channel to allow for a 5% AEP rain event. Stabilise the diversion channel appropriately to ensure it does not become a source of sediment. Anchor suitable geotextile cloth in place to the manufacturer's specifications, which will include trenching into the top of both sides of the diversion channel to ensure that the fabric does not rip out. Open the downstream plug and allow water to flow up the channel, keeping some water within the channel to reduce problems when the upstream plug is excavated. Open the upstream plug and allow water to flow into the channel.

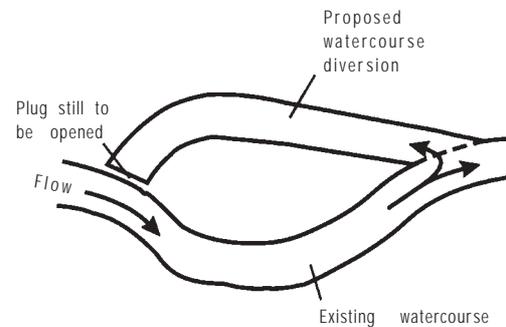


Step 2

Immediately place a non-erodible dam in the upstream end of the existing channel. Construct the dam as specified in Figure 3.2.2, where a compacted earth bund has shotcrete/ concrete placed, or appropriate geotextile pinned over it, with rock rip-rap extending over the upper face and adjacent to the lower face for scour protection.

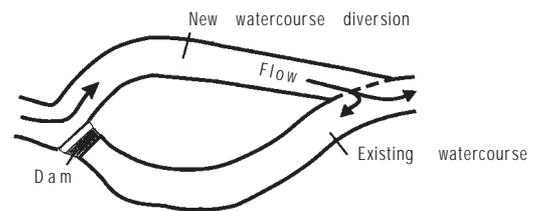

Step 3

Immediately install a non-erodible downstream dam to prevent backflow into the construction area. Drain the existing watercourse by pumping to a Sediment Retention Pond where treatment of the ponded water can occur prior to re-entering the live section of the watercourse. Construct the structure and complete all channel work.

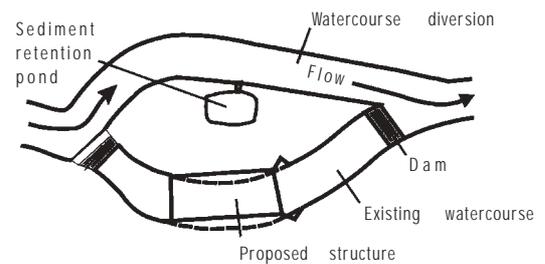

Step 4

Remove the downstream dam first, allowing water to flood back into the original channel. Remove the upstream dam and fill in both ends of the diversion channel with non-erodible material. Pump any sediment-laden water to a Sediment Retention Pond. Fill in the remainder of the diversion and stabilise.

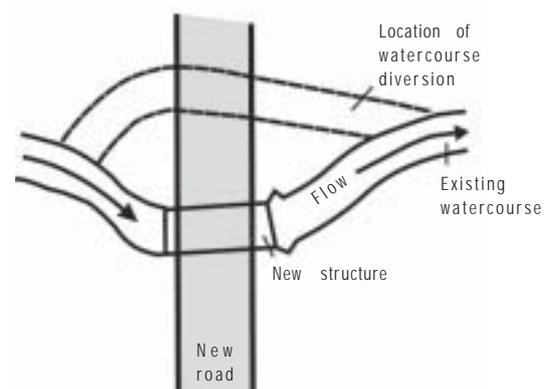


Figure 3.2.1 Temporary Watercourse Diversion Works Sequence

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

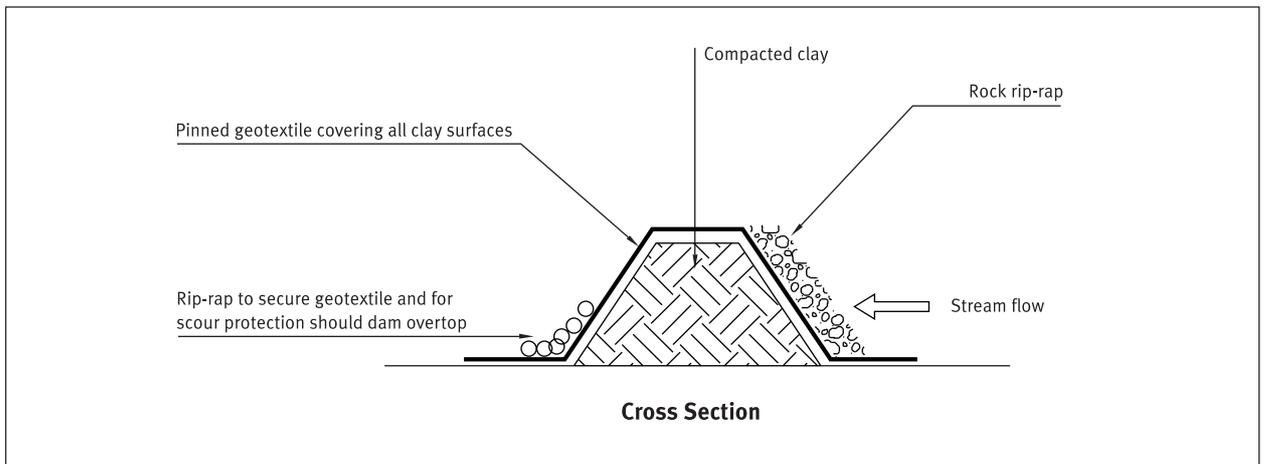


Figure 3.2.2 Temporary Watercourse Diversion Dam Detail

Maintenance

Any works within a watercourse will require ongoing and vigilant maintenance to minimise sediment generation. To achieve this, identify and correct any signs that may indicate a potential problems. Take particular notice of the following signs.

- o The geotextile lining ripping.
- o Scour occurring where the flow re-enters the channel.
- o Undercutting of the diversion lining.

Make repairs immediately.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

3.3 Rock Outlet Protection



Plate 3.3 Rock Outlet Protection

Definition

Rock placed at the outfall of channels or culverts.

Purpose

To break up concentrated flows, to reduce the velocity of flows to non erosive rates and to stabilise the outfall point.

Application

This practice applies where discharge velocities and energies at the outlets of pipes, culverts or flumes are sufficient to cause erosion. This will apply to most concentrated flow outfalls and outlets of all types such as sediment retention ponds, stormwater management ponds and road culverts.

Design

The following design does not apply to rock lining of watercourse channels. Detailed design of Rock Outlet Protection depends on the location.

- o Do not use ROP to protect pipe outlets at the top of cuts or on slopes steeper than 10 % because they reconcentrate flows and generate high velocities after the flow leaves the apron.
- o Ensure the channel containing the Rock Outlet Protection is straight throughout its entire length and is constructed using rock rip rap or gabion baskets/reno mattresses.
- o Remove soft material down to a firm bed and smooth and level the outfall area to eliminate voids.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

- Ensure rip rap is composed of a well graded mixture of washed rock and has an appropriate geotextile placed underneath it at all times to prevent soil movement into and through the rip-rap.
- Construct gabion baskets of hexagonal twist mesh with heavy galvanised steel wire. Ensure foundation conditions for the gabion baskets/reno mattresses are the same as for rock rip rap and place filter cloth beneath all gabion baskets. In some circumstances a key may be needed to prevent undermining of the main gabion structure.
- Design the structure in accordance with Auckland Regional Council approval and use materials within the relevant manufacturer's and engineering specifications.
- Remember that works within a watercourse such as the placement of rock rip rap or gabion baskets may require a resource consent from the Auckland Regional Council. Contact the Council well ahead of time so that any consents needed may be obtained before works are due to start.

Maintenance

Once installed, the maintenance requirements of the such structures is very low. Inspect after high flows to check scour and dislodgement and make repairs immediately.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Quarries are potentially a major source of sediment. They are often exposed for long periods of time and the area of bare earth can be considerable. Their continuous operation means that site conditions continually change. Careful planning is required to ensure that the operations are carried out with minimal environmental impact. It is the responsibility of the quarry operator to minimise the adverse environmental effects of the operation.

This section of these Guidelines is designed to help quarry operators address soil and water problems which may arise as a result of quarry operations. It should be read in conjunction with Part B, Sections 1 and 2 of these Guidelines, which detail specific erosion and sediment control practices. Quarries are required to produce management plans covering the various aspects of their operation. These Guidelines will help in the production of such plans.

The following specific issues associated with quarry operations are discussed below.

- o Road access
- o Stormwater
- o Overburden disposal
- o Stockpile areas
- o Rehabilitation of worked out areas
- o Riparian protection areas
- o Maintenance schedule for erosion and sediment control treatment structures

Road Access

Many quarries in the Auckland Region are serviced by metal roads, used in all weather conditions. Vehicle movements during rain can generate a lot of sediment. These roads, however, are not always within the designated quarry area and therefore, are not covered by the Quarry Management Plan. Careful consideration needs to be given to managing roads and traffic. In cases such as these, erosion and sediment control measures need to be installed along roads as outlined in Part B, Sections 1 and 2 of these Guidelines.

Where possible, incorporate road access into the Quarry Management Plan, ensuring all measures necessary are put in place to protect receiving environments.

Stormwater

Clean Runoff

As far as it is possible, divert clean water flow away from working and bare areas to prevent them from becoming contaminated by sediment. This aids in reducing the volume of contaminated runoff needing to be controlled and treated. Runoff Diversion Channels around the working site, as outlined in Part B, Section 1.1, are the simplest way to deal with the clean runoff.

Contaminated Runoff

Any runoff from bare areas will collect sediment and become contaminated. This contaminated runoff, which includes runoff from aggregate wash processes, must be contained and treated in an appropriate manner before being discharged to natural watercourses. The Quarry Management Plan must detail the methods for containment and treatment of all contaminated runoff. Particular attention should be paid to sensitive areas such as permanent watercourses, watercourse crossings and steeply sloping bare areas. Design all structures for the 5% AEP rainfall event.

Overburden Disposal

Methods of overburden disposal vary for each quarry operation. Overburden removal and disposal sites can be a major source of erosion and sediment discharges from quarries, particularly if the disposal site is not properly located and managed. The Quarry Management Plan for the site should give a reasonable indication of the following.

- o The timing and extent of overburden stripping, which will be related to an expected volume and area of extraction.
- o The methods to be employed for disposing the overburden.
- o Ongoing management of disposal sites, including provision for regular disposal of material trapped in sediment retention ponds.

If overburden disposal is dealt with in isolation from the Quarry Management Plan, consideration must be given to the following points.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

- o Selection of disposal site (why the site was chosen).
- o Stability of the site and subsequent overburden fill (batter slopes, safety factors, benching, underlying material, drainage).
- o Erosion and sediment control measures.
- o Rehabilitation of disposal site (revegetation, contouring).

Stockpile Areas

Stockpile areas include those used for stockpiling both raw or finished quarry products prior to further processing or final despatch. These areas can be a major source of contaminated runoff if not properly controlled. Position stockpiles well away from any watercourses and runoff flow paths.

Rehabilitation of Worked Out Areas

Planning for rehabilitation must be an integral part of all quarry operations. A properly planned and implemented rehabilitation programme will reduce the need for expensive ongoing erosion control, and control and treatment of contaminated runoff. The aim of site rehabilitation, whether temporary or permanent, is to maintain the site in a condition such that erosion and contaminated runoff are limited to an acceptable level. The prime areas for consideration are:

- o establishing suitable final ground contours;
- o establishing a suitable environment for vegetation growth;
- o revegetating the site with suitable vegetation cover.

Riparian Protection Areas

Riparian protection areas rely on vegetation to provide a buffer between the quarry operations and a water body such as a watercourse or wetland. These margins act as a physical barrier to keep machines away from sensitive areas as well as serving as a last resort sediment trap for diffuse runoff and/or unforeseen discharges. Do not, however, rely on riparian protection areas as a primary sediment control mechanism.

Maintenance Schedule for Erosion and Sediment Control or Treatment Structures

Because quarry operations continue over a very long time frame, it is important to develop a maintenance schedule for any control/treatment structures that are put in place. Money spent on designing and constructing control/treatment structures will be wasted if these structures are not adequately maintained.

Properly maintained structures will provide optimum performance at all times, thereby minimising the adverse environmental effects of the quarry operation. Conversely, poorly maintained structures are likely to result in unsatisfactory environmental protection despite being initially well designed and constructed.

Develop a maintenance schedule for the site that clearly indicates what is to be done in terms of visual inspections and maintenance works. Undertake routine maintenance works when they will cause the least possible detrimental environmental effects (either directly or indirectly). For example, do not clean sediment retention ponds during or immediately after rainfall events. To ensure that the operation of the pond is not affected at these critical times, maintenance should be done prior to events.

It is also particularly important that all control/treatment structures are inspected after significant rainfall events, or during prolonged rainfall, in addition to any regular scheduled inspections.

In the maintenance schedule include a procedure for immediately repairing and remedying any damage caused to control/treatment structures from daily quarry activities.

Within the overall quarry operation, give the inspection and maintenance of control/treatment structures a high priority. Ensure every person involved in the quarry operation is familiar with all aspects of erosion and sediment control on the site, including any special conditions of consents that are relevant. For example, specific water quality sampling requirements.

For all aspects of quarry operations where erosion and sediment controls are required, install the erosion and sediment control practices as specified in these Guidelines.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Vegetation removal operations can be a major source of sediment. They often involve earthworks associated with roading and landing (skid site) formation, as well as the direct disturbance and exposure of the soil surface. Careful planning is required to ensure that these operations are carried out with minimal environmental impact.

This section of these Guidelines is designed to help people involved with vegetation removal operations to address soil and water problems which may arise as a result of their operation. This section should be read in conjunction with Part B, Sections 1 and 2 of these Guidelines, which detail specific erosion and sediment control practices. Vegetation removal operations are also required to produce Harvesting Management Plans that cover the various aspects of their operation. These Guidelines can be used to assist in the production of these plans.

Various specific issues associated with vegetation removal operations are discussed below.

- o Roothing
- o Firebreaks
- o Landings and tracks
- o Land preparation
- o Harvesting and management after harvesting

Roothing

Roothing activities undertaken as part of vegetation removal operations have a large potential impact on soil and water values.

Planning, Location and Design

- o Locate roads on ridge tops, natural benches and flatter slopes, avoiding steep side slopes where possible.
- o Do not locate roads in gully bottoms.
- o Minimise gully crossings where possible.
- o Locate roads a safe distance from watercourses and gullies.

- o Do not discharge runoff directly to a watercourse, and where possible, ensure runoff is filtered through vegetation.
- o Where steep side cuts cannot be avoided, ensure adequate cross-formation drainage is installed and that these channels flow onto stable or erosion proof areas such as spurs. Ensure they do not discharge onto areas of soft fill.

Construction

- o Where construction operations are to be undertaken in erosion-prone areas or adjacent to a watercourse, use an excavator to enable soil and other loose material to be placed in a stable position.
- o Do not bulldoze loose material into watercourses or areas where it may wash into watercourses.
- o Keep machines out of watercourses and minimise the number of crossings.
- o If operations are suspended, put adequate drainage provisions in place to avoid concentration of runoff and scour problems until work resumes.
- o Stabilise cut and fill slopes where required, using measures such as hydroseeding and straw mulching.
- o Install contour drains and flumes to prevent scouring.
- o Flume or pipe runoff to solid ground and then discharge onto logging slash, gravel, rock rip-rap, or geotextiles.
- o Plan the operational sequence of installing culverts and bridges across watercourses. Ensure all materials, machinery and labour are on hand before commencing construction.
- o Ensure that the supervision of culvert and bridge installations is carried out by a suitably experienced person.
- o Complete the construction of watercourse crossings, approach roads and associated erosion and sediment control measures as a continuous operation.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Firebreaks

- Locate firebreaks to minimise the possibility of debris entering watercourses.
- Keep earthworks associated with firebreaks clear of steep drop-offs and watercourses. Consideration must be given to the erosion potential of tracks formed along gully bottoms. These areas should be avoided.
- Maintain firebreaks to a reasonable standard to control runoff, rilling and gully erosion.
- Construct contour drains as required.
- Avoid ponding of water above steep drop-offs and, if ponding occurs, implement an appropriate drainage design to prevent gully erosion.
- At the completion of operations, check firebreaks for any potential erosion problems.

Landings and Tracks

Landings and tracks are generally permanent features and therefore require careful location preparation, direction of fall and control of runoff. Skid tracks, while generally more of a temporary feature, also require careful consideration of the above.

Any tracking results in concentration of runoff and consequently, an increase in erosion. Minimise erosion by tracking across contours and where possible, locating tracks on ridges rather than in gullies.

Ensure that extraction tracks do not lead directly down towards watercourses where runoff may go directly into the channel.

Where possible try to keep skid tracks and landings at least 20 m away from watercourses.

At the completion of logging operations, construct contour drains across skid tracks wherever runoff may be concentrated. Ensure that contour drains discharge to solid ground and not to areas of fill.

Keep landings well clear of permanent watercourses. Where no alternative exists, ensure that the watercourse is not obstructed. Form all landings so that surface runoff does not flow down towards or directly into a watercourse. Construct earth bunds along watercourse edge boundaries to prevent debris and sediment from entering watercourses. Extra caution must also be exercised in the planning and construction measures

which control water flowing off skid tracks onto landings, so as to minimise water runoff onto the landing.

Take extra caution when forming landings within dry gullies. Where this is done, ensure the following.

- A slash is placed across the gully floor to act as a sediment barrier.
- Fill batters are sown with a suitable vegetation cover.

Land Preparation

Planning

Plan and implement all land preparation and forest establishment to match an appropriate proposed method of harvesting.

Protection Areas (Riparian Margins)

Retain or establish protection areas along all watercourses. Where protection areas do not exist, they can be established in conjunction with the following operations.

- Land clearing or site preparation on areas being converted to production forestry.
- Planting on farm land or similar sites.
- Replanting on exotic clearfelled areas.
- Vegetation removal on terrain which may be difficult, very steep or erosion prone.

Re-evaluate all existing protection areas when harvesting or replanting adjacent to production stands.

Generally, protection areas can be left to regenerate naturally. However, in some cases it may be appropriate to accelerate revegetation by actively planting protection species.

Planting Boundaries

When re-planting, establish planting boundaries adjacent to watercourses in order to minimise potential watercourse damage from future harvesting operations. Establish planting boundaries on a 'case by case' basis with consideration to both topography and soil stability.

V-Blading/Line Raking

Where possible operate across the contour, to minimise runoff concentration down the blade lines.

Where downhill runs are unavoidable, limit them to 50 m maximum length. Do not attempt these runs on slopes too steep for the tractor to reverse up. Blade or rake at

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

least one line on the contour along the lower boundary of downhill operations to prevent runoff concentration at low points or gully systems. Finish downhill runs well before any fill batter slopes such as landings and access roads.

Near watercourses, ensure the operation runs parallel to them at a minimum distance of 20 m. At the completion of the operation, inspect the site for areas of erosion potential and undertake appropriate remedial action.

Establishing and Tending

During establishing and tending stages, minimise soil loss and prevent contamination of watercourses with chemicals, fertilisers, debris or detritus and.

During thinning to waste operations, fell trees away from watercourses where possible.

Harvesting and Management After Harvesting

Planning of Logging Operations

Plan all logging operations, particularly the location of skid tracks and roads, to protect water and soil values.

Off-site adverse effects must be avoided or minimised when determining the ability and management of a catchment to be harvested. When harvesting near sensitive areas, extract towards landings located away from them.

Felling Operations

When trees are being felled within reach of a watercourse, ensure an experienced feller is in control of the operation. Where possible, fell trees away from watercourses. Extract any trees that have fallen into watercourses before delimiting and cross cutting them. Back pull, or employ other acceptable directional felling techniques to fell problem trees, particularly on steep or unstable watercourse faces and edges. Remove all large logging debris from watercourses at the completion of the operation, keeping machinery out of the watercourse.

Extraction Operations

o Ground Based Systems

- Keep tracking and stumping activities to a practical minimum. Use a few carefully chosen tracks and stay on these rather than taking shortcuts which cause unnecessary ground disturbance.

- Carry logs off the ground or on the machine where possible.
 - Keep the machines blade up and do not bulldoze soil and stumps needlessly.
 - Do not cross watercourses (other than at approved crossing points) and do not haul along them.
 - On soft and/or wet soils or steeper slopes, use low-ground-pressure machines such as flexible-track or wide-tyre skidders.
- ##### o Cable Systems
- Where cable systems are used in environmentally sensitive areas, keep the settings small, the haul distances short and the hauling direction uphill wherever practicable. Avoid cross slope haul lines that damage protection areas or sweep slash and soil into watercourses.
 - Whenever possible when hauling across watercourses, use a system such as a skyline which allows full suspension of logs. Lift logs clear of watercourse banks and protection areas.

Cleanup Operations

On completion of logging operations, carry out the following procedures.

- o Remove all temporary crossings.
- o Construct contour drains on skid tracks to prevent runoff concentration and sediment flow.
- o Ensure landings are properly drained and that sediment and debris are unable to directly enter any watercourse.
- o Stabilise fill batters on landings and tracks by sowing with suitable grass seed.
- o Ensure runoff is channelled safely over batter slopes and onto stable areas.

On all aspects of vegetation removal operations where erosion and sediment controls are required, install the erosion and sediment control measures as specified in these Guidelines.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Rules from Proposed Regional Plan: Sediment Control

Table A Permitted Activities

Type of Activity	Within the Sediment Control Protection Area	Outside the Sediment Control Protection Area
Vegetation Removal <ul style="list-style-type: none"> ○ On Sand Soils ○ On all Soils other than Sand Soils 	<p>Area less than 0.25 ha</p> <p>Area less than 0.25 ha</p>	<p>All vegetation removal</p> <p>Area less than 10.0 ha</p>
Earthworks <ul style="list-style-type: none"> ○ On all Soils 	<p>Area less tha 0.25 ha</p>	<p>Area less than 1.0 ha where the land has a slope less than 15°</p> <p>Area less than 0.25 ha where the land has a slope equal to or greater than 15°</p>
Roading/Tracking/Trenching <ul style="list-style-type: none"> ○ On Sand Soils ○ On Soils other than Sand Soils 	<p>Length less than 100 ○</p> <p>Length less than 100 ○</p>	<p>All roading, tracking and trenching.</p> <p>Area less than 1.0 ha where the land has a slope less than 15°</p> <p>Area less than 0.25 ha where the land has a slope equal to or greater than 15°</p>
Quarries <ul style="list-style-type: none"> ○ Where no runoff leaves the site and no wash process on site ○ Remainder where runoff leaves the site and/or there are wash processes on site 	<p>All quarries</p> <p>Quarry area less than 1000 m² and/or less than 1.0 ha catchment</p>	<p>All quarries</p> <p>Quarry area less than 1000 m² and/or less than 1.0 ha catchment</p>

Note

(1) Sediment Control Protection Area is defined as:

- a) 100 metres either side of a foredune or 100 metres landward of the coastal marine area (whatever is the more landward of mean high water springs); or
- b) 50 metres landward of the edge of a watercourse, or wetland of 1000 m² or more.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Table B Controlled Activities

Type of Activity	Outside the Sediment Control Protection Area
Vegetation Removal ○ On soils other than Sand Soils	Area greater than or equal to 10.0 hectares where the land has a slope less than 15°
Earthworks ○ On all soils including Sand Soils	Area between 1.0 and 5.0 hectares where the land has a slope less than 15°
Roothing/Tracking/Trenching ○ On Soils other than Sand Soils	Area between 1.0 and 5.0 hectares where the land has a slope less than 15°

Note

- (1) Sediment Control Protection Area is defined as:
- a) 100 metres either side of a foredune or 100 metres landward of the coastal marine area (whatever is the more landward of mean high water springs); or
 - b) 50 metres landward of the edge of a watercourse, or wetland of 1000m² or more.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Table C Restricted Discretionary Activities

Type of Activity	Within the Sediment Control Protection Area	Outside the Sediment Control Protection Area
Vegetation Removal <ul style="list-style-type: none"> ○ On sand soils ○ On all Soils other than Sand Soils 	<p>Area greater than or equal to 0.25 ha</p> <p>Area greater than or equal to 0.25 ha on land with a slope greater than</p>	<p>(Refer to Table A – Permitted Activities)</p> <p>Area greater than or equal to 10.0 ha or equal to 15°</p>
Earthworks <ul style="list-style-type: none"> ○ On all Soils including Sand Soils 	<p>Area greater than or equal to 0.25 ha</p>	<p>Area greater than or equal to 5.0 ha on land with a slope less than 15°</p> <p>Area greater than or equal to 0.25 ha on land with a slope greater than or equal to 15°</p>
Roading/Tracking/Trenching <ul style="list-style-type: none"> ○ On Sand Soils ○ On soils other than sand soils 	<p>Length of 100 ○ or more</p> <p>Length of 100 ○ or more</p>	<p>(Refer to Table A – Permitted Activities)</p> <p>Area greater than or equal to 5.0 ha where the land has a slope less than 15°</p> <p>Area greater than or equal to 0.25 ha where the land has a slope greater to or equal to 15°</p>
Quarries <ul style="list-style-type: none"> ○ Where runoff leaves the site and/or there are wash processes on site 	<p>Quarry area of 1000 m² or more and/or with a catchment of 1.0 ha or more</p>	<p>Quarry area of 1000 m² or more and/or with a catchment of 1.0 ha or more</p>

Note

- (1) Sediment Control Protection Area is defined as:
- a) 100 metres either side of a foredune or 100 metres landward of the coastal marine area (whatever is the more landward of mean high water springs); or
 - b) 50 metres landward of the edge of a watercourse, or wetland of 1000 m² or more.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

Land Use Consent: Sediment Control

To: Consent Services
Auckland Regional Council
Private Bag 92012
Auckland
Ph: (09) 379 4420
Fax: (09) 366 2155

For Office Use Only:	12/93
Consent No.:	
Fee: \$	

Pursuant to Section 88 of the Resource Management Act 1991, the undersigned hereby applies for a consent, in accordance with the details below:

(All units should be in metric)

Name of Site: _____ Amount forwarded with this application: \$ _____

PART A – APPLICANT DETAILS

1. Applicant Details

- a) Full name(s) or company name of applicant(s): _____
- b) Postal address: _____
- c) Telephone number: Business: _____ Fax number: _____
- d) Name of contact person: _____
- e) Nature of applicant (tick as appropriate): Owner Other (specify) _____

2. Consultant/Agent Details (if applicable)

- a) Name: _____
- b) Postal Address: _____
- c) Telephone number: _____ Fax number: _____
- d) Name of contact person: _____

3. Site Engineer (if applicable)

- a) Name: _____
- b) Postal address: _____
- c) Telephone number: _____ Fax number: _____

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

4. All correspondence relating to this application should be sent to:

Applicant: Consultant/Agent Other (give details): _____

5. In which Territorial Authority (TA) is the proposal situated?

Rodney North Shore Auckland Waitakere
 Manukau Franklin Papakura

6. Are there any previous or existing consents already granted related to this proposal?

Yes No

If yes, give reference number(s) and description (e.g. Stormwater Discharge Consent Br XXXXX):

TA: _____ Regional Council: _____

7. Are there any further consents required from TA/Regional Council?

Yes No

Name of consent authority: _____

Name of Consent Authority: _____

Have these consents been applied for? Yes No

If yes, what is the status of these consents? _____

PART B – SITE DETAILS

1. Type of Development

(e.g. quarry, residential subdivision, roadworks, cleanfill, forestry operation, etc)

2. Programme

a) Work commencement date: _____ 19 ____

b) Work completion date: _____ 19 ____

c) Requested expiry date of consent: _____ 19 ____

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

3. Site Details

- a) Total property area (ha): _____
- b) Location – address and legal description: _____

(give full legal description, e.g. certificate of title, survey district, lot number – attach certificate of title search)
- c) Zoning of area under District Plan: _____
- d) Map reference: _____
[Use NZMS 260 (1:50,000), or for urban localities NZMS 271 (1:20,000), eg. R11 672814]
- e) Water body into which runoff will be discharged: _____

4. Site Size

- a) Total area of bare ground on site (accumulative total through development period): _____
- b) Total length of site (roading, trenching, tracking only): _____
- c) Volume of proposed earthworks: _____

PART C – OPERATION

1. Management Plan

Please supply an erosion and sediment control plan for the operation. This should be done in conjunction with the required Assessment of Effects (Part D). Details to be included in the erosion and sediment control plan should be appropriate to the scale of operation, but should generally include the following:

- o Detailed location map including boundaries, location of stream, roads, etc.
(Ensure the map includes a scale bar).
- o Site description, ie topography, vegetation, soils, etc.
- o Details of proposed activity, eg. proposed quarrying, vegetation removal or cleanfill operation.
- o Details of plans (with a scale bar) to avoid sediment removal off site (including drawings, specifications and supporting calculations). *(Please provide 2 copies):*
 - erosion control
 - sediment control
 - work programme details (eg. timing, scheduling of works, etc).
- o Details of any stream crossing – type of crossing, size, etc, and measures taken to avoid sediment impact.
- o Rehabilitation details.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

- o Details of proposed monitoring measures to assess/demonstrate effectiveness of control measures.
- o Details of any other measures designed to reduce impact on the environment.

2. Vegetation Removal

- a) Purpose of land clearing operation: _____
- b) Area of land in native vegetation: (specify type) _____
 Area of land in native scrub: _____
 Area of land in other: _____
- c) Proposed method (eg. tractor, hauler, crushing, spraying): _____
- d) Proposed use or management of the area following operation: _____

3. Earthworks (includes roadworks, etc)

- a) Runoff control:
 - diversions around site (*attach design details*)
 - on-site (*attach details*)
- b) Sediment control:
 - i) Sediment retention ponds. Please complete the table below. Attach details on pond design including spillway and dewatering measures. Show catchment boundaries and pond location on management plan.

Catchment Pond No.	Construction Period (Stage)	Catchment Area (hectares)	Sediment Pond Volume (m ³)

- ii) Silt fences (*specify with design details*)
- iii) Stormwater inlet protection (*specify with design details*)
- iv) Other (*specify with design details*)

Will sediment control measures vary during the project? (eg. roading and stormwater drainage develops).

- Yes
- No

If yes, then please provide measures of progressive runoff and sediment control methods proposed.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

4. Quarries and Cleanfills

- a) Runoff control
 - diversion around site (*attach details*)
 - on-site (*attach details*)
- b) Sediment control
 - sediment retention ponds (*as for 3(b)(i)*)
 - chemical treatment of runoff as appropriate (*attach design details*)
- c) Fill/dump sites
 - details on stability and compaction of fill and overburden dumps and associated land
 - runoff control and drainage
 - sediment control and revegetation details
- d) Process water
 - attach details of operation and discharge

5. Revegetation

Specify with seed/fertiliser mix and timing. Hydrology and mulching also needs to be specified.

PART D – ASSESEMENT OF EFFECTS ON THE ENVIRONMENT

(Reference must be made to Assessment of Environmental Effects Guideline for Land Disturbing Activities)

NB. It is recommended that the applicant consults with the Tangata Whenua prior to submitting an application for a Land Use Consent: Sediment Control.

1. Matters that should be included in an Assessment of Effects on the environment

Subject to the provisions of any policy statement or plan, an assessment of effects on the environment for the purposes of section 88(6)(b) should include:

- a) A description of the proposal.
- b) Where it is likely that an activity will result in any significant adverse effect on the environment, a description of any possible alternative locations or methods for undertaking the activity.
- c) An assessment of the actual or potential effect on the environment of the proposed activity.
- d) Where the activity includes the use of hazardous substances and installations, an assessment of any risks to the environment which are likely to arise from such use.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

- e) Where the activity includes the discharge of any contaminant, a description of:
 - i) The nature of the discharge and the sensitivity of the proposed receiving environment to adverse effects; and
 - ii) Any possible alternative methods of discharge, including discharge into any other receiving environment.
- f) A description of the mitigation measures (safeguards and contingency plans where relevant) to be undertaken to help prevent or reduce the actual or potential effect.
- g) An identification of those persons interested in or affected by the proposal, the consultation undertaken, and any response to the views of those outlined.
- h) Where the scale or significance of the activity's effect are such that monitoring is required, a description of how, once the proposal is approved, effects will be monitored and by whom.

2. Matters that should be considered when preparing an assessment of effects on the environment

Subject to the provisions of any policy statement or plan, any persons preparing an assessment of the effects on the environment should consider the following matters:

- a) Any effect on those in the neighbourhood and, where relevant, the wider community including any socio-economic and cultural effects.
- b) Any physical effect on the locality, including any landscape and visual effects.
- c) Any effect on ecosystems, including effects on plants or animals and any physical disturbance of habitats in the vicinity.
- d) Any effect on natural and physical resources having aesthetic, recreational, scientific, historical, spiritual, or cultural, or other special value for present or future generations.
- e) Any discharge of contaminants into the environment, including any unreasonable emission of noise and options for the treatment and disposal of contaminants.
- f) Any risk to the neighbourhood, the wider community, or the environment through natural hazards or the use of hazardous substances or hazardous installations.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

PART E - CHECK LIST

- | | |
|---|-----|
| Have you remembered to: | Yes |
| a) Fully complete this application form _____ | 0 |
| b) Include a location plan (with scale bar) _____ | 0 |
| c) Include design calculations for erosion and sediment control _____ | 0 |
| d) Include an erosion and sediment control plan _____ | 0 |
| e) An Assessment of Environmental Effects (see Guideline) _____ | 0 |
| f) Include written approval from all affected persons _____ | 0 |
| g) Pay the application fee _____ | 0 |

List any other supporting information supplied with this application, eg. archaeological assessments, technical specifications, consultation documents, etc.

Signature of Applicant or Agent: _____ Date: _____

Name (block capitals): _____

Designation: (eg. Owner, Manager, Consultant) _____

Please attach your Deposit Fee payment to this application. Make cheques payable to 'Auckland Regional Council'. Refer to the deposit fee schedule for details.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

Application for Consent to Undertake Works in a Watercourse or Lake (Section 13 of the Resource Management Act)

To: Consent Services
Auckland Regional Council
Private Bag 92012
Auckland
Ph: (09) 379 4420
Fax: (09) 366 2155

For Office Use Only:	12/93
Consent No.:	
Fee: \$	

Pursuant to Section 88 of the Resource Management Act 1991, the undersigned hereby applies for a consent, in accordance with the details below:

(All units should be in metric)

Name of Site: _____ Amount forwarded with this application: \$ _____

PART A – APPLICANT DETAILS

1. Applicant Details

- a) Full name(s) or company name of applicant(s): _____
- b) Postal address: _____
- c) Telephone number: Business: _____ Fax number: _____
- d) Name of contact person: _____
- e) Nature of applicant (tick as appropriate): Owner Other (specify) _____

2. Consultant/Agent Details (if applicable)

- a) Name: _____
- b) Postal Address: _____
- c) Telephone number: _____ Fax number: _____
- d) Name of contact person: _____

3. Site Engineer (if applicable)

- a) Name: _____
- b) Postal address: _____
- c) Telephone number: _____ Fax number: _____

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

4. All correspondence relating to this application should be sent to:

Applicant: Consultant/Agent Other (give details): _____

5. In which Territorial Authority (TA) is the proposal situated?

Rodney North Shore Auckland Waitakere
 Manukau Franklin Papakura

6. Are there any previous or existing consents already granted related to this proposal?

Yes No

If yes, give reference number(s) and description (e.g. Land Use Consent: Sediment Control Sc11111):

TA: _____ Regional Council: _____

7. Are there any further consents required from TA/Regional Council?

Yes No

Name of consent authority: _____

Name of Consent Authority: _____

Have these consents been applied for? Yes No

If yes, what is the status of these consents? _____

PART B – SITE DETAILS

1. Type of Development

(e.g. bridge construction, channel lining/works, diversion)

2. Programme

a) Work commencement date: _____ 19 ____

b) Work completion date: _____ 19 ____

c) Requested expiry date of consent: _____ 19 ____

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

3. Site Details

- a) Total property area (ha): _____
- b) Location – address and legal description: _____

(give full legal description, e.g. certificate of title, survey district, lot number – attach certificate of title search)
- c) Zoning of area under District Plan: _____
- d) Map reference: _____
[Use NZMS 260 (1:50,000), or for urban localities NZMS 271 (1:20,000), eg. R11 672814]
- e) Water body into which runoff will be discharged: _____
- f) Total length of works: _____
- g) Will chemicals or toxic substances be used on the site? Yes No
 If yes, please provide details: _____

4. Name of watercourse or natural water on which the works will take place:

Name: _____ or Tributary of: _____
 River Number (*office use only*)

--	--	--	--	--	--

5. Summary of flow information for works in a watercourse (not required for lakes):

- a) Area of catchment contributing to the flow at the site: _____ ha
- b) i) _____ Calculation of 1% Annual Exceedance Probability (AEP) at the site. If your method of calculation is the Rational formula, complete the following table.

	Area (ha)	Design Runoff Coefficient
Undeveloped: Left in natural state		
Developed: Grassed, cultivated		
Developed, impervious surfaces; roads, carparks, roofed		
Other: Please specify		
- ii) Time of concentration at site: _____ mins
- iii) Design rainfall intensity corresponding to storm of 1% AEP: _____ mm/hr
- iv) Location of the rainfall station and how the intensity data was derived from its records: _____

- v) 1% AEP design flow at site: _____ m³/s

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

- c) If your method of flow calculation is other than the Rational formula:
- i) State the method: _____
 - ii) 1% AEP design discharge: _____ m³/s _____
 - iii) Provide details of calculations on a separate sheet
 - d) _____ Estimate of 1% AEP flood level at site:
_____ RL (o) _____
_____ Provide details of method used for estimated on a separate sheet.

6. Is the work going to be completed in stages?

- Yes No

7. Supporting information

- a) Names and addresses of all property owners/occupiers immediately upstream and downstream of the site, and any other party who may be affected by the proposed works.
- b) An accurate plan (drawn to scale and with a scale bar) showing the location of the site, the immediate downstream and upstream properties listed in (a) above, and any other relevant features. Please provide a reduced copy of the plan in A3 size (42cm x 30cm) which we can use to notify affected parties.
- c) A full set of plans showing the works. Please provide a reduced copy of the plans in A3 size (42cm x 30cm) which we can use to notify affected parties.

PART C – OPERATION

1. Management Plan

Please supply an erosion and sediment control plan for the operation. This should be done in conjunction with the required Assessment of Effects (Part D). Details to be included in the erosion and sediment control plan should be appropriate to the scale of operation, but should generally include the following:

- o Detailed location map including boundaries, location of stream, roads, etc.
(Ensure the map includes a scale bar).
- o Site description.
- o Details of plans (with a scale bar) to avoid sediment removal off site (including drawings, specifications and supporting calculations). *(Please provide 2 copies):*
 - erosion control
 - sediment control
 - work programme details (eg. timing, scheduling of works, etc).

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

- o Rehabilitation details.
- o Details of proposed monitoring measures to assess/demonstrate effectiveness of control measures.
- o Details of any other measures designed to reduce impact on the environment.

PART D – ASSESEMENT OF EFFECTS ON THE ENVIRONMENT

(Reference must be made to Assessment of Environmental Effects Guideline for Land Disturbing Activities)

NB. It is recommended that the applicant consults with the Tangata Whenua prior to submitting an application for a Land Use Consent: s13.

1. Matters that should be included in an Assessment of Effects on the environment

Subject to the provisions of any policy statement or plan, an assessment of effects on the environment for the purposes of section 88(6)(b) should include:

- a) A description of the proposal.
- b) Where it is likely that an activity will result in any significant adverse effect on the environment, a description of any possible alternative locations or methods for undertaking the activity.
- c) An assessment of the actual or potential effect on the environment of the proposed activity.
- d) Where the activity includes the use of hazardous substances and installations, an assessment of any risks to the environment which are likely to arise from such use.
- e) Where the activity includes the discharge of any contaminant, a description of:
 - i) The nature of the discharge and the sensitivity of the proposed receiving environment to adverse effects; and
 - ii) Any possible alternative methods of discharge, including discharge into any other receiving environment.
- f) A description of the mitigation measures (safeguards and contingency plans where relevant) to be undertaken to help prevent or reduce the actual or potential effect.
- g) An identification of those persons interested in or affected by the proposal, the consultation undertaken, and any response to the views of those outlined.
- h) Where the scale or significance of the activity's effect are such that monitoring is required, a description of how, once the proposal is approved, effects will be monitored and by whom.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

2. Matters that should be considered when preparing an assessment of effects on the environment

Subject to the provisions of any policy statement or plan, any persons preparing an assessment of the effects on the environment should consider the following matters:

- a) Any effect on those in the neighbourhood and, where relevant, the wider community including any socio-economic and cultural effects.
- b) Any physical effect on the locality, including any landscape and visual effects.
- c) Any effect on ecosystems, including effects on plants or animals and any physical disturbance of habitats in the vicinity.
- d) Any effect on natural and physical resources having aesthetic, recreational, scientific, historical, spiritual, or cultural, or other special value for present or future generations.
- e) Any discharge of contaminants into the environment, including any unreasonable emission of noise and options for the treatment and disposal of contaminants.
- f) Any risk to the neighbourhood, the wider community, or the environment through natural hazards or the use of hazardous substances or hazardous installations.

PART E - CHECK LIST

Have you remembered to:	Yes
a) Fully complete this application form _____	<input type="radio"/>
b) Include a location plan (with scale bar) _____	<input type="radio"/>
c) Include design calculations for erosion and sediment control _____	<input type="radio"/>
d) Include an erosion and sediment control plan _____	<input type="radio"/>
e) An Assessment of Environmental Effects (see Guideline) _____	<input type="radio"/>
f) Include written approval from all affected persons _____	<input type="radio"/>
g) Pay the application fee _____	<input type="radio"/>

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

*Land Use Consent
Sediment Control and Land Use Consent
Works Within a Watercourse*

List any other supporting information supplied with this application, eg. archaeological assessments, technical specifications, consultation documents, etc.

Signature of Applicant or Agent: _____ Date: _____

Name (block capitals): _____

Designation: (eg. Owner, Manager, Consultant) _____

Please attach your Deposit Fee payment to this application. Make cheques payable to 'Auckland Regional Council'. Refer to the deposit fee schedule for details.

erosion&sedimentcontrol


Guidelines for Land Disturbing Activities in the Auckland Region

Standard Symbols for Erosion and Sediment Controls

	Runoff Diversion Channel/Bund
	Contour Drain
	Benched Slope
	Rock Check Dam
	Top Soiling
	Temporary Seeding
	Permanent Seeding
	Hydroseeding
	Mulching
	Turfing
	Geosynthetic Erosion Control Systems
	Stabilised Construction Entrance

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

	Pipe Drop Structure/Flume
	Level Spreader
	Surface Roughening
	Sediment Retention Pond
	Silt Fence
	Super Silt Fence
	Hay Bale Barrier
	Stormwater Inlet Protection
	Earth Bund
	Sump/Sediment Pit
	Temporary Watercourse Crossing
	Temporary Watercourse Diversion
	Rock Outlet Protection

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

(AEP) Annual Exceedance Probability

A statistical term defining the probability of an event occurring annually. Expressed as a percentage and generally used in hydrology to define rainstorm intensity and frequency. For example, a 5% AEP event has a 5% chance of being exceeded in any one year. This has replaced the return period concept. A 5% AEP event expresses the 20 year return period in more probability terms.

Antiseep Collar

An impermeable barrier, usually of concrete, constructed at intervals within the zone of saturation along the conduit of a primary outlet pipe to increase the seepage length along the conduit and thereby prevent piping or seepage in the compacted fill material along the outside of the pipe.

Area of Disturbance

The area of exposed soil.

Baffles

Semi-permeable or solid barriers placed in a sediment retention pond to deflect or regulate flow and effect a more uniform distribution of velocities, hence creating better settling conditions.

Batter

A constructed slope of uniform gradient.

Berm

Narrow strip beside road.

BPO

Best Practicable Option.

Bulk Earthworks

This term is generally used to describe the cut to fill earthworks required to regrade an area. It also applies to larger scale earthworks such as for building excavations.

Catchment

A geographical unit within which surface runoff is carried under gravity by a single drainage system to a common outlet or outlets. Also commonly referred to as a Watershed or Drainage Basin.

Channel

That part of a watercourse system where normal flow is contained. The channel is generally incised into the flood plain and for many of the stable stream systems in New Zealand can be defined in capacity as being just able to accommodate the annual return period flow (100% AEP) without overtopping.

Also refers to an artificial conduit such as a ditch excavated to convey water.

Channel Stabilisation

Stabilisation of the channel profile by erosion control and/or velocity distribution through reshaping, the use of structural linings, mass blocks, vegetation and other measures.

Channel Storage

The amount of water temporarily stored in channels while *en route* to an outlet.

Clay (Soils)

A mineral soil consisting of particles less than 0.002 mm in equivalent diameter.

A soil texture class.

Clean Water

Any water that has no visual signs of suspended solids, e.g. overland flow (sheet or channelled) originating from stable well-vegetated or armoured surfaces.

Cohesion

The capacity of a soil to resist shearing stress, exclusive of functional resistance.

Cohesive Soil

A soil that, when unconfined, has considerable strength when air-dried and significant cohesion when submerged.

Compaction

For construction work in soils, engineering compaction is any process by which the soil grains are rearranged to decrease void space and bring them into closer contact with one another, thereby increasing the weight of solid material per unit of volume, increasing their shear and bearing strength and reducing permeability.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Concentrated Flow

The accumulation of sheet flow into discrete rills, gullies or channels, significantly increasing erosive forces.

Conduit

Any channel intended for the conveyance of water, whether open or closed.

Construction Staging - The phasing of bulk earthworks to minimise the area of bare earth exposed at any one time.

Contour

A line across a slope connecting points of the same elevation.

Contributing Drainage Area

All of that drainage area that contributes to the flow into a treatment device. A contributing drainage area can include both clean and sediment-laden water flows. Commonly referred to as the catchment area.

Crimping

The embedding of straw mulch into the soil surface by using implements such as a disc cultivator set at zero cut.

Critical 20 Year Return Period Storm

A rainfall event that has a 5% Annual Exceedance Probability and a duration equal to the Time of Concentration.

Cumulative Effect

The combination of discrete isolated effects, the sum of which can have a major long term detrimental impact.

Dam

A barrier to confine or raise water for storage or diversion, to create a hydraulic head, to prevent gully erosion, or to retain soil, rock or other debris.

Decant Rate

The rate at which surface water is decanted from a sediment retention pond.

Deposition

The accumulation of material that has settled because of reduced velocity of the transporting agent (water or wind).

Detention Dam

A dam, constructed for the temporary storage of storm flow, which releases the stored water at controlled rates in order to reduce flooding hazard downstream of the dam.

Dewatering

The removal of impounded water, generally by pumping. Refer Sump Pit.

Di-ammonium phosphate (DAP)

A high percentage nitrogen and phosphate fertiliser suitable for the rapid establishment of grass.

Disturbed Area

An area of exposed soil.

Diversion

A channel or bund constructed to convey concentrated flow.

Drainage

The removal of excess surface water or groundwater from land by means of surface or subsurface drains.

Drainage Basin

Refer Catchment.

Emergency Spillway

A Sediment Retention Pond or Dam spillway designed and constructed to discharge flow in excess of the structure's primary spillway design discharge.

Energy Dissipator

A designed device such as an apron of rip-rap or a concrete structure placed at the end of a water conduit such as a pipe, paved ditch or flume for the purpose of reducing the velocity and energy of the discharged water.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Ephemeral Watercourse

A watercourse that flows only part of the year; includes overland flowpaths such as grassland swales and dry gullies which only flow during more intensive rainstorms.

Erodible

An erodible soil is a soil that is readily entrained (moved) by actions such as rain drop impact, overland flow or wind.

Erosion and Sediment Control Plan (E&SCP)

A detailed Plan normally prepared by the Developer's engineer that details the way erosion is to be minimised and treatment of sediment-laden overland flow is to be undertaken.

Erosion Matting

A manufactured matting of either synthetic or natural fibre used to minimise surface erosion and in some cases, promote revegetation.

Erosive

Refers to the ability of erosional agents such as wind or water to cause erosion. Not to be confused with erodible, as a quality of soil.

Erosive Velocities

Velocities that are high enough to wear away the land surface. Exposed soils erode faster than stabilised soils. Erosive velocities vary according to the soil type, slope, and structural or vegetative stabilisation used to protect the soil.

Estuary

Area where fresh water meets salt water, where the tide meets the river current (eg., bays, mouths of rivers, salt marshes and lagoons). Estuaries serve as nurseries and spawning and feeding grounds for large groups of marine life and provide shelter and food for birds and wildlife. The majority of the estuaries in the Auckland region are low energy systems where sediment readily settles.

Evapotranspiration

The sum of surface evaporation and plant transpiration.

Fill

Earth placed (normally under a strict compaction regime) to raise the land surface.

Filter Blanket

A layer of sand and/or gravel designed to prevent the movement of fine-grained soils.

Filter Fabric

A woven or non-woven, water-permeable geotextile made of synthetic products such as polypropylene used for such purposes as preventing clogging of aggregate by fine soil particles. Refer Geotextile Fabric.

Filter Strip

A long, narrow vegetative planting used to retard or collect sediment for the protection of adjacent properties or receiving environments.

Fines (Soil)

Generally refers to the silt and clay size particles in soil.

Fire Breaks

Specific deforested strips within a forest to act as a barrier in the event of fire.

Flocculation

The process whereby fine particles suspended in the water column clump together and settle. In some instances this can occur naturally, such as when fresh clay-laden flows mix with saline water, as occurs in estuaries. Flocculation can be used to promote rapid settling in sediment retention ponds by the addition of flocculating chemicals (flocculants).

Flume

A high-velocity, open channel for conveying water to a lower level without causing erosion. Also referred to as a chute.

Gabion Basket

A flexible woven-wire basket composed of two to six rectangular cells filled with small stones. Gabions may be assembled into many types of structures such as retaining walls, channel liners, drop structures and groynes.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Geosynthetic Erosion Control Systems (GECS)

The artificial protection of erodible channels and slopes using artificial erosion control material such as geosynthetic matting, geotextiles or erosion matting.

Geotextile Fabric

A woven or non-woven, impermeable or semi-permeable material generally made of synthetic products such as polypropylene and used in a variety of engineering, stormwater management, and erosion and sediment control applications.

Grade

The slope of a road, channel or natural ground.

The finished surface of a channel bed, road bed, top of embankment or bottom of excavation. Any surface prepared for the support of construction like paving or for laying conduit.

To finish the surface of a channel bed, road bed, top of embankment or bottom of excavation.

Gravel

Aggregate consisting of mixed sizes of 5 mm to 75 mm particles which normally occur in or near old streambeds and have been worn smooth by the action of water.

Harvesting Management Plans

A plan detailing how the forest harvest operation is to be conducted to minimise earth disturbance and to maximise the protection of adjoining land and natural features such as watercourses and native vegetation.

Headwater

The source of a watercourse. The water upstream of a structure or point on a watercourse.

Hydrology

The science of the behaviour of water in the atmosphere, on the surface of the earth and underground.

Hydroseeding

The spraying of a slurry of seed, fertiliser and paper or wood pulp over a surface to be revegetated.

Impervious

Not allowing infiltration of water.

Industry Education Programme

An Erosion and Sediment Control training programme run by the ARC for Plan Implementors or Plan Preparers to increase knowledge and ownership of both principles and practices of erosion and sediment control. The programme allows participants to become ARC Registered in erosion and sediment control.

Landings

Forestry. A log production and assembly area.

Level Spreader

A device used to convert concentrated flow into sheet flow.

Mitigation

Measures taken to off-set adverse environmental effects caused by Land Disturbing Activities.

Mulch

Covering on surface of soil to protect it and enhance certain characteristics, such as protection from rain drop impact and improving germination.

Overburden (Quarries)

Unusable soil/rock stripped from above suitable production material.

Overland Flow Path

The route of concentrated flow.

Perennial Stream

A stream that maintains water in its channel throughout the year or maintains a series of discrete pools that provides habitats for the continuation of the aquatic ecosystem.

Permeability (Soil)

The rate at which water will move through a saturated soil.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Permitted Activity

An activity that does not exceed the thresholds specified by a Regional or District Plan whereby a resource consent is required (in the Auckland region, Land Disturbing Activities are controlled by rules specified by the Proposed Regional Plan: Sediment Control (PRPSC)). Permitted Activities must, however, meet certain performance standards in terms of minimising adverse effects.

Pervious

Allowing movement of water.

Poly aluminum Chloride (PAC)

A long chain chemical that is used as a flocculant in certain situations.

Primary Spillway

The Riser inlet within a Sediment Retention Pond.

Quarry Management Plans

A plan detailing how a quarry operation is to be conducted to minimise earth disturbance, to maximise the protection of adjoining land and natural features such as watercourses and native vegetation, and to minimise the effect on adjoining residents and/or landowners.

Rainfall Intensity

The volume of rainfall falling in a given time. Normally expressed as mm/hour.

Rehabilitation

Restoration to as near to pre-disturbance conditions as possible. This may entail such measures as revegetation for erosion control, enhancement planting, modification and armouring of watercourses.

Reno Mattress

A shallow (300-500 mm deep), wide, flexible woven-wire basket composed of two to six rectangular cells filled with small stones. Often used at culvert inlets and outlets to dissipate energy and prevent channel erosion.

Return Period

The statistical interpretation of the frequency of a given intensity and duration rainstorm event. Refer AEP.

Revegetation

The establishment of vegetation to stabilise a site.

Riparian Protection Area

An area adjacent to a watercourse designated as a non-disturbance zone to provide a buffer between receiving environments (eg. watercourses) and the area of operation.

Riser

In a Sediment Retention Pond, a vertically placed pipe to which decant pipes are attached, which forms the inlet to the primary spillway.

Saturation Point

In soils, the point at which a soil or an aquifer will no longer absorb any amount of water without losing an equal amount.

Scarified

Shallow subsurface disturbance with a tine implement to provide surface roughening. Utilised before topsoiling and revegetation.

Scour

The erosive or digging action of flowing water; the downward or lateral erosion caused by water. Channel-forming stream scour is caused by the sweeping away of mud and silt from the outside bank of a curved channel (meander), particularly during a flood.

Sediment

Solid material, both mineral and organic, that is in suspension, is being transported, or has been moved from site of origin by air, water, gravity, or ice and has come to rest on the earth's surface either above or below water.

Sediment Control Protection Area

The area 50 o landward of the edge of a watercourse or wetland of 1000 m² or more, or 100 o either side of a foredune, or 100 o landward of the coastal marine area (whichever is the more landward of mean high water springs). Inside this area and on hills with slopes greater than 15°, earth disturbance over areas of 0.25 has or greater or 100 o of tracking or trenching requires a resource consent.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Sediment Delivery Ratio

The proportion of the soil eroded from within a catchment area that actually reaches sediment treatment controls or waterbodies.

Sediment Texture

The relative proportions of different sized of sediment and soil particles that can be separated by screening. The size of sediment particulate. Refer Soil Texture.

Sediment Yield

The quantity of sediment discharged from a particular site or catchment in a given time, measured in dry weight or by volume. When erosion and sediment control measures are in place, sediment yield is the sediment discharged from the site after passing through those measures.

Settling

The downward movement of suspended solids through the water column.

Shear Strength

The ability to resist shear (slip) forces.

Sheet flow

Shallow dispersed overland flow.

Shutter Boards

Plywood or similar sheeting supported by light timber framing normally used for boxing concrete forms.

Silt

A soil consisting of particles between 0.05 and 0.002 mm in equivalent diameter. A soil textural class.

Silt Loam

A soil textural class containing a large amount of silt and small quantities of sand and clay.

Silty Clay

A soil textural class containing a relatively large amount of silt and clay and a small amount of sand.

Slash

Branches trimmed from production logs.

Small Site

Small areas of earth disturbance that normally do not require a Land Use Consent: Sediment Control, such as individual residential building sites. Refer Permitted Activities.

Soil

The unconsolidated mineral and organic material on the surface of the earth that serves as a natural medium for the growth of land plants.

Earth and rock particles resulting from the physical and chemical disintegration of rocks, which may or may not contain organic matter. Includes fine material (silts and clays), sand and gravel.

Soil Structure

Soil structure reflects the pore space within a soil available for aeration and storage of water. It is a measure of bulk density and as a rule the higher the soil bulk density the poorer the structure. The combination or arrangement of primary soil particles into secondary particles, units or peds. Good soil structure is important for plant growth.

Soil Texture

The relative proportions of various particle sizes in a soil material. Refer Sediment Texture.

Spreader (Hydraulics)

A device for distributing water uniformly in or from a channel.

Stabilisation

Providing adequate measures, vegetative and/or structural that will protect exposed soil to prevent erosion.

Stabilised Area

An area sufficiently covered by erosion-resistant material such as a good cover of grass, or paving by asphalt, concrete or aggregate, in order to prevent erosion of the underlying soil.

Subsoil

The B horizons of soils with distinct profiles. In soils with weak profile development, the subsoil can be defined as

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

the soil below the ploughed soil (or its equivalent of surface soil), in which roots normally grow.

Surface Runoff

Rain that runs off rather than being infiltrated or retained by the surface on which it falls.

Surface Water

All water with its surface exposed to the atmosphere.

Suspended Solids

Solids either floating or suspended in water.

Swale

A constructed elongated depression in the land surface that can be seasonally wet, is usually heavily vegetated, and is normally without flowing water. Swales conduct stormwater into primary drainage channels and can provide some groundwater recharge.

Tackifier

A compound that is added to straw mulch to bind it together and prevent it being blown around by the wind.

Temporary Watercourse Crossing

A stable watercourse crossing that is installed for the duration of an operation and is removed in its entirety at the completion of the operation.

Tensile Strength

Resistance to elongation and tearing.

Time of Concentration

The time for runoff to flow from the most remote part of the drainage area to the outlet.

Toe (of Slope)

Where the slope stops or levels out. Bottom of the slope.

Topsoil

Fertile or desirable soil material (suitable organic and structural properties) used to top-dress roadbanks, subsoils, parent material, etc to provide a suitable medium for plant growth.

Unified Soil Classification System (Engineering)

A classification system based on the identification of soils according to their particle size, gradation, plasticity index and liquid limit.

Uniform Flow

A state of steady flow occurring when the mean velocity and cross-sectional area are equal at all sections of a reach.

Universal Soil Loss Equation

An equation used for the design of a water erosion control system:

$A = RKLSCP$ where:

A = the soil loss in tons per ha per annum

R = the rainfall factor

K = the soil erodibility factor

LS = the slope length and gradient factor

C = the vegetation factor

P = the surface roughness factor

Water Body

Any type of surface water such as watercourses, lakes and wetlands.

Watercourse

Any pathway for concentrated overland flow, including rivers, streams and ephemeral channels.

Watershed

Refer Catchment.

Water Table

The upper surface of the free groundwater in a zone of saturation; locus of points in soil water at which hydraulic pressure is equal to atmospheric pressure.

Water Table Drain

A drain that parallels a carriageway to drain surface and subsurface water from the road formation.

erosion&sedimentcontrol

Guidelines for Land Disturbing Activities in the Auckland Region

Auckland Regional Council, 1995: *Proposed Regional Plan: Sediment Control*

Auckland Regional Council Technical Publication No. 51
1994: *Storm Sediment Yields from Basins with Various Landuses in Auckland Area*

Auckland Regional Council Technical Publication No. 53
1995: *The Environmental Impacts of Urban Stormwater Runoff*

Auckland Regional Council Technical Publication No. 69
1996: *The Environmental Impacts of Accelerated Erosion and Sedimentation*

Department of Natural Resources and Environmental Control, Delaware, USA 1989: *Delaware Erosion and Sediment Control Handbook*

Environment B.O.P. Guideline, 1993: *Forest Operations Guidelines*

Environment B.O.P. Guideline No. 1, Version 2, 1996: *Erosion and Sediment Control Guidelines for Earthworks*

Environment B.O.P. Guideline No. 2: *Erosion and Sediment Control Guidelines for Quarries*

Environment Protection Section, ACT Government, Australia, 1989: *Guidelines for Erosion and Sediment Control on Building Sites*

Environment Waikato Technical Publication No. 1995/8, 1995: *Design Guidelines for Earthworks, Tracking and Crossings*

Goldman, S.J. Jackson, K, Bursztynsky, T.A. 1986: *Erosion and Sediment Control Handbook. McGraw-Hill. USA*

Herald, J.R. 1989: *Hydrological impacts of urban development in the Albany Basin, Auckland. PhD Thesis, University of Auckland*

Maryland Department for the Environment, Maryland, USA, 1994: *Maryland Standards and Specifications for Soil Erosion and Sediment Control*

New Zealand Logging Industry Research Organisation, 1993: *New Zealand Forest Code of Practice*

NSW Department of Housing, Australia, 1993: *Soil and Water Management for Urban Development*

State of North Carolina, USA, 1988: *Erosion and Sediment Control Planning and Design Manual*

USDA-Soil Conservation Service, Syracuse, New York, 1991: *New York Guidelines for Urban Erosion & Sediment Control*

Winter, R, 1998: *Predicting Sediment Yield During the Earthworks Development Stage of a Subdivision, Auckland, and Assessment of the Efficiency of a Sediment Retention Pond. MSc Thesis, University of Waikato*